

USDA-FOREST SERVICE

Index File No. R-20

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or Survey No. \_\_\_\_\_ Cor. No. \_\_\_\_\_


T 4S R. 30E

R.D. Ukiah County Umatilla

Merid. Willamette

N.F. Umatilla State Oregon

CORNER DIAGRAM

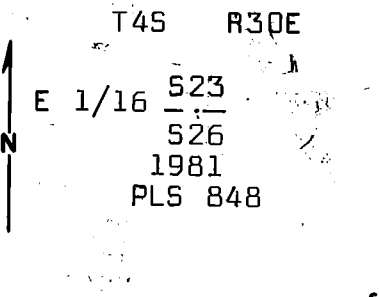

DESCRIBE CORNER MONUMENT FOUND

Corner not previously established.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

N/A

PHOTO IDENTIFICATION DATA

Photo No. \_\_\_\_\_  
Filed At. \_\_\_\_\_  
Object Ident. \_\_\_\_\_  
Ident. By \_\_\_\_\_  
*Signature*

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner is in draw bottom on the section edge, approximately 600' Easterly from a fork in the draw.

PLANE COORDINATE POSITION DATA

State \_\_\_\_\_ Zone \_\_\_\_\_  
X \_\_\_\_\_  
Y \_\_\_\_\_  
Estab. By \_\_\_\_\_  
*Agency*

*Signature*

Title PLS Division \_\_\_\_\_ Headquarters Mt. Vernon, OR Date 7/27/81 7100-52-(3.68)

2

2

3

4

5

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 3"x30" galv. iron pipe with 3" brass cap stamped as shown on the diagram, set 26" in the ground.

From which:

ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A fir 16" dia. bears N17°E, 7.2 ft. scribed E 1/16 S 23 BT.  
A fir 16" dia. bears S33°W, 7.2 ft. scribed E 1/16 S 26 BT.  
Set steel post with warning and boundary signs 5' N and 5'E from corner. Nailed bearing tree signs and brass washers stamped PLS 848 to each tree and painted a red band around each tree.

Work Done By D.M. Ferguson Title Surveyor Date 7/27/81 State Registration No. OR PLS 848  
Agency

Certified Cor. Record Prepared? Yes  No Filed At: Umatilla Co. Surveyor's Office Date 10/81

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

REMARKS

Witnesses to above corner:

D. Mitchell Ferguson  
Jeff Smith

OREGON  
JULY 12, 1968  
DOUGLAS M. FERGUSON  
848  
Index File No. T.