

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

R633

102

FIELD NOTES

101


OF THE

REMONUMENTATION OF CERTAIN ORIGINAL CORNER POINTS,

TOWNSHIP 1 NORTH, RANGE 36 EAST,

INDEX DIAGRAM

Township 1 North Range 36 East

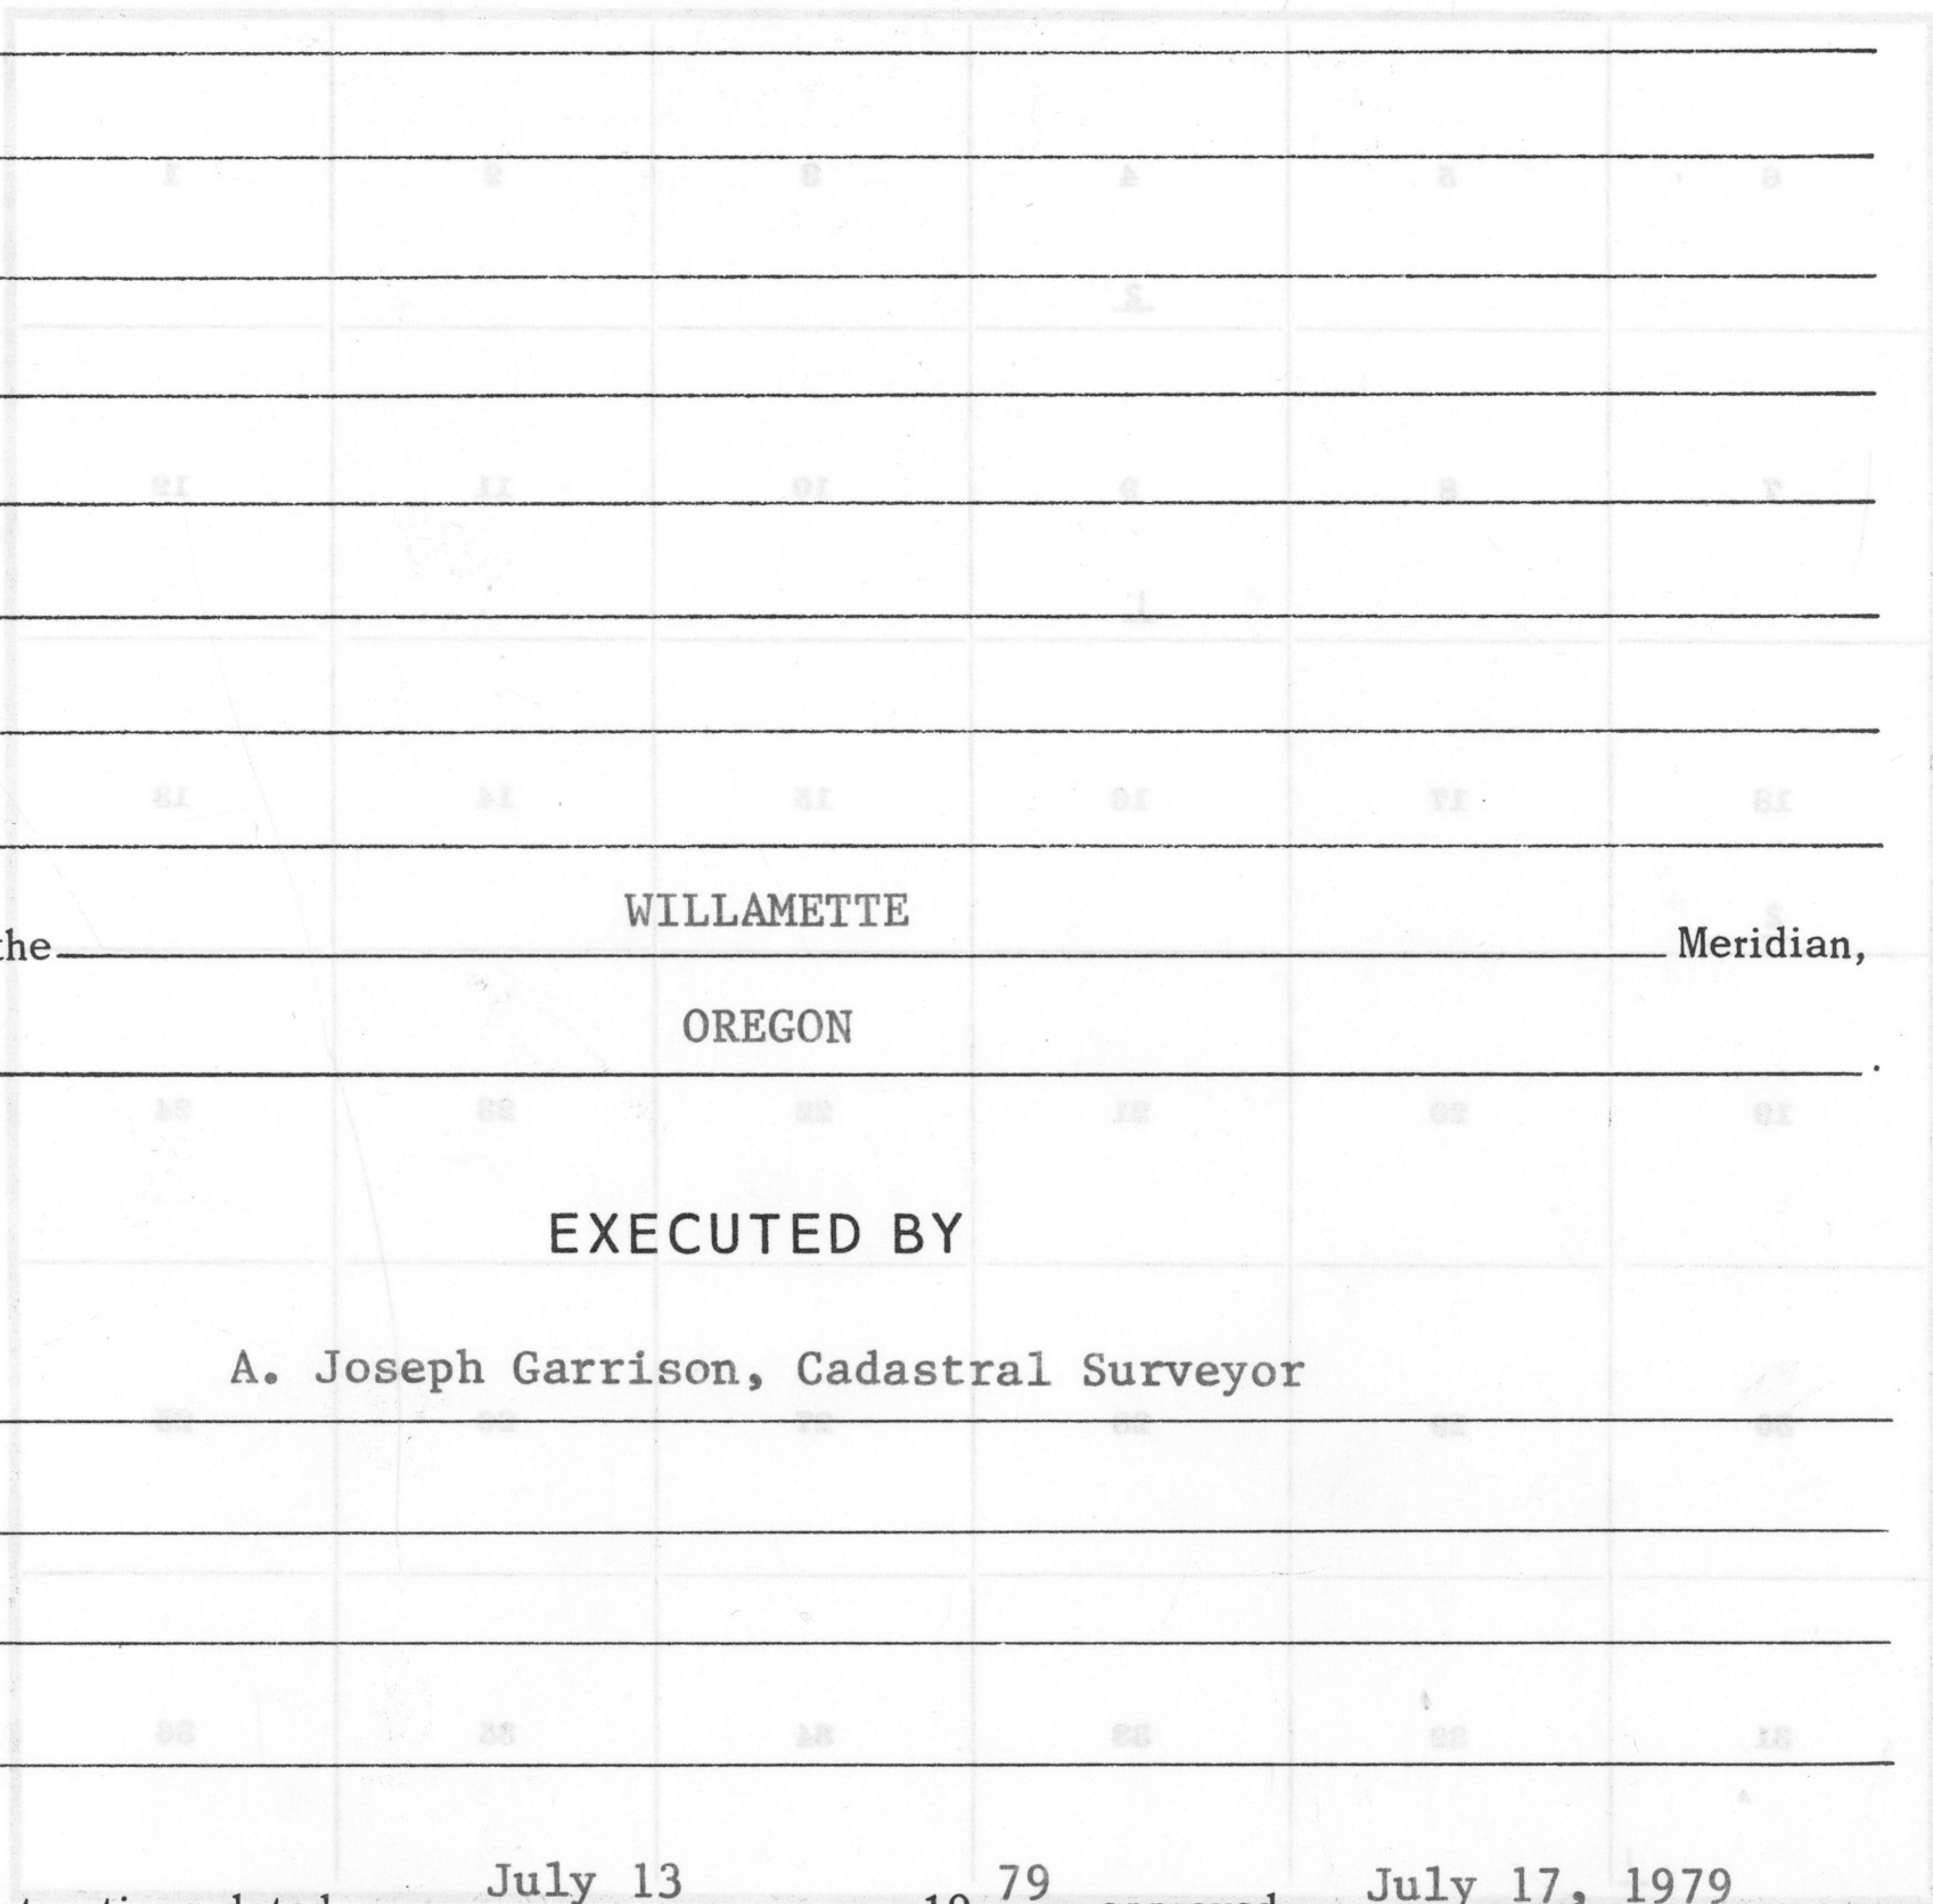

Of the WILLAMETTE Meridian,

In the State of OREGON

EXECUTED BY

A. Joseph Garrison, Cadastral Surveyor

Under special instructions dated July 13, 19 79, approved July 17, 1979.

_____, which provided for the surveys included under U.S. Survey/Group
Number 1000, and assignment instructions dated July 6, 1982.

Survey commenced July 12, 19 82

Survey completed July 14, 19 82

R633

102

FIELD NOTES

103

OF THE

REMONUMENTATION OF CERTAIN ORIGINAL CORNER POINTS,

TOWNSHIP 1 NORTH, RANGE 36 EAST,

INDEX DIAGRAM

Township 1 North, Range 36 East

6	5	4	3	2	1
		<u>2</u>			
7	8	9	10	11	12
		<u>1</u>			
18	17	16	15	14	13
<u>2</u>					
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

which provided for the surveys included under U.S. Survey Group

1982

July 6

and assignment instructions dated

1000

Number

19 82

July 12

Survey commenced

19 82

July 14

Survey completed

Remonumentation of Certain Original Corner Points,
T. 1 N., R. 36 E., Willamette Meridian, Oregon

T. 1 N., R. 36 E., Willamette Meridian, Oregon

CHAINS

The following field notes describe the remonumentation of certain original corner points, township 1 north, range 36 east, Willamette Meridian, Oregon, as provided for in the Special Instructions, Group No. 1000, Oregon, dated July 13, 1979, "Investigation of Physical Evidence of Corner Positions and Accessories, Followed by Remonumentation of Corner Points, with New Accessories When Needed."

The remonumentation of original corner points was made at the request of the United States Forest Service, in conjunction with their Land Line Location Program.

The mean magnetic declination is 20° 30' E.

Willamette Base Line, Through R. 36 E.,
Willamette Meridian, Oregon

(Remonumenting a corner established by Jacob C. Cooper,
U. S. Deputy Surveyor, in 1881)

The standard cor. of secs. 31 and 32 only, on the S. bdy. of the Tp., determined at record bearing and distance from the remains of the original bearing trees:

A decayed pine snag, 30 ins. diam., bears
S. 80° W., 63 lks. dist., with scribe
marks T1S R36E S6 visible on open blaze.

At the corner point

Set an aluminum post, 28 ins. long, 2½ ins. diam., 24
ins. in the ground, with aluminum cap mkd.

SC
T 1 N R 36 E

S 31 | S 32

1982

from which new bearing trees

A fir, 17 ins. diam., bears N. 8½° E.,
121 lks. dist., mkd. T1N R36E S32 SC BT.

A pine, 16 ins. diam., bears N. 9° W.,
43 lks. dist., mkd. T1N R36E S31 SC BT.

Subdivisions, T. 1 N., R. 36 E.,
Willamette Meridian, Oregon

(Remonumenting corners established by Herman D. Gradon,
U. S. Deputy Surveyor, in 1882)

The ¼ sec. cor. of secs. 9 and 16, monumented with the
original basalt stone, 17 x 6 x 5 ins., loosely set 3
ins. in the ground, mkd. ¼ on N. face, from which the
original bearing trees:

A pine, 27 ins. diam., bears S. 24° E., 70 lks.
dist., with healed blaze. (Record, S. 20° E.,
73 lks.)

105

Remonumentation of Certain Original Corner Points,
T. 1 N., R. 36 E., Willamette Meridian, Oregon

CHAINS

A pine, 17 ins. diam., bears N. 70° W., 46 lks. dist., with healed blaze. (Record, N. 80° W.)

At the corner point

Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.

T 1 N R 36 E

¼ $\frac{S 9}{S 16}$
1982

Deposit corner stone alongside aluminum post.

The ¼ sec. cor. of secs. 4 and 9, determined at record bearing and distance from the original bearing tree:

A fir, 32 ins. diam., bears S. 50° W., 135 lks. dist., with scribe mark 1 visible on partially opened blaze.

At the corner point

Set an aluminum post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground, to solid rock, in a mound of stone, 3½ ft. base, to top, with aluminum cap mkd.

T 1 N R 36 E

¼ $\frac{S 4}{S 9}$
1982

from which a new bearing tree

An alder, 11 ins. diam., bears N. 12° E., 58 lks. dist., mkd. ¼ S4 BT.

The ¼ sec. cor. of secs. 18 and 19, determined at record bearing and distance from the remaining original bearing tree:

A double pine, 16 ins. diam., bears N. 45° E., 105 lks. dist., with scribe marks BT visible on open blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, to solid rock, in a mound of stone, 2 ft. base, to top, with brass cap mkd.

T 1 N R 36 E

¼ $\frac{S 18}{S 19}$
1982

from which a new bearing tree

A pine, 12 ins. diam., bears S. 29½° E., 43½ lks. dist., mkd. ¼ S19 BT.

CERTIFICATE OF SURVEY

(I) ~~(We)~~, A. Joseph Garrison, Cadastral Surveyor, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 13th day of July, 19 79, (I) ~~(We)~~ have remonumented certain original corner points, township 1 north, range 36 east,

of the Willamette Meridian, in the State of Oregon, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 15, 1982

(Date)

A. Joseph Garrison
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
~~Denver, Colorado~~
Portland, Oregon

The foregoing field notes of the remonumentation of certain original corner points, township 1 north, range 36 east, Willamette Meridian, Oregon,

executed by A. Joseph Garrison, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

May 30, 1986

(Date)

William W. Glenn
~~Chief, Cadastral Survey Examination and Approval Staff~~
Chief Cadastral Surveyor of Oregon

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

(Date)

~~Chief, Cadastral Survey Examination and Approval Staff~~
Chief Cadastral Surveyor of Oregon