

Amended

FIELD NOTES

Of the survey of the Subdivisional

Lines of Township 1. South

Range 35 East Willamette Meridian,

Oregon, as surveyed by James J. Currier and

James O. Waland  
U. S. Deputy Surveyor, <sup>Chief and Special</sup> under ~~his~~ Contract No. \_\_\_\_\_

dated May 7<sup>th</sup> 1887.

Survey commenced, June 29<sup>th</sup> 1887

Survey completed, July 3<sup>d</sup> 1887

NAMES AND DUTIES OF ASSISTANTS.

- ....., Compassman.
- Frank Belshaw, Chainman.
- Guy Davis, Chainman.
- ....., Chainman.
- ....., Chainman.
- B. B. Crowder, Axeman.
- ....., Axeman.
- ....., Flagman.

6378

PRELIMINARY OATHS OF ASSISTANTS.

We, Frank Belshaw & Guy Davis

do solemnly swear that we will faithfully execute the duties of Chain Carriers; that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the Subdivisional lines of T. South Range 35 East Willamette Meridian, Oregon.

Frank Belshaw, Chainman.  
Guy Davis, Chainman.

Subscribed and sworn to before me, this 29<sup>th</sup> day of June 1887.

[SEAL.] James E. Holland  
U.S. Deputy Surveyor

We, J. B. B. Crowner and

do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our

skill and ability, in the survey of the Subdivisional lines of T. S. R. 35 East Willamette Meridian, Oregon.

J. B. B. Crowner, Axeman.  
J. B. B. Crowner, Axeman.

Subscribed and sworn to before me, this 29<sup>th</sup> day of June 1887.

[SEAL.] James E. Holland  
U.S. Deputy Surveyor

# INDEX

Referring the Lines to the Pages of the Field Notes.

T. *1 South* R. *35 East* Will. Mer.

6	<i>18</i>	5	<i>6</i>	4	<i>1</i>	3	2	I
<i>21</i>		<i>20</i>		<i>8</i>		<i>3</i>		
7	<i>22</i>	8	<i>9</i>	9	<i>4</i>	10	11	12
<i>24</i>		<i>23</i>		<i>10</i>				
18	<i>25</i>	17	<i>12</i>	16		15	14	13
<i>28</i>		<i>27</i>		<i>13</i>				
19	<i>29</i>	20	<i>14</i>	21		22	23	24
<i>31</i>		<i>30</i>		<i>14</i>				
30	<i>32</i>	29	<i>17</i>	28		27	26	25
<i>34</i>		<i>33</i>						
31	<i>36</i>	32		33		34	35	36

Meanders of ..... Pages ..... to .....

Meanders of ..... Pages ..... to .....

Subdivisions of T. 1 South R. 35 East -  
Willamette Meridian, Oregon.

(8093-10 M.)

West-on true line bet: Secs. 6 & 7  
 -var. 23° 30' E.

1000 Leave pine opening enter thick timber

3060 creek water in holes. Course N.W. - 50

4000 Set a post - ~~35 x 3 x 3~~ <sup>ful-long square</sup> ins, 24 in the ground for 1/4 Sec. Cor. marked 1/4 S. on N. face. I raised a mound of stone along side. *his impracticable*

4666 I intersect West boundary of the Township 4.23 chs. N of cor. W Secs. 1 & 12, of T. 1 S. R. 34 E. I set a post - ~~45 x 4 x 4~~ <sup>ful-long square</sup> ins, 24 ins in the ground for C. Cor. to Secs. 7 & 6. marked C.C. on E. T. 1 S. R. 34 E. S. 6 on N. R. 34 E. S. 1 on N. S. 7 on S. 4 inches on S. and North edges

from which a pine 24 ins in diam - bears N 75° E dist - 94 lks. ~~00~~

Mkd T. 1 S. R. 35 E. S. 6, B. T.

A pine 12 ins in diam ls. 585° N dist 54 lks. Mkd. T. 1 S. R. 34 E. S. 1 ~~on~~ B. T.

no other trees in limits - raised stone mound along side

Land rolling. Covered with pine & fir timber & dense undergrowth. <sup>36.66 chs,</sup> Soil 2nd rate

Subdivisions of T. 1 South R. 30 East -  
Willamette Meridian, Oregon.

South Bel. Secs. 7 & 8.

Var.  $23^{\circ} 30' E$

1100 leave opening enter timber

2350 Gulch. Course n.w. Heavy timber - 20

4000 Set a post - ~~35~~<sup>41-long Square</sup> ~~3~~<sup>2</sup> 4 ins in the ground

for  $\frac{1}{4}$  Sec. Cor. marked  $\frac{1}{4} S.$  on n. face

from which a fir 16 ins in diam  
bears.  $N 30^{\circ} E$  dist - 35 lks. Marked  $\frac{1}{4} S. B.P.$

A fir 24 ins in diam. ls. S. 60 n. dist -  
80 lks. Marked  $\frac{1}{4} S. B.P.$

4066 Indian trail n.w. & S.E.

8000 Set a post - ~~45~~<sup>41-long Square</sup> ~~4~~ ins in

the ground for. Cor. to Secs. 7, 8, 17 & 18

Marked T/S. 58. on N.E. R. 30-E. S. 17 on

S.E. S. 7 on N.W. S. 18 on S.W. faces.

5 notches on the E. & 4 on the S. edges.

from which a pine 20 ins in diam

ls.  $S 45^{\circ} E$  dist - 33 lks. Marked T/S,

R. 30-E. S. 17 B.P. A pine 24 ins in

diam bears.  $N. 60^{\circ} E$  dist - 12 lks. Marked

T/S. R. 30-E. 58 B.P.

Subdivisions of T. 1 South R. 35 East -  
Willamette Meridian, Oregon.

(8093-10 M.)

A pine 36 ins in diam bears S 35° W,  
dist 86 lks. marked T. 1 S. R. 35 E. S. 18  
B.P. a Tamarack 40 ins in diam,  
fs. N 60° W. 64 lks. marked T. 1 S. R. 35  
E. S. 4 B.P.

Land falling covered with heavy  
pine fir and tamarack timber of  
medium size Huckleberries and pine  
grass. 69.00 chs Soil 2nd rate

East on road, bet. Secs. 8 + 17

Var. 22° 15' E

40.00 Del. imp 1/4 Sec. Cor.

80.15 Intersect - N + S. line 26 lks. S of Cor.  
of Secs. 8, 9, 17 + 18

Thence I run S 89° 49' W. on true line  
bet. Secs - 8 + 17 Var. 20° E

10.00 Wagon road course N. W. + S. E.

40.07 Del. a post <sup>1/2</sup> ~~36~~ x <sup>1/2</sup> ~~3~~ x 3. in <sup>1/2</sup> ~~2~~ 4 ins in the  
ground for 1/4 Sec. Cor. Marked 1/4 S on  
N. face. from which a pine 4 ins

Subdivisions of T. / South R. 30 East -

Willamette Meridian, Oregon.

in diam be. N. 15° E dist - 20 lks. marked  
1/4 S. B.P. A tamarack 18 ins in diam  
be. N. 40° W. dist - 45 lks. Marked 1/4 S. B.P.

80.15' to Cor. to Secs. 7, 8, 17 & 18

Land rolling covered with Heavy  
Pine Timber 80.10' chs.

Soil 2nd rate

Next on True Line Bet Secs. 7 & 18

Var 22° 10' E

1000 enter Thick Timber

2000 leave " "

4000 Set a post - ~~36 x 36~~ <sup>ful lang. Square</sup> 24, ins in the  
ground for 1/4 Sec. Marked 1/4 S. on  
N. face. From which a pine 24  
ins in diam bears at 50° E dist - 78  
lks. Marked 1/4 S. B.P. A tamarack  
16 ins in diam. bears. S 40° E dist:  
67 lks. marked 1/4 S. B.P.

47.00 Set: To line 47.70 chs. N. of Cor. to Secs.

25

345

Subdivision of T. / Smith R. 35 East-

Willamette Meridian, Oregon.

(8093-10 M.)

12713 of P. / S. R. 34 E. Set a basal-  
stone 12 x 10 x 8 ins in the ground  
for closing Cor. 15 Dec. 78/8. Marked C.C.,  
and D. face and 4 notches on the  
S and 2 on N. edges. raised a  
stone mound around it. this in-  
practicable -

Land rolling, Soil 2nd rate  
Pine and fir timber with openings  
Jewel bunch & pine grass

Smith Bel- Dec. 17 & 18

Var 22° 10' E

Enter pine opening

4000

Set a post <sup>up-lang</sup> ~~36 x 36~~ square,  
24 ins in  
The ground for 1/4 Dec. Cor. mtd  
1/4 S. on N. face. from which  
a pine 24 ins in diam bears. S 60° E  
dist 38 lbs. marked 1/4 S. B.F. a  
pine 16 ins in diam bears. S. 80°

Subdivisions of T. 1 South R. 35 East -

Willamette Meridian, Oregon.

W. dist. 32 lks. marked 1/4 S. B. P.

5500 Enter Thick timber

8000 Set a post - ~~48 x 48~~ <sup>ful-dang square</sup> 48 in sq 2 ft - in the

ground for Cor. to Secs. 17, 18, 19 & 20

marked S 19 on S. W. S 18 on N. W. T. 15,

S 17 on N. E. R. 35 E. S 20 on S. E. <sup>land</sup>

5 Notches are E and 3 on S edges

from which a fir 20 ins in diam.

to N. 45° E dist 15 lks. mtd. T. 15,

R. 35 E. S 17 B. P. A fir 16 ins in dia,

to S 20° E dist 15 lks. mtd. T. 15 R.

35 E S 20 B. P. A pine 4 ins in diam

to S 60° W. dist 46 lks. mtd T. 15. R. 35

E. S 19. B. P. A pine 5 ins in diam

to N 60° W dist 62 lks. mtd T. 15. R.

35 E. S. 18 B. P.

Land rolling Covered with heavy  
pine fir and Tamarack timber

with under growth of same 2000 lbs  
good grass in openings 5000 lbs

Soil 2nd Rate

Subdivisions of T. 1 South R. 30 East -  
Willamette Meridian, Oregon.

(8093-10 M.)

Eastward. Bel-Decs. 14 & 20  
Mar. 1933

4000 Del-imp. 1/4 Sec. Cor.

8000 Intersect-N & S. line at Cor. to Secs.  
16, 17, 20 & 21,

12000 Found I run N on true line  
bet. Secs. 17 & 20 - var. 18 1/4 E.  
Wagon road Course S.E. & N.W.

13000 Gulch Course N.W. -50 - 50

4000 Del-a post-<sup>ful-lang</sup> 3 ~~5~~ ~~3~~ 3 ins, 2 1/2 ins in  
The ground for 1/4 Sec. Cor. marked  
1/4 S. on N. face from which  
a fir 20 ins in diam bears N  
42° E dist. 14 lks. Mkd. 1/4 S B.P. A  
fir 20 ins in diam to N. 42° W.  
dist-33 lks. mkd 1/4 S. B.P.

6670 Head of a draw Course N.W. -20

8000 to Cor. of Secs. 17, 18, 19 & 20,

Land rolling covered with pine  
fir & spruce timber & underbrush  
good grass in openings. Soil 2nd rate

Subdivisions of T. 1 South R. 30 East -  
Willamette Meridian, Oregon.

West-on true line Bel-Secs. 18419  
Var 195E

- 9.80 Indian Trail Course S. E.
- 22.80 Enter Thick timber
- 40.00 Set-a post - <sup>4 ft long</sup> ~~3~~ <sup>square</sup> ~~3~~ <sup>sq</sup> ~~3~~ <sup>sq</sup> 24 ins in the ground - for 1/4 Sec. Cor. Mtd. 1/4 S on N face. From which a pine 5 ins in diam. bears S 60 E dist - 45 lks. Mtd. 1/4 S B.P. A pine 20 ins in diam. ls. N 45 W. dist 34 lks. Mtd 1/4 S B.P.
- 44.24 Entered - to line 5.29 chs. N. of Cor. to Secs. 13 & 24 of T. 1 S. R. 34 E. Set-a post - <sup>4 ft long</sup> ~~4~~ <sup>square</sup> ~~4~~ <sup>sq</sup> ~~4~~ <sup>sq</sup> 24 ins in the ground for closing cor. to Secs. 18419. Mtd. T. 1 S R. 34 E. S. 13 on W. face. T. 1 S R 36 E S 18 on N. E. S 19 on S. C.C. on E. with 3 notches on the N & S. edges. From which a Pine 16 ins in diam. ls. N 80 E dist - 44 lks marked. T. 1 S. R. 30 E. S 18 ~~00~~ B.P. A pine 20 ins in diam. ls. S. 80 E dist - 50 lks.

Subdivisions of T. 1 South R. 30 East

Willamette Meridian, Oregon.

(8093-10 M.)

Mkd. T. 1 S. R. 30 E S 19 ~~00~~ B. T.  
 and raised a  
 Monument of Stone along side  
 Land rolling covered with heavy  
 pine fir and tamarack timber  
 with under brush of the same 24.44 ch  
 22.80 lbs.  
 Good grass in openings, Soil 2 ind soil.

South Bel-Decs. 19 & 20

Jan. 1908

10000 chs. Enter pine opening

30000 Leave

40000 Set a post - <sup>ful long square</sup> ~~36 x 36~~ 3 in, 24 in in the

ground for 1/4 Sec. Cor. marked 1/4 S. cor

W. face. From which a tamarack

8 ins in diam to S 25° E dist 25 lbs.

Mkd 1/4 S B.T. Tamarack 8 ins in diam.

To. At 40000 dist 5 lbs. Mkd. 1/4 S. B.T.

Enter opening

80000 Set a post - <sup>ful long square</sup> ~~40 x 40~~ 4 in, 24 in in the

ground for. Cor. to Secs. 19, 20, 29 & 30

Subdivisions of T. 1 S. 17th R. 35-E. S. 29

Willamette Meridian, Oregon.

Wkd. T. 1 S S 20, on N.E. R. 35-E. S. 29  
 on S.E. S 19 on N.W. S 30 on S.W.  
 and 2 notches on S. and 3 notches on  
 The East: edges raised a mound of  
 stone along side. This impracticable  
 Land rolling Covered with scatt-  
 ering pine and Tamarack timber  
 and good bunch grass  
 Soil 2nd rate

East - on road. Bel: Secs. 20 & 29  
 Var. 19° 15' E

4000 Sil-Temp 1/4 Sec. Cor.

8000 Intersect - N & S line at - Cor. W - Secs.

20, 21, 28 & 29.

Thence I run West - on true line  
 at Sect 20 & 29 - Var. 18 1/4° E

3375 draw course N.W. - 20

4000 Sil - a post - ~~36 x 2 x 3~~ ins <sup>ful-lang</sup> square 24 ins in the

ground. For 1/4 Sec. Cor. Wkd 1/4 S.

on N. face. From which a pine 24

ins in diam. To N 30° E dist. 86

Subdivisions of T. / South R. 35-East-  
Willamette Meridian, Oregon.

(8093-10 M.)

Yes. Mtd. 1/4 S. B.S., A tamarack 6 ins  
in diam - Yes. S 10 W dist. 15 Mts. Mtd.  
1/4 S. B.S.

4840 Leave timber

8000 W Cor. to Secs. 19, 20, 29 + 30.

Land covering covered with  
open pine and tamarack timber  
good grass Soil 2nd rate

West-on true line bet. Secs. 19 + 30  
Var. 19° 16' E

12.50 Begin to descend

33.70 Corner Course S -600 -600

4000 Set a basalt-stone 12 x 8 x 14 ins  
10 ins in the ground for 1/4 Sec. Cor.  
Mtd. 1/4 on N. face. raised a  
mound of stone along side pit's intersection  
+200 +200

49.00 Intersect - To line 0.84 chs. N. of Cor.  
to Secs. 24 + 20, S. 15 R. 34 E. Set a bas-  
all-stone 12 x 8 x 6 ins 9 ins in the

Subdivisions of T. 1 South R. 35 East -

Willamette Meridian, Oregon.

ground for <sup>closing</sup> C. C. to Secs. 19 + 30  
 marked with 2 notches on the S.  
 and 4 notches on the N. edges. and  
 C. C. on East-face. raised a mound  
 of stone around it - <sup>+300</sup> Ypts impracticable  
 Land Broken mountains 49.00 chs.  
 good bunch grass  
 Soil 3rd rate.

Surveyed July 2nd 1887

South Pl.; Secs. 29 + 30

Tor 190/5'E

- 1000 Leave Table land descend
- 1600 descend rim rock 40 ft -
- 2600 gulch S. W. - 200
- 4000 Sil-a basalt-stone 20x12x6 ins  
 15 ins in the ground for 1/4 Sec. Cor.  
 Wtd 1/4 on N. face. raised stone  
 mound around it - Ypts impracticable -100
- 4075 gulch C. S. W - 400

353

Subdivision of T. 1 South R. 35 East

Willamette Meridian, Oregon.

(8093-10 M.)

62.45 ME Kay Creek 15 lks. wide course W <sup>-500 -500</sup>

8000 Sil-a Basalt-stone 12x12x8 ins 8 ins  
 in the ground for Cor. to Secs. 29, 30,  
 31 & 32 marked with 1 notch on the S,  
 and 5 on the East edges raised a  
 mound of stone around it - pits  
 impracticable <sup>+800 +800</sup>

Land extremely rough and mount-  
 ainous 8000 chs.

Scattering pine timber on S side of <sup>Canon</sup> canyon  
 Soil rocky 4th rate.  
 Bunch Grass on north side.

East on true line bet Secs. 29 & 32

Var 19° 30' E

8.47 gulch course W. <sup>-200 -200</sup>

17.60 Summit - near timber <sup>+100 +100</sup>

30.76 creek 5 links wide course W. <sup>-500 -500</sup>

4000 Sil-a Basalt-stone 10x10x6 ins 4  
 ins in the ground in a small  
 glade for 1/4 Sec. Cor. Mtcd. 1/4 mi

Subdivision of T. / Smith R. 35 East -  
Willamette Meridian, Oregon.

N. face raised a mound of stone  
around it - pits in practicable + 150  
59.00 Intersect - U. R. Bdy. 5.63 chs. N. 20° E  
of 55 1/2 M. Post. Set a basalt-stone  
20 x 16 x 8 ins 15 ins in the ground for  
C<sup>losing</sup> Cor. to Secs. 29 + 32, Marked U. R. C. C.  
an N. face raised a stone mound  
around it - all trees in limits - de-  
cayed by fire pits impracticable  
Land mountainous 59.00 chs.  
Line running on steep side of Canon  
Pine fir and Tamarack timber  
Soil rocky 4 <sup>th</sup>/<sub>11</sub> rate

West - on true line bet - Secs. 30 + 31 -  
Var 19° 30' E

20.30 Canon. Course N. W. - 400  
33.00 Summit of Point - + 300  
40.00 Set a basalt-stone 9 x 8 x 7 ins 6  
ins in the ground for 1/4 Sec. Cor.

Subdivisions of T. 1 South R. 35 East -  
Willamette Meridian, Oregon.

(8093-10 M.)

mtd. 1/4 on N. face raised a stone  
 mound around it - pits in practicable  
 4700 ditch course N. W. -150 - 100  
 4897 Int. T line 598 chs. N. of the Cor.  
 of Secs. 20 + 36. T. 1 S R. 34 E. Set a  
 post - <sup>ful long</sup> 48 x 4 x 4 ins. <sup>Square</sup> 24 ins in the ground for closing <sup>Cor.</sup> to Secs. 30 + 31 Mtd T.  
 1 S R. 35 E. 530 on N. S 31 on S.  
 T. 1 S R. 34 E. 525 on W and C.C. on  
 E. face. 1 notch on the S and  
 5 on N edges from which a Tam-  
 arack. 6 ins in diam. to N. 45° E dist.  
 45 lks. mtd. T. 1 S R. 35 E. 530 ~~C.C.~~ B.D.  
 A Tamarack 6 ins in diam. to S 20° E  
 dist 23 lks. mtd T. 1 S R. 35 E. 531 ~~S.~~  
 B.D. raised a mound of stone along side  
 Land Mountians 48.97 chs.  
 very little timber -  
 Soil 4 rate

361 Copy

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by *James T. Currier* and *James O. Koland*, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field notes of the survey of the *Subdivision* lines of *Township 1 South Range 35 East* Williamette Meridian, Oregon, showing the respective capacities in which they acted:

- ....., Compassman.
- ....., Chainman.
- ....., Chainman.
- Frank Belshaw*, Chainman.
- Guy Davis*, Chainman.
- B. B. Crowney*, Axeman.
- ....., Axeman.
- ....., Flagman.

FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted *James O. Koland* and *James T. Currier*, U. S. Deputy Surveyor, in surveying all those parts or portions of the *Twp 1 South Range 35 East* of ..... Williamette Meridian, Oregon.

as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- ....., Compassman.
- ....., Chainman.
- ....., Chainman.
- Frank Belshaw*, Chainman.
- Guy Davis*, Chainman.
- B. B. Crowney*, Axeman.
- ....., Axeman.
- ....., Flagman.

Subscribed and sworn to before me, this *15<sup>th</sup>* day of

*July* ..... 18*87*  
[SEAL] *James O. Koland*  
*U. S. Deputy Surveyor*

FINAL OATH OF DEPUTY SURVEYOR.

We *James P. Currier and James E. Holman*  
United States Deputy Surveyors do solemnly swear that in pursuance of

instructions received from *Douglas W. Taylor*

U. S. Surveyor General for Oregon, bearing date of *13<sup>th</sup>*

day of *May* 18*87*, I have well, faithfully and truly, in <sup>my</sup> own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor General for Oregon, the Surveying Manual, and the laws of the United States, surveying all those

parts or portions of *the Subdivisional lines of Township 1. South Range 35 East.*


<sup>amended</sup> Willamette Meridian, in the State of Oregon, as are represented in the foregoing field notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions, the special written instructions of the U. S. Surveyor General for Oregon, and in the specific manner described in the field notes, and that the foregoing are the true field notes of such survey, and should any fraud be detected I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.

*James P. Currier*  
*James E. Holman*  
U. S. Deputy Surveyor. O

Subscribed and sworn to before me, this *6<sup>th</sup>*

day of *May* 18*90*

*Heriman Berenshoer*  
*Notary Public*  
*for Oregon*

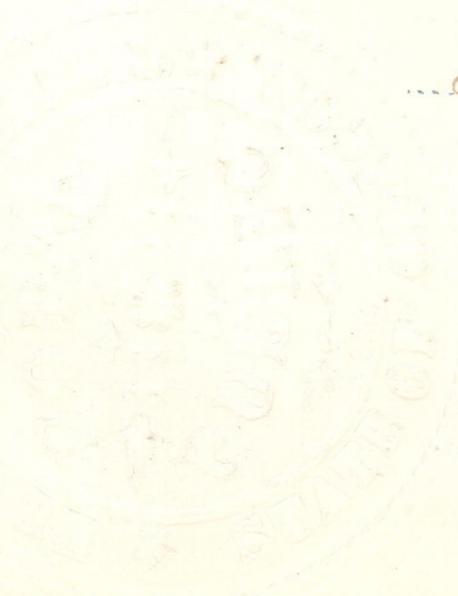

## Office U. S. Surveyor General,

Portland, Oregon, *June - 4 - 1890*The foregoing <sup>*amended*</sup> Field Notes of the Survey of the*Subdivisional lines of  
Township 1 South Range  
35 East Will Mar Oregon*executed by *James P. Currier and James  
C. McLeod* U. S. Dept Surveyors  
under his contract No. *1111*, dated *May**7th* 1887, having been critically examined, the  
necessary corrections and explanations made, the said Field  
Notes and the survey they describe, are hereby approved.*Douglas W. Taylor*  
Surveyor General.