


OREGON CORNER RESTORATION FORM

Section 6 Township 1N Range 32E
 County Umatilla Date: December 26, 2009

Corner Designation: 1N32C1 Condition Report Only
 Not found
 Remonumented
 Unrecorded
 Surveyed in
 Referenced out

Previous Renewals / Surveys, etc.
 Corner originally set by Josiah A. Burnett under contract No. 92 Dated September 12, 1860.
 His record reads: Set a post for 1/4 sec. cor., drove charred stake and raised mound with trench
 as per instructions.

Monument and Accessories found: (condition and source)
 None. The point falls in a farmed field.

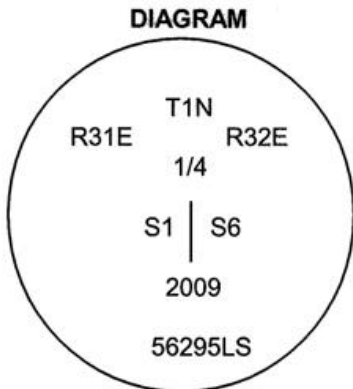

Sketch showing a mound of stones, a gully, and a bird guzzler. The mound is 6' diam. x 1' high. The gully is labeled "Bottom of Gully". The bird guzzler is labeled "Bird Guzzler" and "S.W. Corner of guzzler bears N32°50'E 404.02'".

⊗ = Brass Cap
 ● = Rebar Reference

MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)
 Set a 1 1/2" x 30" galvanized iron pipe with a 2 1/2" brass cap stamped as shown in the diagram above at the proportionate point. The cap is 20" below the surface of the farmed field.

For references, I set four 5/8" by 24" iron rebars with 1 1/4" Orange plastic caps stamped WTS and 56295LS as described below:
 an iron rebar bears S46°03'47"E, 51.61 feet 20" below the surface of the field;
 an iron rebar bears S48°53'18"W, 67.81 feet 20" below the surface of the field;
 an iron rebar bears N29°42'28"W, 319.87 feet in a stone mound with a guard post and sign;
 an iron rebar bears N16°05'05"E, 388.67 feet with a steel guard post and monument sign;

The monument was set and references tied using a Trimble R7/R8 RTK GPS system.

Location and comments
 NAD 83/1991 State Plane Coordinate
 Oregon North Zone
 N=707,284.33 ift
 E=8,618,959.45 ift

Compass Declination

Surveyors Seal

RECEIVED BY:
 Umatilla County Surveyor
 Date: 12-10
 Rec'd By: KK
 No. 10-93-C

Witness Tree Surveying
 Address
 P.O. Box G
 Pilot Rock, Or. 97868
 Party Chief
 Stephen K, Haddock

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Stephen K. Haddock

OREGON
 JULY 9, 2001
 STEPHEN K. HADDOCK
 56295LS

RENEWAL DATE 6-30-11