

**OREGON CORNER RESTORATION FORM**

Section 30 Township 1N Range 32E  
 County Umatilla Date: August 21, 2009

Corner Designation: 1N32V5

Condition Report Only  
 Not found  
 Remonumented  
 Unrecorded  
 Surveyed in  
 Referenced out

Corner to sections 29, 30, 31, and 32, T1N, R32E,  
 W.M., Umatilla County, Oregon.


Previous Renewals / Surveys, etc.

Corner was originally set by Daniel Chaplin under contract No. 107 dated September 21, 1864.  
 His record reads: Set stone, 20 x 12 x 8, for corner to secs. 29, 30, 31 and 32. David L. Haddock  
 under survey 97-145-C states: Set railroad spike and three reference monuments.

Monument and Accessories found: ( condition and source )  
 I found the railroad spike and references from 97-145-C in good condition.

**DIAGRAM**

**SKETCH**

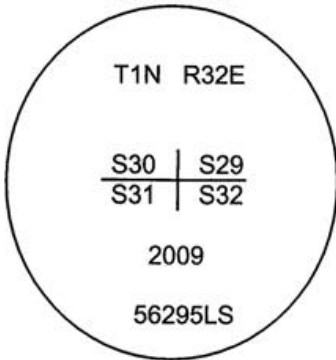

**MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)**

I removed the railroad spike and replaced it with a 2 1/2" brass cap on a 5/8" x 15" iron rod cemented into the asphalt. The cap is stamped as shown in the diagram above.

For references: I made no change to the references from 97-145-C.

The monument was tied using a Trimble R7/R8 RTK GPS system.

Location and comments  
 NAD 83/1991 State Plane Coordinate  
 Oregon North Zone  
 N = 683,530.82 ift  
 E = 8,625,239.25 ift

Compass Declination

Surveyors Seal

RECEIVED BY:  
Umatilla County Surveyor  
 Date: 6-10  
 Rec'd By: KK  
 No. 10-93-C

Firm / Agency  
 Witness Tree Surveying  
 Address  
 P.O. Box G  
 Pilot Rock, Or. 97868  
 Party Chief  
 Stephen K, Haddock

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*Stephen K. Haddock*

OREGON  
 JULY 9, 2001  
 STEPHEN K. HADDOCK  
 56295LS

RENEWAL DATE 6-30-11