


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Currin and Noland under GLO contract dated MAY 4, 1887. Surveyor General record states:
Intersect U.R. bdy 20.08 Nch. N20°E 49th mile cor. Set Basalt stone 8x10x20 ins. 15 ins. in the ground for closing cor. to Secs. 26 and 27 marked U. R. C. C on N face.
Raised mound of stone over it.

T 1 N R 35 E

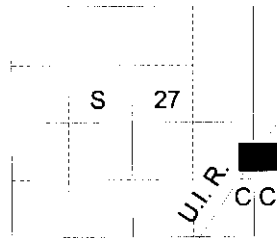

Corner reestablished by Marius Buchanan under GLO contract number 635, dated April 19. 1895. This was corrected at a later date bearing same contract number. Surveyor General field notes for correction survey state:

Intersect U.I.R. Bdy at C.C. established by me. The post set by me has been taken away and replaced by the one set by U.S. Dept. Surveyor Curran and Noland which is a tamarack post marked U.R. on the W and C.C. on the E in the mound raised by me, from which:
A pine 20 ins. diam. bears S60 1/2W. 86 lks. dist., marked T1N R35E S27 BT.
There being no tree within limits in Sec 26 I now build a mound of stone 2 1/2" ft. base, 1 1/2 ft. high E of cor. The former witness being erroneous, I destroy the marks thereon.

In Umatilla County monumentation record 83-189-R, Gary Langlitz monuments corner to County standard based on a found pine stump and mound of stone. Corner record states:

At the corner point established along the West side of the original stone mound and at record bearing and distance from the remains of the only original bearing tree, we set a 2" x 30" galvanized iron pipe, 12" in the ground to bedrock and in a mound of stone 6'x3'x1 1/2' high, with brass cap attached, marked. From which we mark new bearing trees:
A 10" douglas fir, scribed "CC T1N R35E S26 BT" on a double blaze bears S55°E, 52.4 feet.
An 8" ponderosa pine, scribed "CC T1N R35E S27 BT" on a double blaze bears S43°W 68.5 ft.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found 2 1/2" iron pipe with 2 1/2" brass cap marked as shown below, lying horizontally loose along the ground alongside a mound of stone 5 ft. diam. I reestablish the monument position from the bearing trees established by Langlitz.

A 21 inch Douglas Fir bears South 57° East, a distance of 52.40 feet, alive and vigorous with a healed double blaze.
A 19 inch Ponderosa Pine bears South 45° West, a distance of 68.50 feet, alive and vigorous with a healed double blaze.
A pine stump bears South 62° West, a distance of 56.7 feet with visible scribe marks and chaining notch.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At position established from the bearing trees, I reset the 2 1/2" iron pipe monument, 12 inches in the ground to bedrock, in a mound of stone 3 ft. diameter.

I hereby certify that the corner was perpetuated on November 6, 2012.

Witness: Rick Robinson



Renewal Date: June 30, 2013

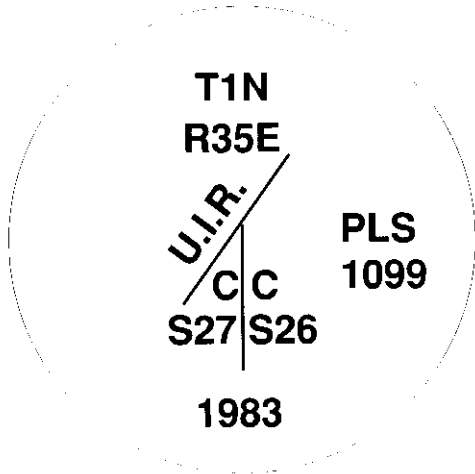

RECEIVED BY

Umatilla County Surveyor
Date: 12/14/2012
Rec'd By: [Signature]
No.: 13-145-B

I used a steel tape and magnetic compass in the recovery of the bearing trees. I used 16° East magnetic declination and the bearings and distances are to the center of root crown.