

OREGON CORNER RESTORATION FORM

Section 10 Township 3N
County Umatilla Date: 08/31/09

Range 29E

Corner Designation: 3N29E13

Corner common to sections 3,4,9 and 10 T3NR29E.

- Condition Report Only
- Not Found
- Remonumented
- Unrecorded
- Surveyed In
- Referenced Out

Previous Renewals / Surveys, etc.

Originally Surveyed by N.H. Gates in 1859. He set a post in a mound of earth.

Zahner remonumented with a Granite rock 6"x13"x18" in private survey Book 1, Page 103.

D. Haddock computed the location under survey 98-155-C.

S. Haddock monumented w/ a 1 1/4" x 30" galvanized iron pipe w/ a 2 1/2" B.C. based on D. Haddock survey.

Monuments and Accessories Found: (Condition and Source)

Found A 2 1/4" B.C.


Found a 5/8" Iron rebar w/opc #56295 lies S 9°30' E, 43.62'.

Found a 1/2" Iron rebar w/rpc "DEA Control" lies N 42°15' E, 7.43'.


Found a 5/8" Iron rebar w/opc #56295 lies N 81° E, 39.29'.

Found an "X" cut into the southeast lifting eye of the irrigation pump lies N 66°30' W, 92.69'.

Diagram



Sketch

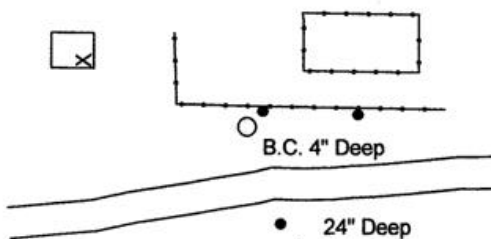

NAD 83/91
OREGON STATE PLANE NORTH
INTERNATIONAL FEET

N766828.83
E8537972.74

LAT - 45° 45' 44.93562" N
LON - 119° 11' 02.08063" W

Monument (s) Set (Procedures and Description)

None.

References Set:

None.

Location and Comments

The corner is .5 miles south of the intersection of Irwin Rd. and S. Ash Rd., on S. Ash Rd., and .5 miles east on a gravel road.

Compass Declination

17° E

Surveyors Seal

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. English
OREGON
JANUARY 11, 2005
ROBERT DOUGLAS ENGLISH
43406LS

RECEIVED BY:

Date: 1-11
Rec'd By: KK
No. 11-10-R

Firm / Agency

Survey One, LLC.
P.O. Box 382
Pendleton, OR 97801
(541) 276-2055

RENEWAL DATE: 12/31/09