

**OREGON CORNER RESTORATION FORM**

Section 9 Township 3N Range 29E  
 County Umatilla Date: May 21, 1998

Corner Designation: 3N29J13

Section corner common to sections 9, 10, 15, and 16,  
 T3N, R29E, W.M.



Condition Report Only  
 Not found  
 Remonumented  
 Unrecorded  
 Surveyed in  
 Referenced out

Previous Renewals / Surveys, etc.

Corner originally established by Gates in 1859 under contract No. 84 was a post in a mound of earth with charcoal. PE 5408 set a brass cap at the position of a found charred stake in a mound of stones in survey H-4-B.

Monument and Accessories found: ( condition and source )

Found the brass cap set by Staebler in good condition in a mound of stones approximately five feet north of an existing fence corner.

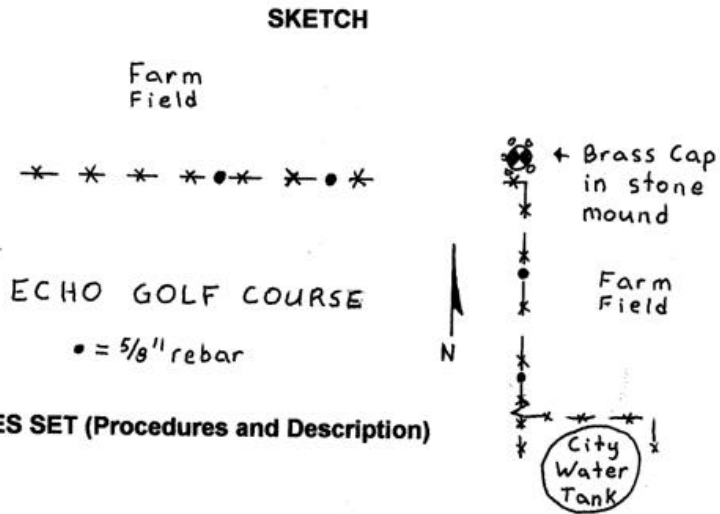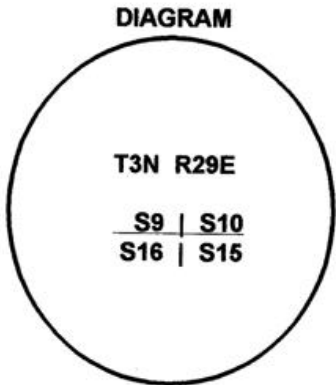

**MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)**

**REFERENCES SET:**

- A 5/8" x 24" rebar with a 1 1/8" red plastic cap stamped ORLS 852 and WALS 13922 bears N89°30'52"W, 35.58 feet under the existing fence.
- A 5/8" x 24" rebar with a 1 1/8" red plastic cap stamped ORLS 852 and WALS 13922 bears N89°48'50"W, 70.99 feet under the existing fence.
- A 5/8" x 24" rebar with a 1 1/8" red plastic cap stamped ORLS 852 and WALS 13922 bears S1°06'01"E, 61.88 feet under the existing fence.
- A 5/8" x 24" rebar with a 1 1/8" red plastic cap stamped ORLS 852 and WALS 13922 bears S1°57'57"E, 32.09 feet under the existing fence.

Location and comments

Compass Declination

Surveyors Seal

RECEIVED BY:  
Umatilla County Surveyor  
 Date: 8-98  
 Rec'd By: KK  
 No. 98-155-C

Firm / Agency  
 Haddock Surveying  
 Address  
 P.O. Box 1574  
 Pendleton, Or. 97801  
 Party Chief  
 Stephen K, Haddock

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*David L. Haddock*

OREGON  
 JULY 12, 1988  
 DAVID L. HADDOCK  
 852

RECEIVED BY  
 Umatilla County Surveyor  
 Date: \_\_\_\_\_  
 Rec'd By: \_\_\_\_\_  
 No. \_\_\_\_\_