

FIELD NOTES


Of the survey of the Subdivisional
Lines of Township 2 South Range
36 East of, Willamette Meridian,
Oregon, as surveyed by Rufus S. Moran

U. S. Deputy Surveyor, under his Contract No. 451
dated June 12, 1882

Survey commenced, September 20th 1882
Survey completed, September 29th 1882

NAMES AND DUTIES OF ASSISTANTS.

-, Compassman.
- James Guttridge, Chainman.
- John Guttridge, Chainman.
-, Chainman.
-, Chainman.
- Joe Parodi, Axeman.
-, Axeman.
-, Flagman.

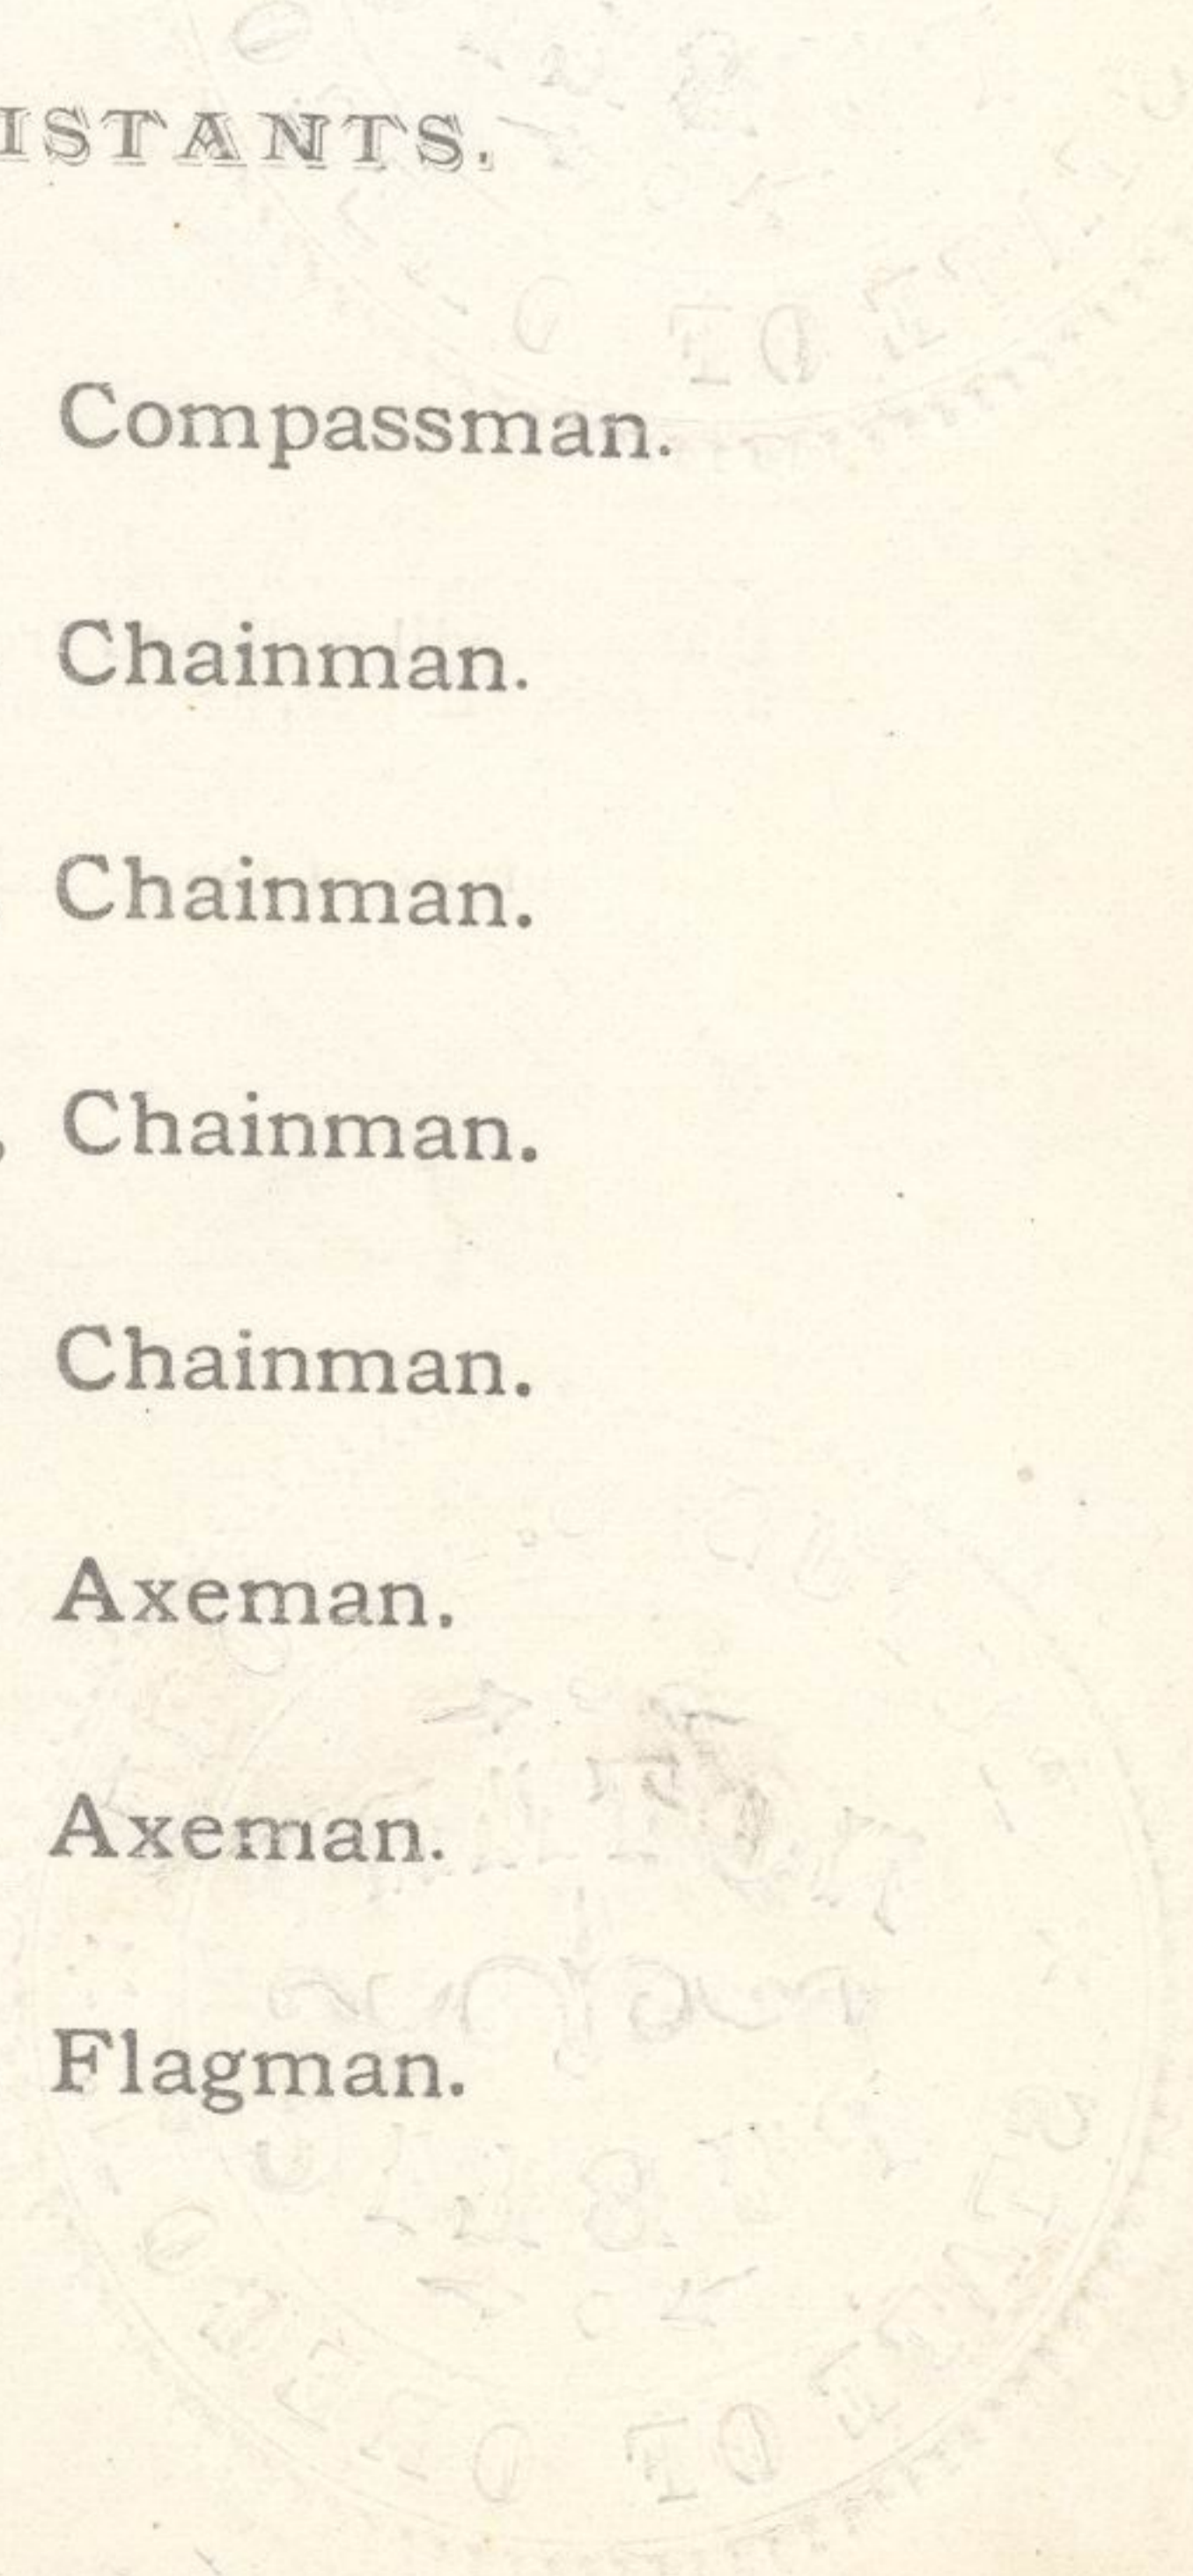

INDEX.

Referring the Lines to the Pages of the field Notes.

T. *2 South* R. *35 East* Will. Mer.

6	103	5	76	4	58	3	38	2	20	1							
-----		101	-----		75	-----		56	-----		37	-----		18			
7	99	8	73	9	54	10	35	11	16	12							
-----		98	-----		96	-----		71	-----		53	-----		34	-----		14
18	94	17	69	16	51	15	32	14	12	13							
-----		92	-----		91	-----		68	-----		49	-----		31	-----		10
19	89	20	66	21	48	22	29	23	9	24							
-----		86	-----		85	-----		65	-----		46	-----		27	-----		7
30	84	29	63	28	44	27	25	26	5	25							
-----		82	-----		81	-----		62	-----		43	-----		24	-----		3
31	78	32	61	33	41	34	22	35	1	36							

Meanders of ----- Pages ----- to -----

Meanders of ----- Pages ----- to -----

pages 942 + 943
are blank

Subdivision of T. 2 South R. 35 East

Willamette Meridian, Oregon.

944
945
946
947
948
949
950

Preliminary to commencing this
Survey I run North on a blank
line on East boundary of sec. 36
and at 39,91 chs I found the
 $\frac{1}{4}$ sec. cor. and at 79,92 chs I
found the sec. cor.

Thence I run, commencing
at the township cor.

S 89° 49' W On a blank line on the
South boundary of Sec 36, and
at, 40,05 chs, I found the $\frac{1}{4}$ sec. cor.
and at 80,05 chs, I found the
sec. cor. My Compass will
therefore run the same line as
the Exterior boundaries and the
chaining practically agrees

Subdivision of T. 2 South R. 35 East

Willamette Meridian, Oregon.

48.00 Dry gulch course South

80.16 Intersect E. boundary of the township 14. M. South of the cor. to sec. 30, 31, 35 & 36, which is a Bassett stone 15 x 12 x 8 in ground of stone marked with 1 notch on S and 5 notches on W edge from which

A pine 20 ins. in dia. bears N 53° W 57 M. dist. marked T 2 S R 35 E S 25 B F

A pine 36 ins. in dia. bears N 55 E 60 M. dist. marked T 2 S R 36 E S 30 B F

Thence I run

S 89° 54' W on a true line bet. Secs. 25 & 36 with same Var

40.08 Set a base alt stone 14 x 8 x 7 in 10 ins in ground for 1/4 sec. cor. marked 1/4 on N. face from which

A pine 10 ins. in dia. bears N 47° W 125 M. dist. marked 1/4 S B F

A pine 5 ins. in dia. bears S 47° W 37 M. dist. marked 1/4 S B F

80.16 The cor. to sec. 25, 26, 35 & 36

Land high & mountainous

Locs 2" & 3 rats

Subdivision of T. 2 South R. 35 East
Willamette Meridian, Oregon.

Heavily timbered with pine fir &
tamarack and some dense
undergrowth of ^{vine, fir, tamarack} and
mountain laurel

North between Secs 25 & 26
T. 21 East

10,00 Descend bearing W & S E

25,00 Dry gulch course N E, 150 ft. below
point of descending

29,60 Dry ravine course S E, 50 ft. below
last gulch

40,00 Set a basalt stone 14 x 8 x 7 ^{1/2} 10 ins
in ground for 1/2 sec. cor, 100 ft.
above ravine, marked 1/4 on W.
face, from which

A pine pine ridge bearing N 73° E 179 lb.
dist, marked 1/4 S B J, and raised
a mound of stone along side

Pits impracticable

50,00 Dry gulch course S W 30 ft.

953

-6-

Subdivision of T. 2 South R. 35 East
Willamette Meridian, Oregon.

about $\frac{1}{4}$ sec. cor.

64.00 Top of hill bears NW & SE 150 ft.
above last dry gulch

74.00 Dry gulch course W 30 ft. below
top of hill

80.00 Ditto basalt stone 18 x 12 x 10, ⁱⁿ 12 in
in ground for cor. to sec. 23, 24,
25 & 26, 30 ft. above gulch,
marked with 2 notches on S and
1 notch on E. edge.

from which

A tamarack 18 in. in dia. bears N 16° E
23 N. dist. marked. T 2 S R 35 E,
S 24 B F

A tamarack 20 in. in dia. bears N 19° W
45 N. dist. marked. T 2 S R 35 E
S 23 B F

A pine 9 in. in dia. bears S 67° W 64 N. dist.
marked. T 2 S R 35 E S 26 B F

A pine 20 in. in dia. bears S 21° E 24 N.
dist. marked. T 2 S R 35 E S 25 B F

Land high and mountainous

Subdivision of T. 2 South R. 35 East

Willamette Meridian, Oregon.

Soil 3rd rate, are stone
Timber scattering pine, tamarack
and fir and some undergrowth
of pine, tamarack and fir.

East on a random line bet. Sec. 24 & 25
Va. 18° 15' East

5.00 Enter glade bear W & S.

9.00 Leave glade bear W & S.

9.50 Top of hill bear W & S, 100 ft.
above sec. cor.

39.00 Descend hill bear W & S & W

40.00 Set temporary to sec. cor. 20 ft. below
top of hill

80.30 Intersect East boundary of the
township 35 lks. North of the cor. to
sec. 19, 30, 24 & 25, 300 ft below

$\frac{1}{4}$ sec. cor. which is a post 4 in sq.
marked T 2 S R 30 E S 19 on NE, S 24 on NW
R 35 E S 25 on SW and S 30 on SE faces, with
2 notches on S and 4 notches on N. edge. from which

A tamarack Quis. india. bear N 75° W 18 lks.

dot, marked - T 2 S S 24 B F

Subdivision of T. 2 South R. 35 East

Willamette Meridian, Oregon.

A fir *Quercus indica* bears N 78° E 12 lbs. dist
marked J 2 S 19 B F

A tamarack *Quercus indica* bears S 39° E 27 lbs. dist
marked R 36 E S 30 B F

A pine *Quercus indica* bears S 48° W 51 lbs. dist
marked R 35 E S 25 B F

Thence run

N 89° 45' W on a true line bet. Dies 24 & 25, with same var

40.15 Set a basal stone 16 x 16 x 16 ^{wt} 11 in. in

ground for 1/4 sec. cor. marked 4 on N.

fra.

from which

A pine 40 in. *Quercus indica* bears N 13° W 46 lbs. dist,
marked 4 S B F.

A pine 8 in. *Quercus indica* bears S 22° E 112 lbs. dist,
marked 4 S B F

80.30 The crosses, 23, 24, 25 & 26

Land high and mountainous

Soil 5" rate.

Heavily timbered with pine tamarack

and fir and dense undergrowth of pine

tamarack ^{fir} _{fir} mount laurel 76, 30 ch

Subdivision of T. 2 South R. 35 East
Willamette Meridian, Oregon.

North between Secs, 23 & 24

γ_a , $18^{\circ} 15'$ East

2,00 Descend hill bears NE & SW

23,50 Dry gulch course W 100 ft. below
sec. cor,

40,00 Detached stone $14 \times 12 \times 10$ ^{ins} 10 ins.
inground for $\frac{1}{4}$ sec. cor. 50 ft. at or
dry gulch, marked $\frac{1}{4}$ on W. face
from which

A tamarack 22 ins. in dia bears $N43^{\circ} E$

34 lbs. dist. marked $\frac{1}{4}$ S B J.

A pine 32 ins. in dia bears $N68^{\circ} W$ 34 lbs. dist.
marked $\frac{1}{4}$ S B J

41,00 Dry gulch course W, 20 ft. below
 $\frac{1}{4}$ sec. cor.

71,50 Dry gulch course $N20^{\circ} E$ 100 ft. below
last gulch

80,00 Detached 4 ft long 4 ins. sq; 24 ins in
ground for sec. cor. to Secs, 13, 14, 23 & 24

50 ft. above last gulch, marked

γ_2 S. R 35 E S 13 on NE

γ_2 S R 35 E S 14 on NW

969

10.

Subdivision of T. 2 South R. 35 East
Willamette Meridian, Oregon.

S 23 on SW and S. 24 on SE
faces, with 3 notches on SW and
1 notch on SE edge, from which
A pine 6 ins. in dia. bears N 46° E 23 R. dist.
marked J 2 SW 35 E D 13 B F,
A pine 6 ins. in dia. bears N 88° W 22 R. dist.
marked J 2 SW 35 E 8 14 B F
A pine 6 ins. in dia. bears S 77° W 8 R. dist.
marked J 2 SW 35 E S. 23 B F
Tamarack 2 1/2 ins. in dia. bears S 46° E 23 R. dist.
marked J 2 SW 35 E S. 24 B F.

Land high and mountainous
Soil 2" rate,

Heavily timbered with pine,
tamarack and firs with undergrowth
of fern and mountain laurel

Eastward on road bet. Dec. 13 & 24
To 18° 30' East

3,90 Dry gulch course N E 50 ft. below sea,
cor. And Ascend

Subdivision of T. 2 South R. 35 East 961
Willamette Meridian, Oregon.

18.50 Top of hill bears W & S, 250 ft. above
Dry gulch

22.00 Descend hill bears W & S,

35.57 Dry gulch course N 40° E 300 ft.
below top of hill

40.00 Set temporary 1/4 sec. cor.

48.50 Dry gulch course W & E

80.25 Enters creek bottom bears N 20° E & S
S 20° W 500 ft. below 1/4 sec. cor.

80.54 Intersect East boundary of the township
30 R. North of the cor. to sec. 18, 19,

13 & 24, which is a past 4 in. sq.
marked T 2 S S 18 on N E - R 35 E S 13 on NW
T 2 S S 24 on S W - R 36 E S 19 on S E. faces
with 3 notches on NW & S edges. - from which

Apine pins, in dia. bears S 72° W 59 R. dist.
marked R 35 E S 24 B F

Apine pins, in dia. bears N 78° W 42 R. dist.
marked T 2 S S 13 B F

Apine pins, in dia. bears N 70° E 60 R. dist.
marked R 36 E S 18 B F

Apine pins, in dia. bears S 64° E 123 R. dist.
marked T 2 S S 19 B F

Thence I run

N 89° 39' W on a true line bet. Desc. 13 & 24 ^{with same Var}

40.27 Set a post 3 ft. long 3 in. sq. 2 1/2 in. in.
ground for 1/4 sec. cor., marked 1/4 S.
on NW face, from which

Subdivision of T. 2. South R. 35 East
Willamette Meridian, Oregon.

5500 Top of hill bears NW + SE 30 aft.
above 1/4 sec, cor.

8054 Intersect East boundary of the town
ship 49 lks. North of the cor. to sec.

7, 18, 12 & 13, which is a post 4 in sq +
marked F 2 S S 7 on NE - F 2 S S 12 on N. W.
R. 35 E S 13 on SW and R 36 E S 18 on SE face,
with 4 notches on S and 2 notches on N. edges, from which

A pin 24 ins. in dia. bears N 30° W 9 lks. dist
marked F 2 S S 12 B F

A pin 48 ins. in dia. bears N 53° E 20 lks. dist
marked F 2 S S 7 B F

A pin 6 ins. in dia. bears S 7° E 4 lks. dist
marked R 36 E S 18 B F

A pin 36 ins. in dia. bears S 43° W 9 lks. dist
marked R 35 E S 13 B F

Spencer Iron

N 89° 39' W on a true line bet. Secs. 12 & 13, ^{with lamn bar}

4027 Set of basalt stone 14 x 10 x 6 ⁱⁿ 10 in in
ground for 1/4 sec, cor. marked 1/4 on
N. face from which

A pin 24 ins. in dia. bears N 28° W 5 lks. dist,
marked 1/4 S B F

A pin 36 ins. in dia. bears S 53° W 17 lks.
dist. marked 1/4 S B F

8054 The cor. to secs. 11, 12, 13 & 14

Land high and mountainous

Soil 2" rate. Heavily timbered

Subdivision of T. 2 South R. 35 East
Willamette Meridian, Oregon.

73.50 Dry ravine course S W 100 ft. above
Bed of creek

80.59 Intersect East boundary of township
49 lks. North of the cor. to sec. 6, 11,

12 12 200 ft. above dry ravine which

is a basal stone 18 x 12 x 8 in mound
of stone marked with 1 notch on W and 5 notches on
S. edges from which

A pine 20 ins. in dia. bears N 35° W 38 lks. dist
marked J 2 S S 1 B J

A pine 18 ins. in dia. bears N 41° E 103 lks. dist.
marked J 2 S S 6 B J

A pine 20 ins. in dia. bears S 46° E 15 lks. dist.
marked R 36 E S 7 B J

Thence I run

N 89° 39' W On a true line bet. Secs. 1 & 12, with same Var

40.30 Set a post 3 ft. long 3 ins sq. 24 ins in
ground for 1/4 sec. cor. marked 1/4 S on
W. of it. from which

A pine 10 ins. in dia. bears N 35° W 49 lks. dist.
marked 1/4 S B J

A pine 10 ins. in dia. bears S 5° W 23 lks. dist.
marked 1/4 S B J

80.59 The cor. to sec. 1, 2, 11, & 12
Land high and mountainous
Joni D'sate

FINAL OATH OF DEPUTY SURVEYOR.

1957

I, Rufus S. Moore

United States Deputy Surveyor, do solemnly swear that in pursuance of in-

structions received from James C. Selman

U. S. Surveyor General for Oregon, bearing date of the Twelfth

day of June, 1882, I have well, faith-
fully and truly, in my own proper person, and in strict conformity with
the instructions furnished by the U. S. Surveyor General for Oregon, the
Surveying Manual, and the laws of the United States, surveying all those

parts or portions of The Subdivisional Lines of
Town 2 South Range 35 East of

Willamette Meridian, in the State of Oregon, as are represented in the fore-
going Field Notes as having been surveyed by me and under my directions;
and I do further solemnly swear that all the corners of said survey have been
established and perpetuated in strict accordance with the Surveying Manual,
printed instructions, the special written instructions of the U. S. Surveyor
General for Oregon, and in the specific manner described in the field notes,
and that the foregoing are the true field notes of such survey, and should
any fraud be detected I will suffer the penalty of perjury under the pro-
visions of an Act of Congress approved August 8, 1846.

Rufus S. Moore
U. S. Deputy Surveyor.

Subscribed and sworn to before me, this 10th
day of February 1883

Benford Robb
Notary Public

1058

Office U. S. Surveyor General,

Portland, Oregon, June 5 1883

The following Field Notes of the Survey of the

Subdivisional lines of
T2 South, R. 35 East
Will. Meridian, Oregon,
executed by Rufus S. Moore

under his Contract No. 451, dated June 12th

1882, having been critically examined, the
necessary corrections and explanations made, the said field notes
and the survey they describe, are hereby approved.

James C. Tolman
Surveyor General.