

FIELD NOTES

Of the survey of the *Subdivisional*
 Lines of *Townships 2nd and 3rd North*
Range 36 East Willamette Meridian, Oregon,
 as surveyed by *Jas. P. Currier and Jas. Holand*

U. S. Deputy Surveyor, under his Contract No. _____

Dated *May 4th*, 188~~7~~⁷

Survey commenced, *Sept 13th*, 1887.

Survey completed, " *15th*, 1887.

NAMES AND DUTIES OF ASSISTANTS.

J. P. [unclear], Compassman.
J. D. Medley, Chainman.
W. H. Medley, Chainman.
Frank G. Bolshaw, Chainman.
Guy Davis, Chainman.
B. B. Crown, Axman.
H. Oratch, Axman.
Frank Hoons, Flagman.

519A

PRELIMINARY OATHS OF ASSISTANTS.

We,

J. D. Medley, H. H. Medley
Frank B. Blshaw and Guy Davis

do solemnly swear that we will faithfully execute the duties of Chain Carriers; that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in the survey

of the

Subdivisional lines of Townships 2nd & 3rd
North Range 36 East Willamette Meridian, Oregon.

J. D. Medley, Chainman.

H. H. Medley, Chainman.

Frank B. Blshaw, Chainman.

Guy Davis, Chainman.

Subscribed and sworn to before me this Thirteenth

day of Sept., 1887.

[SEAL.]

James P. Currier
U.S. Deputy Surveyor

We,

Frank Hoontz and
H. Reatch

do solemnly swear that we will well and truly perform the duties of Axmen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the

Subdivisional lines of T^s. 2 & 3 North
Range 36 E Willamette Meridian, Oregon.

Frank Hoontz, Axman.

H. Reatch, Axman.

Subscribed and sworn to before me this 13th

day of Sept., 1887.


[SEAL.]

James P. Currier
U.S. Deputy Surveyor

INDEX

Referring the Lines to the Pages of the Field Notes.

T. *3 North* R. *36 East* Will. Mer.

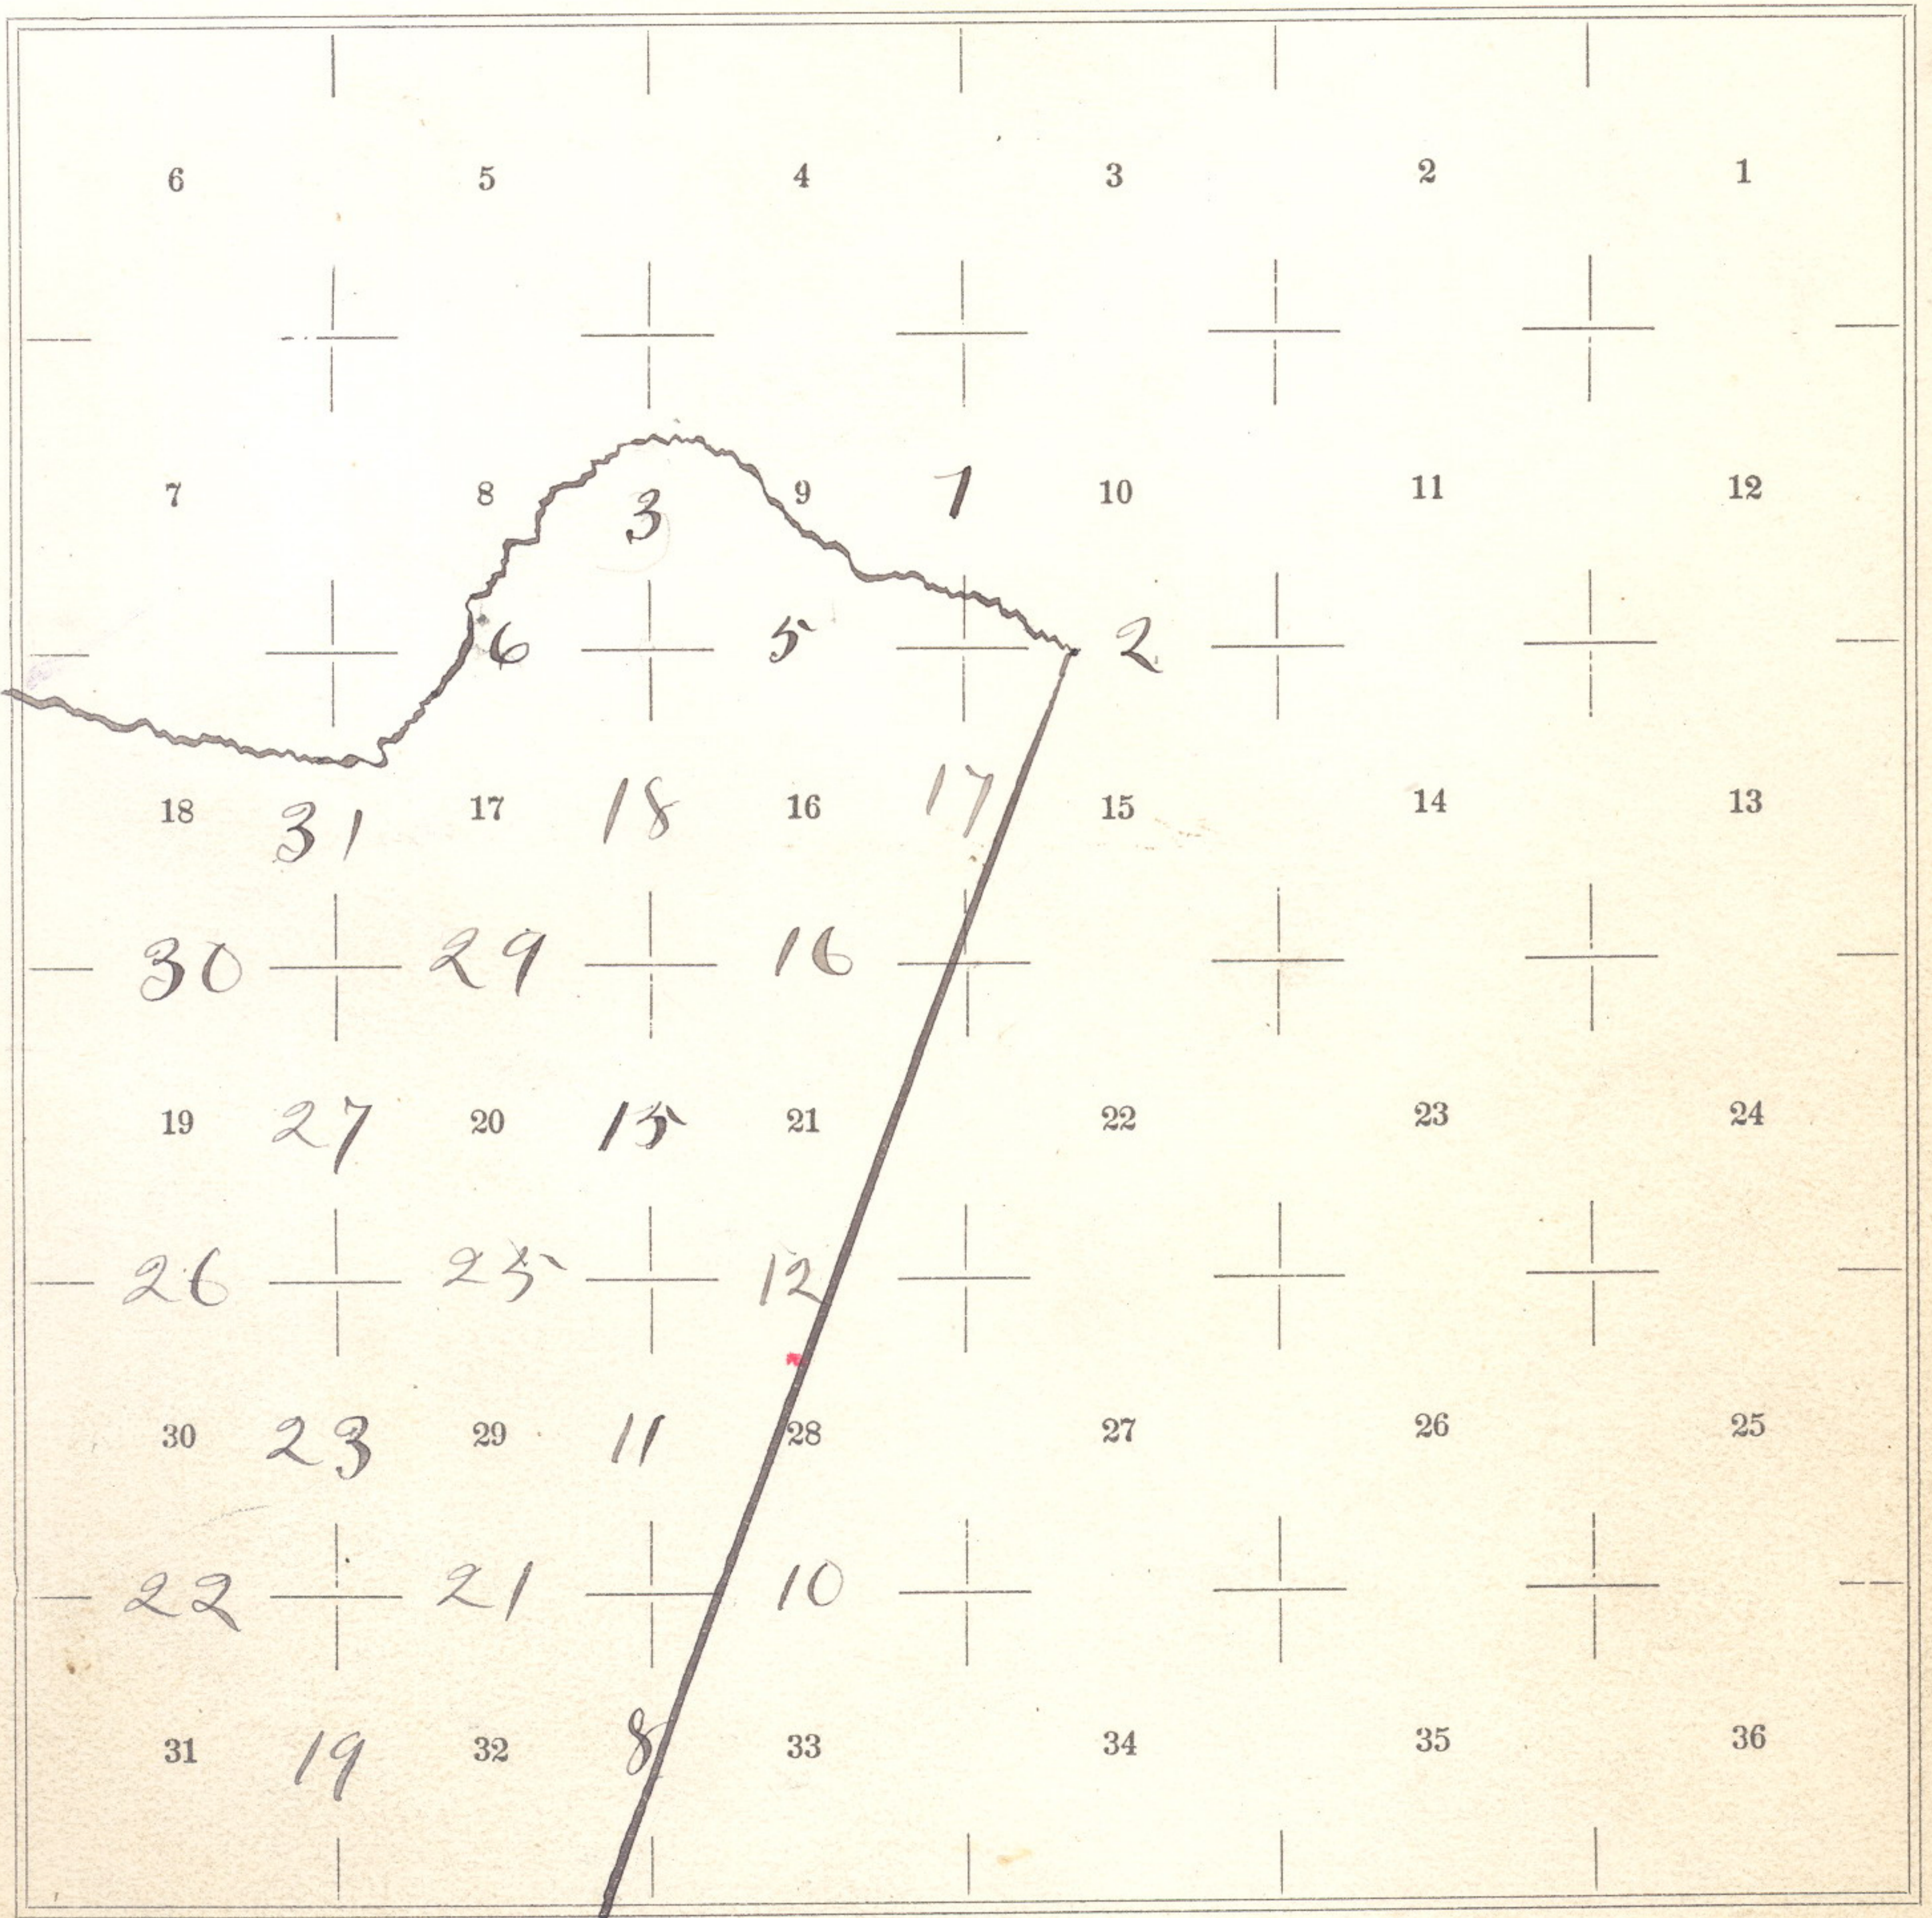

Meanders of _____, Pages _____ to _____

Meanders of _____, Pages _____ to _____

Subdivisions of T. 3 North R. 36 East

Willamette Meridian, Oregon.

(18 01-500)

Commencing at Meander cor to
 fractional sections 9^{and} 10 which
 is a post 4 ft long 4 ins square
 set firmly in the ground marked
 M.C. W.R. on S
 S 10 on E. and S 9 on N faces
 from which

A fir 10 ins. diam, bears N 78° E 29 lks dist.
 marked T 3 N S 10 W.R. M.C. B.D.

A fir 10 ins. diam, bears N 32° W 65 lks dist
 marked N 36 E. S 9 W.R. M.C. B.D.

Thence South on true line

Pa. 19° East

1585 Set basalt. stone 12 x 12 x 10 ins
 8 ins in the ground for cor to
 sec. 9, 10, 15^{and} 16 marked
 with + notches on S and 3 notches
 on E edges, from which

A pine 16 ins diam bears N 53° E 90 lks dist
 marked T 3 N R 36 E S 10 B.D.

A pine 10 ins. diam, bears S 53° E 107 lks. dist.

2

522

Subdivision of T. 3 North R. 96 East
Willamette Meridian, Oregon.

(8093-10 M.)

marked T. 3 N. R. 96 E. S. 15 B. J.

A pine 16 ins. diam. bears S 48° W 219 ft dist
marked T. 3 N. R. 96 E. S. 16 B. J.

A pine 16 ins. diam. bears N 58° W 48 ft dist
marked T. 3 N. R. 96 E. S. 9 B. J.

This cor is in center of wagon road
E. and W.

Land rolling Soil 2nd rate
Dusky Pine and Fir with thick
undergrowth of saw - 15.85 chs.

East on ran bet sec 10^{and 15}
Va 19° East

3034 A point 2.13 chains S of Meander
cor to fractional sec 10^{and 15}
Which is a post 4 ft long 4 ins
square set firmly in the ground
marked W. R. M. Co. N. face
S 10 on N^{and} S 15 on S. face.

From which
A fir 18 ins diam bears N 90° E 53 ft dist.

Subdivisions of T. 3 North R. 36 East.
Willamette Meridian, Oregon.

marked W.R. M.C. T 3 N 5 10 B. I.
A fir 8 ins diam bears S 83° E 53 k dist
marked W.R. M.C. R 36 E 15 B. I.
Thence S 76° 00' W on true line.
As same

2700 Wagon road N. E. and S. W.

30.41 Cor. to secs. 9, 10, 15 and 16

Land rolling Soil 2nd rate
Timber pine and fir and ^{dense} underbrush
of saw, 30, 34 chs.

Beginning at Meander cor.
to fractional secs 8 and 9 which
is a post 4 ft. long 4 ins.
square 24 ins. in the ground
marked W.R. M.C. on S face

From which
A fir 14 ins diam bears N 40° E 48 k dist
marked W.R. M.C. T 3 N 5 9 B. I.
A fir 10 ins diam bears N 77° W. 46 k dist
marked W.R. M.C. R 36 E 15 B. I.

Subdivisions of T. 3 North R. 36 East
 Willamette Meridian, Oregon.

(8093-10 M.)

Iron South on true line between
 9th and 9

Pa. 20° East

1189 Set post 9 ft. long 8 ins square
 24 ins in the ground for 1/4
 sec. cor. marked 1/4 S on

N. face from which

A tamarack 8 ins diam bears S. 60° E

12 lbs dist marked 1/4 S. B. T

A tamarack 8 ins diam bears West

44 lbs dist marked 1/4 S. B. T.

2529 Gulch course N. W. 20

2964 Wagon road N. W.

5189 Set post 4 ft. long 4 ins square
 24 ins in the ground for
 cor to sec 8, 9, 16th and 17 marked

T 8 N S 9 on N. E.

R 36 E S 16 on S. E

S 17 on S. W. 16th and S 8 on N. W.

faces with 4 notches on Sth and
 E. edges. from which

Subdivision of T. 3 North R. 36 East
Willamette Meridian, Oregon.

(M 01-1009)

A tamarack 5 ins diam bears $N 65^{\circ} E$ 7 ft dist
marked T 3 N, R 36 E, S 9 B, F.

A fir 18 ins diam bears $S 40^{\circ} E$ 60 ft dist
marked T 3 N, R 36 E, S 16 B, F.

A tamarack 4 ins diam bears $S 28^{\circ} W$ 89 ft dist
marked T 3 N, ^{R 36 E} S 14 B, F.

A fir 5 ins diam bears $N 38^{\circ} W$ 10 ft dist.
marked ^{T 3 N} R 36 E, S 8 B, F.

Land rolling Soil 2nd rate
Covered with fir, Pine, and dense
underbrush, 51.89 cho.

East on random bet. sec. 9 and 16

On 19° East

4000 Set temporary $\frac{1}{4}$ sec. cor. and at

7914 Intersect Q. bdy 200 ft N of
cor. to sec. 9, 10, 15 and 16

Thence $N 88^{\circ} 34' W$ on true line

On same

2125 Head of canon S.

8900 Wagon road $S 78^{\circ} W$.

Subdivisions of T. 3 North R. 36 East,
Willamette Meridian, Oregon.

(8093-10 M.)

3957 Set post 4 ft long 3 ins square
24 ins in the ground for 1/4
sec cor., marked 1/4 S on N face
from which

A tamarack 4 ins diam bears N 5° E
6 kts dist., marked 1/4 S. B. I.

A tamarack 6 ins diam bears S 85° W,
19 kts dist., marked 1/4 S. B. I.

5450 Wagon road S. N.

6850 Wagon road S.

7914 Cor to secs. 8, 9, 16 and 17

Land rolling Soil 2nd rate
Henry Pine, Tamarack, Red fir with
underbrush of same, 79.14 chs

West on ran bet secs. 8 and 17
Va 19° East

4000 Set temporary 1/4 sec. cor. and at

4145 A point 164 N. of of Meander
cor. to fractional secs. 8 and 17
Thence N 87° 43' East on true

Subdivision of T. 3 North R. 36 East
 Willamette Meridian, Oregon.

line Va same

145 Iron post 3 ft long 3 ins square
 24 ins in the ground for $\frac{1}{4}$ sec.
 cor. marked $\frac{1}{4}$ S on N. face

from which

A fir 7 ins diam. bears S 75° W 50 fts dist
 marked $\frac{1}{4}$ S. P. I.

A fir 7 ins diam. bears N 89° W 50 fts dist
 marked $\frac{1}{4}$ S. P. I.

4145 cor. to sec. 8, 9, 16 and 17

Land rolling Soil 2nd rate
 Heavy Pine fir and tamarack with
 underbrush 4145-cho

Sept. 13th 1887.

Commencing at cor. to sec.
 32 and 33 on S bdy Township
 which is post 4 ft long 4 ins
 square 24 ins in the ground
 marked T 3 N S 33 on N.E.
 R 36 S 32 on N. W. face in
 mound of stone.

Subdivisions of T. 3 North R. 36 East
 Willamette Meridian, Oregon.

(8093-10 M.)

Iron North bet sees 92 and 99

Co 21. East

1250 Top of ridge It + 800

1984 Set post four ft long 4 ins square 24 ins in the ground for C.C. to sees. 92 and 99 marked W.R. C.C. on N. S 32 on N and 99 N. R. 36 E. S 93 on E. faces and dug ^{posts} 18 x 18 x 12 ins N. E. and W. of cor 5 1/2 ft dia. and raised mound of stone and earth 2 ft high 4 1/2 ft base over it from which the 37th mile cor. on W.R. bdy bears S 20° W 120 lbs dist. Dredged

4000 Set post 3 ft long 3 ins square 24 ins in the ground for 1/4 sec. cor. marked 1/4 S. on N. face from which a pin 6 ins diam. bears N. 30° E. 110 dist.

Subdivision of T. 3 North R. 36 East

Willamette Meridian, Oregon.

(16 01-500)

marked $\frac{1}{4}$ S. B. T.

A pine is ins. diam. bears $N 15^{\circ} W 10$ dist

marked $\frac{1}{4}$ E. R. T.

4200 Gulch W. - 950

5500 Sum. ridge W. + 400

6200 Canyon W. - 350

7400 Top of ridge W. + 900

8000 Set basalt stone $10 \times 8 \times 4$ ins
 6 ins in the ground for cov
 to sec. 28, 29, 32 and 33 marked
 with notch on S. and 4 notches

on East edges and raised
 mound of stone 2 ft high
 $4 \frac{1}{2}$ ft base over it

Land very rough and mountainous
 8000 chs Soil 4th rate and rocky

Scattering pine and fir timber
 and Underbrush of same +

530

Subdivisions of T. 30 North R. 36 East

Willamette Meridian, Oregon.

(8093-10 M.)

East on ran. bet sees 28th & 33rd

on 28th East

2121

a point 109 lbs S of Closing
cor set by Deputy Surveyor
Pershun which is a stone
14 x 12 x 10 in. ^{set} firmly in the
ground marked W.R.C.C. and
mound of stone around it

Thence S 87° 04' W on true line
Va sam

Descend

2121

Cor to sees. 28, 29, 32nd & 33

Land steep mountain side

21.21 chs. Grass field

Soil 4th note Redrock

Subdivision of T. 3 North R. 36 East
Willamette Meridian, Oregon.

North bet sees 28^{and 29}
Va 20 East

650 Summit of ridge N. +250

1985 Canon N. -250

3150 Summit ridge, N. +250

4000 Set post 4 ft long 4 ins square
24 ins in the ground for
1/4 sec. cor. marked 1/4 S on N face
from which

A pin 14 ins diam bears N. 20° E 166 lbs dist
marked 1/4 S. B. T.

A pin 18 ins diam bears N. 30° W. 200 lbs dist
marked 1/4 S. B. T.

6450 Umatilla river 100 yds runs S. W. -600

6750 Wagon road S. W.

7025 Spring branch 10 ft wide S to E
ascend

8000 Set basalt stone 10 x 4 x 6 ins
in the ground for cor. to sees.
20, 21, 28^{and 29}. marked with
2 notches on S and 4 notches on

532

Subdivision of T. 3 North R. 36 East

Willamette Meridian, Oregon.

(8093-10 M.)

E. edges and raised mound
 of stone over it + 600.
 80.00 chs
 sand mountains, S.
 of river Soil 3rd rate
 Timber Pine and fir on
 N sides of hills and along
 river, Grass poor.

East on raw bet sees 21st and 28th.
 Pa 21st East

4000 Set temporary 1/4 sec. cor. and at
 5211 A point 138 kts S of Pubbins
 C.C. which is a post 4 ft. long
 24 ins in the ground marked
 C.C. on N. face.
 S 21 on N and S 28 on S face
 from which.

A pine 10 ins diam bears South 1/2 kts
 A fir 8 ins " " N 48° E 64 kts dist.
 marks are illegible This cor.
 is 1.12 kts. E. of W.R. bdy.

Subdivisions of T. 3 North R. 30 East
Willamette Meridian, Oregon.

Thence S 48° 29' N on true line
On same

112 A fir which I mark W.R.C.C.
on N. S 21 T 3 N on N^{and}
S 28 R 36 E on S face from which
A fir 4 ins diam. bears N 20° E 10 kts dist.
marked W.R.C.C. T. 3 N. R. 36 E. S. 21 B. T.
A pine 7 ins diam. bears, S 28° E 35 kts dist
marked W.R.C.C. T. 3 N. R. 36 E. S 28 B. T.

1211 Set post 3 ft long 3 ins square
24 ins in the ground marked
4 S on N face for 1/4 sec. cor.
from which
A pine 18 ins diam. bears, S 45° E 15 kts dist
marked 4 S. B. T.
A pine 12 ins diam bears N 20 W 15 kts dist
marked 4 S. B. T.

1911 Canon N. W. 250
2661 Umatilla river 100 kts wide S. W.
3581 Wagon road N. E. ^{and} S. W.
3800 Lower river bottom

14

534

Subdivisions of T. 30 North R. 36 East

Willamette Meridian, Oregon.

(8093-10 M.)

4961	Summit ridge S.W. + 100
5211	Sec cor to 20, 21, 28 ^{and} 29. Land mountainous. 50.99 chs. Soil granite Good pine and fir timber

Subdivision of T. 3 North R. 96 East
 Willamette Meridian, Oregon.

North per sees 20^{and} 21
 Va 20° East

Ascend mountain

2800 Head of canon
 4000 Set post 4 ft long 4 ins square
 2 1/2 ins in the ground for
 1/4 sec cor dug pits 18 x 18 x 12 ins
 N and S of post 5 1/2 ft dist.
 And raised mound of earth
 1 1/2 ft high 3 1/2 ft base over it
 marked post 4 ft on N. face

4700 Canon S. E. - 100

5950 Summit of ridge S. E. + 200

8000 Set basalt stone 12 x 10 x 6 ins
 8 ins in the ground for cor. to sees
 16, 17, 20 and 21 and raised mound + 15
 of stone over it

Land mountainous 80 chs

Soil 4th rate red rocky
 Good bunch grass

Subdivisions of T. 9 North R. 96 East

Willamette Meridian, Oregon.

(8093-10 M.)

East on ran bet sec 16 and 21
Ca 20° East

4000

8201

Set temporary 1/4 sec. cor. and at
a point 44 links S of cor
to sec. 15, 16, 21 and 22
which is a stone 14x10x8 ins
on E. side of ridge with +800
mound of stone around
it. Thence

S 89° 41' It on true line

Ca 21° East

279

Chasing cor set by Perkin
which is stone 15x12x10 ins set
firmly in the ground marked
with (X) on top and mound of
stone around it

1222

Canon S. W.

-900

2622

Summit of ridge

+100

4100

Set basalt stone 16x16x8 ins
1/4 ins in the ground for 1/4 sec.
cor. marked 1/4 on N. face.

Subdivisions of T. 3 North R. 36 East
Willamette Meridian, Oregon.

and raised mound of stone over it.

- 42.00 Canyon S. - 200
- 54.20 Road on Summit S. + 180
- 63.20 Canyon S.E. - 200
- 79.20 Summit of ridge
- 82.01 Cor to Secs 16-17-20 & 21

Land rough & mountainous 79.22 chs
Soil 3^d rate. Good bunch grass.

From the closing cor. on N. body
between Secs 15 and 16. 8.04 chs
North of cor to Secs 15-16-20 & 22
which is a stand 18 x 12 x 5 ins
set in stone mound Iron.

North bet. Secs. 15 & 16. Var 21° E.
on random.

- 31.96 Set temporary 1/4 Sec. corner
- 68.94 Intersect 10.46 chs E. of corner
to Secs 9-10-15 and 16.

Thence S. 8° 40' E. on true line
between Secs 15 & 16. Var 19° E.

- 12.18 Canyon S.W. - 150
- 30.34 Summit of ridge + 150

Subdivision of T. 3 North R. 36 East
Willamette Meridian, Oregon.

(8093-10 M.)

- 37.41 Set basalt stone 12 x 10 x 10 ins
8 ins in the ground for 1/4 Sec
corner marked 1/4 on W. face
and raised around of stone over it -90
- 46.53 Canyon S.W. -150
- 60.74 Summit of ridge N. +200
- 69.74 To U.R. closing corner
Land mountainous 69.74 chs
Soil 3^d rate. Some timber in canyon
Sept 14th 1887
- North on random bet. Secs 16 & 17
Var 20° East
- 40.00 Set temporary 1/4 Sec. corner.
- 79.00 Intersect E. & W line 8.57. chains
Cost of corner to Secs 8-9-16-17
Thence S. 6° 12' E. on true line
Var 19° East
- 11.32 Wagon road E. & W.
- 39.23 Set post 4 ft. long 4 ins square
24 ins in the ground for 1/4
Sec corner.

Subdivisions of T. 3 North R. 36 East
Willamette Meridian, Oregon.

(M 01-059)

marked 1/4 S. on N. face dug
pits 18x18x12 ins N. and S. of
post 5 1/2 ft. dist. and raised mound
of earth 1 1/2 ft. high 9 1/2 ft. base over it

5030 Leave timber and descend

6990 Wagon road E. and N.

7947 to cor. to sec 16, 17, 20 and 21

Land broken and mountainous 79.47 chs.

Soil good rate

Timber pine and fir and underbrush,
Good grassy

North Sec 20 31 and 32

1/4 13° E

1000 Meacham Creek N 20° East - 50

1900 Same " N 20 W - 50

2950 Same " N 45 E - 30

4000 Set post 3 ft. long 3 ins square

Subdivisions of T. 3 North R. 36 East
Willamette Meridian, Oregon.

(8093-10 M.)

24 ins in the ground for
1/4 sec. cor. marked 1/4 S. D.
on N. face. From which,
A fir 36 ins S 70° E dist 25 lks
marked 1/4 S. B. P.
A pine 30 ins in diam to N 85° W dist
20 lks. marked 1/4 S. B. P.

- 4450 Maeham Gut 30 lks N. W.
- 5750 Same .. 30 lks N. E.
- 6150 Same .. 30 lks N. W.

7650 House in small inclosure

8000 Set post 4 ft long 4 ins square
24 ins in the ground for cor
to secs 29, 30, 31 and 32 marked
T 3 N. S 29 on N. E.
R 36 E. S 32 on S. E.
S 31 on S. W. and S 30 on N. W.
faces, with 1 notch on S. end
5 notches on E. edge from which.
A pine 16 ins diam bears S 25° W 54 lks dist
marked T 3 N, R 36 E, S 31 B. P.

Subdivisions of T. 3 North R. 36 East
Willamette Meridian, Oregon.

A birch 5 ins diam bears N 75° W. 38 k dist
marked D 30 N, R 36 E, S 30 B. T.
No other trees in limits and raised
mound of stone over it
Land mostly creek bottom
Soil 2nd rate, gravelly
dense brush - Pine & Balsam Timber 80.00 cho

East on ran. bet sees, 29th & 32nd
Va 20 1/4° East

4000 Set trap 1/4 sec. cor. and at
4000 Intersect N. and S. line 20 k
D. of of cor. to sees, 28, 29, 32 & 33.
Thence S 89° 51' W. on true line
Va 20° East

- 1190 Canon N. H. - 100
- 1930 Summit of ridge N. H. + 200
- 3900 Spring bank in gulch - 75
- 4000 Set post 3 ft. long pins square
24 ins. in the ground for 1/4
sec. cor. marked 1/4 S on N face

542

Subdivisions of T. 3 North, R. 36 East
Willamette Meridian, Oregon.

(8093-10 M.)

from which
A tamarack *Pseudotsuga* bears S 45° E 60' dist
marked 1/4 S.B.S.
A fir *Abies* bears N 90° W 50' dist
marked 1/4 S.B.S.

5600 Snow bed spring branch S.W.
6400 Summit of ridge S.W. + 75
Descent

7000 Cor to sees. 29, 30, 31 and 32.
Land broken and mountainous rocks,
covered with pine and fir
timber and brush
Soil good rate & rocky.

West on ran bet sees. 30 and 31
Va. 20 1/4 East.
4000 Set temporary 1/4 sec cor. and an
7960 Intersect W. bdy 80 N. of
cor. to sees. 25 and 26 and 30 and 31
Thence N 89° 26' East on true
line Va. 21° East.
1295 Snow S. -50

Subdivisions of T. 3 North R. 36 East

Willamette Meridian, Oregon.

(M 01-500)

2760 Low. S. - 100

3800 Umatilla river S. R. 100 lks wide

3960 Set basalt stone 12 x 10 x 8 ins
8 ins in the ground for 1/4 sec
cor. marked 1/4 on N. face. And
raised mound of stone 1 1/2 ft.
high 9 1/2 ft. base over it.

4710 Umatilla river N. R. 100 lks wide - 100

5685 Lamin S. R. 80 lks ..

7960 The cor to Secs 29-30-31+32.

Land mostly along bank
of river, Heavy underbrush 7960th
Lamin pine and Balsam timber
Soil rocky 4th water.

Sept. 13th 1887.

North bet sees 29 and 30
Pa 20 1/4 East.

1750 Umatilla river 100 lks wide. R.

2100 Acend steep mountain side

4000 Set basalt stone 9 x 5 x 7 ins
6 ins in the ground
for 1/4 sec. cor. marked 1/4

24
544

Subdivisions of T. 3 North R. 36 East

Willamette Meridian, Oregon.

(8093-10 M.)

on west face, and raised mound
of stone over it.

Gradually ascend steep side
of ridge

7000 Top of ridge +600

2000 Top post 4 ft. long, 4 ins
square 24 ins in the ground.
for cor to Decs 19, 20, 29 and 30
marked

T. 3 N. S 20 on N. E

R. 36 E. S 29 on S. E

S 30 on S. W. and S 19 on N. W.
faces. with 2 notches on S.
and 5 notches on E edges.

From which

A fir 8 ins diam, bears N. 40° E 85 the dist
marked T. 3 N. R. 36 E. S. 20. B. T.

A pine 96 ins diam, bears S. 47° E 10 the dist
marked T. 3 N. R. 36 E. S. 29. B. T.

A pine 90 ins diam, bears S. 70° W. 90 the
marked, T. 3 N. R. 36 E. S. 30. B. T.

Subdivisions of T. 3 North R. 96 East
Willamette Meridian, Oregon.

A pine 8 ins. diam, bears N. 55° W. 66 knots,
marked T 3 N 90 E. & 19 B. A.
Land broken & mountainous 80. chs
Soil good water

Timber along river bottom

East on ran bet secs 20 and 29
On 19° East.

4000 Set temporary 1/4 sec. cor.

2000 Intersect N. S. line 10 kts S of cor
to secs. 20, 21, 28 and 29 Thence
S 89° 56' W on true line

On 20° East.

575 Gully S. W. - 25

1800 Spring branch S. E.

2400 Summit of ridge + 400

2885 Canon S. E. - 400

4000 Set basalt stone 12 x 8 x 6 ins 8 ins
in the ground for 1/4 sec. cor, marked
1/4 on N. face and raised mound of
stone 1/2 ft high 3 1/2 ft base over it

Subdivision of T. 3 North R. 96 East
Willamette Meridian, Oregon.

(8093-10 M.)

4900 Summit ridge S +250

5985 Gulch S. -200

6800 Summit of ridge S +300

7700 Spring branch S.E.

8000 Cor to sees 19, 20, 29 and 30
Land rough and mountainous 80 chs
Soil good water and rocky
No timber

West on ran bet sees 19 and 30
On 19° East

4000 Set temporary 1/4 sec. cor. and on

7920 Intersect N. body Township at
cor to sees. 19 and 30, 24 and 25.

Thence East on true line
On same

3950 Canon S. -150

3920 Set basalt stone 12x10x8 ins
lines in the ground for 1/4 sec. cor.
marked 1/4 on N. face and raised
mound of stone over it.

Subdivisions of T. 3 North R. 96 East

Willamette Meridian, Oregon.

4500	Summit of ridge D	+ 50
5200	Canyon D.	- 150
6000	Summit ridge	+ 150

7920 Cor to sec 19, 20, 29 and 30
 Land mountainous 79.20 chs
 Soil good rate and rocky
 Good bunch grass.

North bet sec. 19 and 20
 Va 19° East

175	Canyon East	- 200
1050	Summit of ridge E	+ 200
1990	Canyon E.	- 150
4000	Set basalt stone for 1/4 sec	+ 500

cor. 18 x 10 x 8 ins 12 ins in the
 ground marked 1/4 on N. face
 and raised mound of stone
 over it

4700	Quito timber	
5920	Draw H.	- 20
8000	Set post 4 ft long 4 ins square x	

548

Subdivisions of T. 3 North R. 36 East
 Willamette Meridian, Oregon.

(8093-10 M.)

24 ins in the ground for cor.
 to sees. 17, 18, 19 and 20 marked
 D. N. R. 36 E. S 17 on N. E.
 R 36 E S 20 on S. E.
 S 19 on S. W. and S 18 on N. W. faces
 with 2 notches on S. and 5 notches
 on E. edges. From which
 A pine 20 ins diam bears S 5° W 76 lbs
 marked D. N. R. 36 E. S 19 B. T.
 A pine 96 ins diam bears N 80° W 140 lbs dist
 marked D. N. R. 36 E. S 18 B. T.
 A pine 16 ins diam bears N 60° E 127 lbs dist
 marked D. N. R. 36 E. S 17 B. T.
 Land rough and mountainous 80 ch.
 Soil good rate
 Good grass
 Pine timber on
 N. 1/2 of line

Subdivision of T. 3 North R. 36 East
Willamette Meridian, Oregon.

East on ran^{dom} bet sees 17^{and} 20
Va 22 1/2 East

4000 Set temporary 1/4 sec. cor. ^{and on}

7980 Intersect N. and S. line 95. ft

N of cor to sees 16, 17, 20^{and} 21

Thence N 89° 45' W on true
line Va 20° East

250 Summit of ridge S + 40

1280 Canyon S. - 250

1980 Summit ridge + 50

2675 Canyon S. - 100

3990 Set basalt stone 14 x 12 x 10 ins
8 ins in the ground for 1/4 sec.
cor. marked 1/4 on N. face.

and raised mound of stone
1 1/2 ft high 9 1/2 ft base over it

4400 Summit hill & enter timber + 75

7980 Cor to sees 17, 18, 19^{and} 20

Land ~~mountainous~~ 79.80 obs

Soil good rate & rocky
Scattering pines on last 1/2 mile

550

Subdivision of T. 3 North R. 36 East

Willamette Meridian, Oregon.

(8093-10 M.)

- West on ran. bet sees. 18^{and} 19
 4000 Set temporary $\frac{1}{4}$ sec. cor. ^{and at}
 7925 Intersect N. bdy Township 75 ft.
 S. of cor to sees 18, 19, 18^{and} 24
 Thence S 89° 28' E. on true line.
 Va 22 $\frac{1}{2}$ ° East
- 3925 Set basalt stone 12x10x8 ins 8 ins in the
 ground for $\frac{1}{4}$ sec. cor. marked
 $\frac{1}{4}$ S. on N. face ^{and} raised mound
 of stone 1 $\frac{1}{2}$ ft. high 3 $\frac{1}{2}$ ft base over
 it
- 5820 Wagon road course N. E.
 6400 Gulch course S. W. -15'
 7925 Cor. to sees 17, 18, 19. ^{and} 20,
 Land High. ^{and} rolling
 Soil 1st rate
^{and} fine bunch grass
 Scattering timber Pine & fir,

Subdivisions of T. 3 North R. 96 East 551
Willamette Meridian, Oregon.

North on ran. bet sees 17 and 18
Ca 22 1/2 East

4000 For temporary 1/4 sec. cor. And at
4972 A point 9.00 chains E of Meander
cor to sees 17 & 18 which is an
old post rotted down. And as
the exact locality of this cor.
can only be ascertained in one
way I go to cor to sees.
7, 8, 17 and 18 which is post

from which
A pin 90 ins diam bears N 45° E 5 the dist
A pin 24 ins diam bears S 96° W 12 the dist
marks are illegible. I run

South on true line bet sees
17 and 18 Ca 21 East

2771 For old post 24 ins in the ground
And also a stone 16x16x16 ins 10 ins
in the ground for Meander cor
to fractional sees. 17 and 18 marked
W. R. M. C. on S face And raised

Subdivisions of T. 3 North R. 36 East
Willamette Meridian, Oregon.

(8093-10 M.)

mound of stone around it
Thence S 10° 21' East on true
line

3.30 Summit of point N.W. +60

5.80 Gulch N.W. -90

9.90 Set post 3 ft. long 9 ins square
12 ins in the ground for 1/4 sec. con
marked 1/4 D on N. face from which
A fir 6 ins diam bears N 45° W 8 1/2 dist
marked 1/4 S. B. T.

A Tamarack 18 ins diam, bears S 65° E 7 1/2 dist
marked 1/4 S. B. T.

35.00 Wagon road Q. & N.W.

50.54 Cor to sec. 17, 18, 19 and 20

Land rolling
Soil good rate

Heavy
Timber and undergrowth pine for
5004 chs Sept. 15th 1887.

General Description

This Township is high mountainous
and broken The Willamette River runs
through its South half from E. to W.
& also Meacham creek empties into
the Willamette from the South in
this Township in valleys or canyons.

From 2 to 3000 ft deep
the procedure good lumber
ground with the water where
the pine timber is cutting
some better timber on the
bottom soil mostly.

of T. R.

Willamette Meridian, Oregon.

* In accordance with
the requirements of the manual
of surveys we have carefully
tested the adjustment of our
instruments by taking the lati-
tude daily weather permitting
during the progress of the sur-
veys represented by the fore-
going field notes and in all cases
the instruments were found to
be in correct adjustment.

James P. Currier
James E. Holand
U. S. Deputy Surveyors

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by Gas. P. Currin

and Jas. Holand, U. S. Deputy Surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of the

574 Subdivisional lines of Townships 2nd & 3rd
North Range 36 East Willamette Meridian, Oregon, showing the respective capacities in which they acted:

-, Compassman.
- J. S. Medley....., Chainman.
- W. H. Medley....., Chainman.
- Frank Belshaw....., Chainman.
- Guy Davis....., Chainman.
- B. B. Crowner....., Axman.
- H. Beach....., Axman.
- Frank Koons....., Flagman.

FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted Gas. P. Currin

and Jas. Holand, U. S. Deputy Surveyor, in surveying all those parts or portions of the

Subdivisional lines of Townships 2nd & 3rd
North Range 36 East Willamette Meridian, Oregon, as represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

-, Compassman.
- J. S. Medley....., Chainman.
- W. H. Medley....., Chainman.
- Frank Belshaw....., Chainman.
- Guy Davis....., Chainman.
- B. B. Crowner....., Axman.
- H. Beach....., Axman.
-, Flagman.

Subscribed and sworn to before me this 15th day of

Sept., 1887.

[SEAL.]

James P. Currin
U. S. Deputy Surveyor

FINAL OATH OF DEPUTY SURVEYOR.

I, Mr. Jas. P. Currier & Jas. Holand, United States Deputy Surveyors do solemnly swear that in pursuance of instructions

received from Douglas H. Taylor, U. S. Surveyor General for Oregon, bearing date of the 13th

day of May, 1887. I have well, faithfully, and truly, in ~~my~~ ^{our} own proper persons, and in strict conformity with the

instructions furnished by the U. S. Surveyor General for Oregon, the Surveying Manual, and the laws of the United States, surveying all

those parts or portions of Townships 2nd & 3rd North R. 96 East

Willamette Meridian, in the State of Oregon, as are represented in the foregoing field notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions, the special written instructions of the U. S. Surveyor General for Oregon, and in the specific manner described in the field notes, and that the foregoing are the *true* field notes of such survey, and should any fraud be detected ~~I~~ ^{we} will suffer the penalty of perjury under the provisions of an act of Congress approved August 8, 1846.

James P. Currier & James E. Holand U. S. Deputy Surveyors,

Subscribed and sworn to before me this Fifteenth day of February, 1888

W. Woodwell
Notary Public
for Oregon

576

Office of U. S. Surveyor General,

Portland, Oregon, July 26th, 1888.

The ^{following} ~~following~~ Field Notes of the Survey of the

Subdivisional lines of Twp.

3. North Range 36. East

Will. Mer Oregon

executed by James P. Currier + James E. Skoland

^{Special Joint}
under ~~his~~ Contract No. _____, dated May

17th, 1887, having been critically examined,
the necessary corrections and explanations made, the
said Field Notes and the survey they describe, are
hereby approved.

Douglas W. Taylor.

Surveyor General.