

OREGON CORNER RESTORATION FORM

COUNTY: Umatilla DATE: 09/19/13

CORNER DESIGNATION: 3N32, E19, The North One-Quarter Corner of Section 11.

PREVIOUS RENEWALS/SURVEYS ETC.: Corner originally established by David Thompson, under GLO Contract 106, dated August 1864, notes state: Set post for 1/4 Sec. corner in mound of Earth with charred stake, pits, trench &c as per instructions.

MONUMENT AND ACCESSORIES FOUND: None.

MONUMENT MARKING DETAIL:

T4N R32E
1 S2
4 S11
T3N
2013
PLS 54657

MONUMENT SET: Held a four way field berm intersection as best remaining evidence of the original corner location and set a 2 3/8" brass cap on a 1 1/4" x 30" galvanized iron pipe with top 20" below ground level, marked as shown in "Monument Marking Detail", from which:
A silver deep-1 magnet, 20" in the ground, bears North 42° East, 28.0 feet.
A pink deep-1 magnet, 20" in the ground, bears South 46 1/2° East, 30.5 feet.
A blue deep-1 magnet, 20" in the ground, bears South 42 1/2° West, 33.7 feet.
An orange deep-1 magnet, 20" in the ground, bears North 58 1/2° West, 38.1 feet.
Buried bearing object tags with magnets and set steel fence post with witness post sign 1.0 feet West of monument.

LOCATION AND COMMENTS: Corner is at a four way field berm intersection. Berms extend North, South, East and West.

OREGON STATE PLANE COORDINATE, North Zone, NAD 83(91), International Feet:

N= 768387.58'
E= 8641925.68'


FIRM: Wells Surveying
P.O. Box 1696
Pendleton, OR 97801

COMPASS DECLINATION: 18° East

Surveyor's Seal

Witnesses: Jason Wells, PLS
Dean Roy

\3N32E19

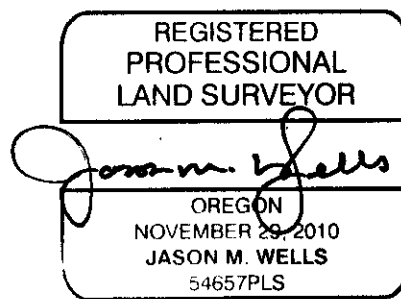

RENEWS: 6-30-14