

OREGON CORNER RESTORATION FORM

COUNTY: Umatilla DATE: 08/23/13

CORNER DESIGNATION: 3N32, J09, The Northwest Corner of Section 16.

PREVIOUS RENEWALS/SURVEYS ETC.: Corner originally established by David Chaplin, under Contract 107, dated September 1864, notes state: Set post for corner to secs 8, 9, 16 & 17 in mound of Earth with charred stake pits & c as per instructions.

MONUMENT AND ACCESSORIES FOUND: None.

MONUMENT MARKING DETAIL:

T3N R32E
S8 | S9
S17 | S16
2013
PLS 54657

MONUMENT SET: There are no features at the corner point. Reestablished corner position by double proportion measurement from corner position ½ mile North, South, East and West using the Chaplin record. At the reestablished corner position, set a 2 3/8" brass cap on a 1 1/4" x 30" galvanized iron pipe with top 20" below ground level in farmed field stamped as shown in "Monument Marking Detail", from which:

A silver deep-1 magnet, buried 20" in the ground, bears North 36° East, 28.0 feet.
A pink deep-1 magnet, buried 20" in the ground, bears South 44° East, 35.9 feet.
A blue deep-1 magnet, buried 20" in the ground, bears South 35° West, 35.0 feet.
An orange deep-1 magnet, buried 20" in the ground, bears North 66° West, 25.8 feet.
Buried bearing object tags with all magnets.

LOCATION AND COMMENTS: Corner falls in a farmed field with no features.

OREGON STATE PLANE COORDINATE, North Zone, NAD 83(91), International Feet:

N= 762849.02'
E= 8628804.28'


FIRM: Wells Surveying
P.O. Box 1696
Pendleton, OR 97801

COMPASS DECLINATION: 18° East

Surveyor's Seal

Witnesses: Jason Wells, PLS
Dean Roy

\3N32J09

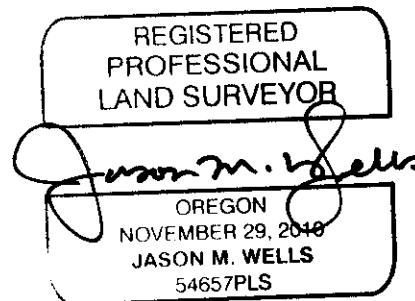

RENEWS: 6-30-14