

OREGON CORNER RESTORATION FORM

Section: 20, 21, 28, 29 Township: 3N Range: 33E
County: Umatilla Date: 3/4/2011

Corner Designation: 3N33R09 (Amended 3/12/2012)

Section corner common to Sections 20, 21, 28, 29, T3NR33E.

<u> </u> X	Condition Report Only
<u> </u>	Not Found
<u> </u>	Remonumented
<u> </u>	Unrecorded
<u> </u>	Surveyed In
<u> </u>	Referenced Out


Previous Renewals / Surveys, etc.

Originally surveyed by Chaplin in 1864. He set a 20" x 10" x 10" stone to mark the corner.
In 1940 BPA surveyors accepted a fence corner with fences running South and West as the corner in the survey for BPA's Pendleton - Walla Walla transmission line.
In 2007 Wells set a 5/8" iron rebar with a 2" aluminum cap with a small mound of stone.


Monuments and Accessories Found: (Condition and Source):

- A 2" aluminum cap.
- A 5/8" iron rebar w/RPC #1106 lies N 89° 30' W, 76.5'.
- A 5/8" iron rebar w/RPC #1106 lies N 30° W, 64.7'.
- A 5/8" iron rebar w/RPC #1106 lies N 24° W, 24.0'.
- A 5/8" iron rebar w/RPC #1106 lies S 87° E, 22.5'.

Diagram



Sketch

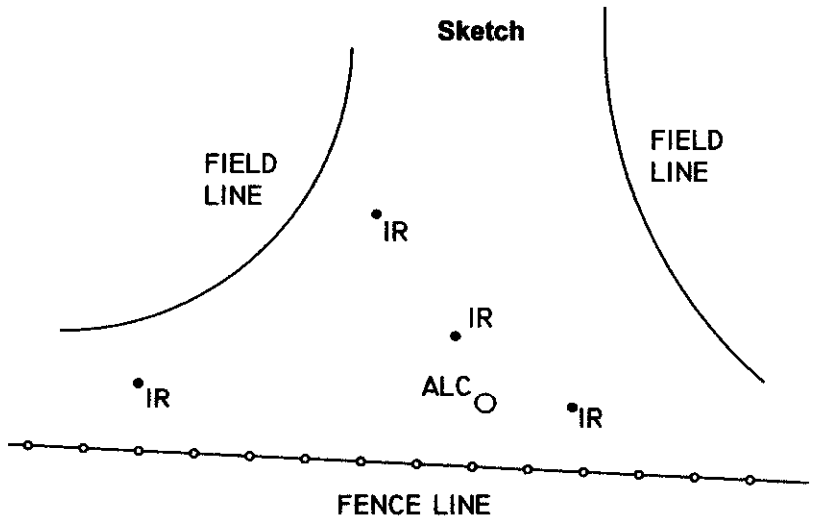

NAD 83/91
OREGON STATE PLANE NORTH
INTERNATIONAL FEET

N752932.08
E8660721.89

Monument(s) Set (Procedures and Description):

None.

References Set:

None.

Location and Comments:

The corner is located at the top of a small ravine 0.8 miles North East of the intersection of Myrick Rd. and Adams Rd.

Compass Declination

17° E

Surveyors Seal

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. English
OREGON
JANUARY 11, 2005
ROBERT DOUGLAS ENGLISH
43406LS

RENEWAL DATE: 12/31/13

RECEIVED BY:

Firm / Agency

Date: 7/10/2012
Rec'd By: S. Pres
No. 12-094-C

Survey One, LLC.
P.O. Box 382
Pendleton, OR 97801
(541) 276-2055