

E
4-679
(April 1933)

FIELD NOTES

OF THE SURVEY OF THE

RETRACEMENT AND DEPENDENT RESURVEY OF THE OREGON AND WASHINGTON

STATE BOUNDARY FROM 51 MILE 48 CHAIN MONUMENT TO 46 MILE

MONUMENT, INDEPENDENT RESURVEY OF THE SOUTH BOUNDARY,

DEPENDENT RESURVEY OF THE WEST BOUNDARY,

and the

SUBDIVISIONAL LINES OF TOWNSHIP 6 NORTH, RANGE 39 EAST.

Of the WILLAMETTE Meridian,

In the State of OREGON

EXECUTED BY

OTIS O. GOULD

U. S. TRANSITMAN

Under special instructions dated April 11, 19 29, which provided

for the surveys included under Group No. 135, bearing the approval of the

Commissioner of the General Land Office under date of May 13, 1929


and assignment instructions dated May 19, 19 32.

Survey commenced Aug. 1, 19 32.

Survey completed Sept. 13, 19 32.

INDEX DIAGRAM.

Township 6 North, Range 39 East.

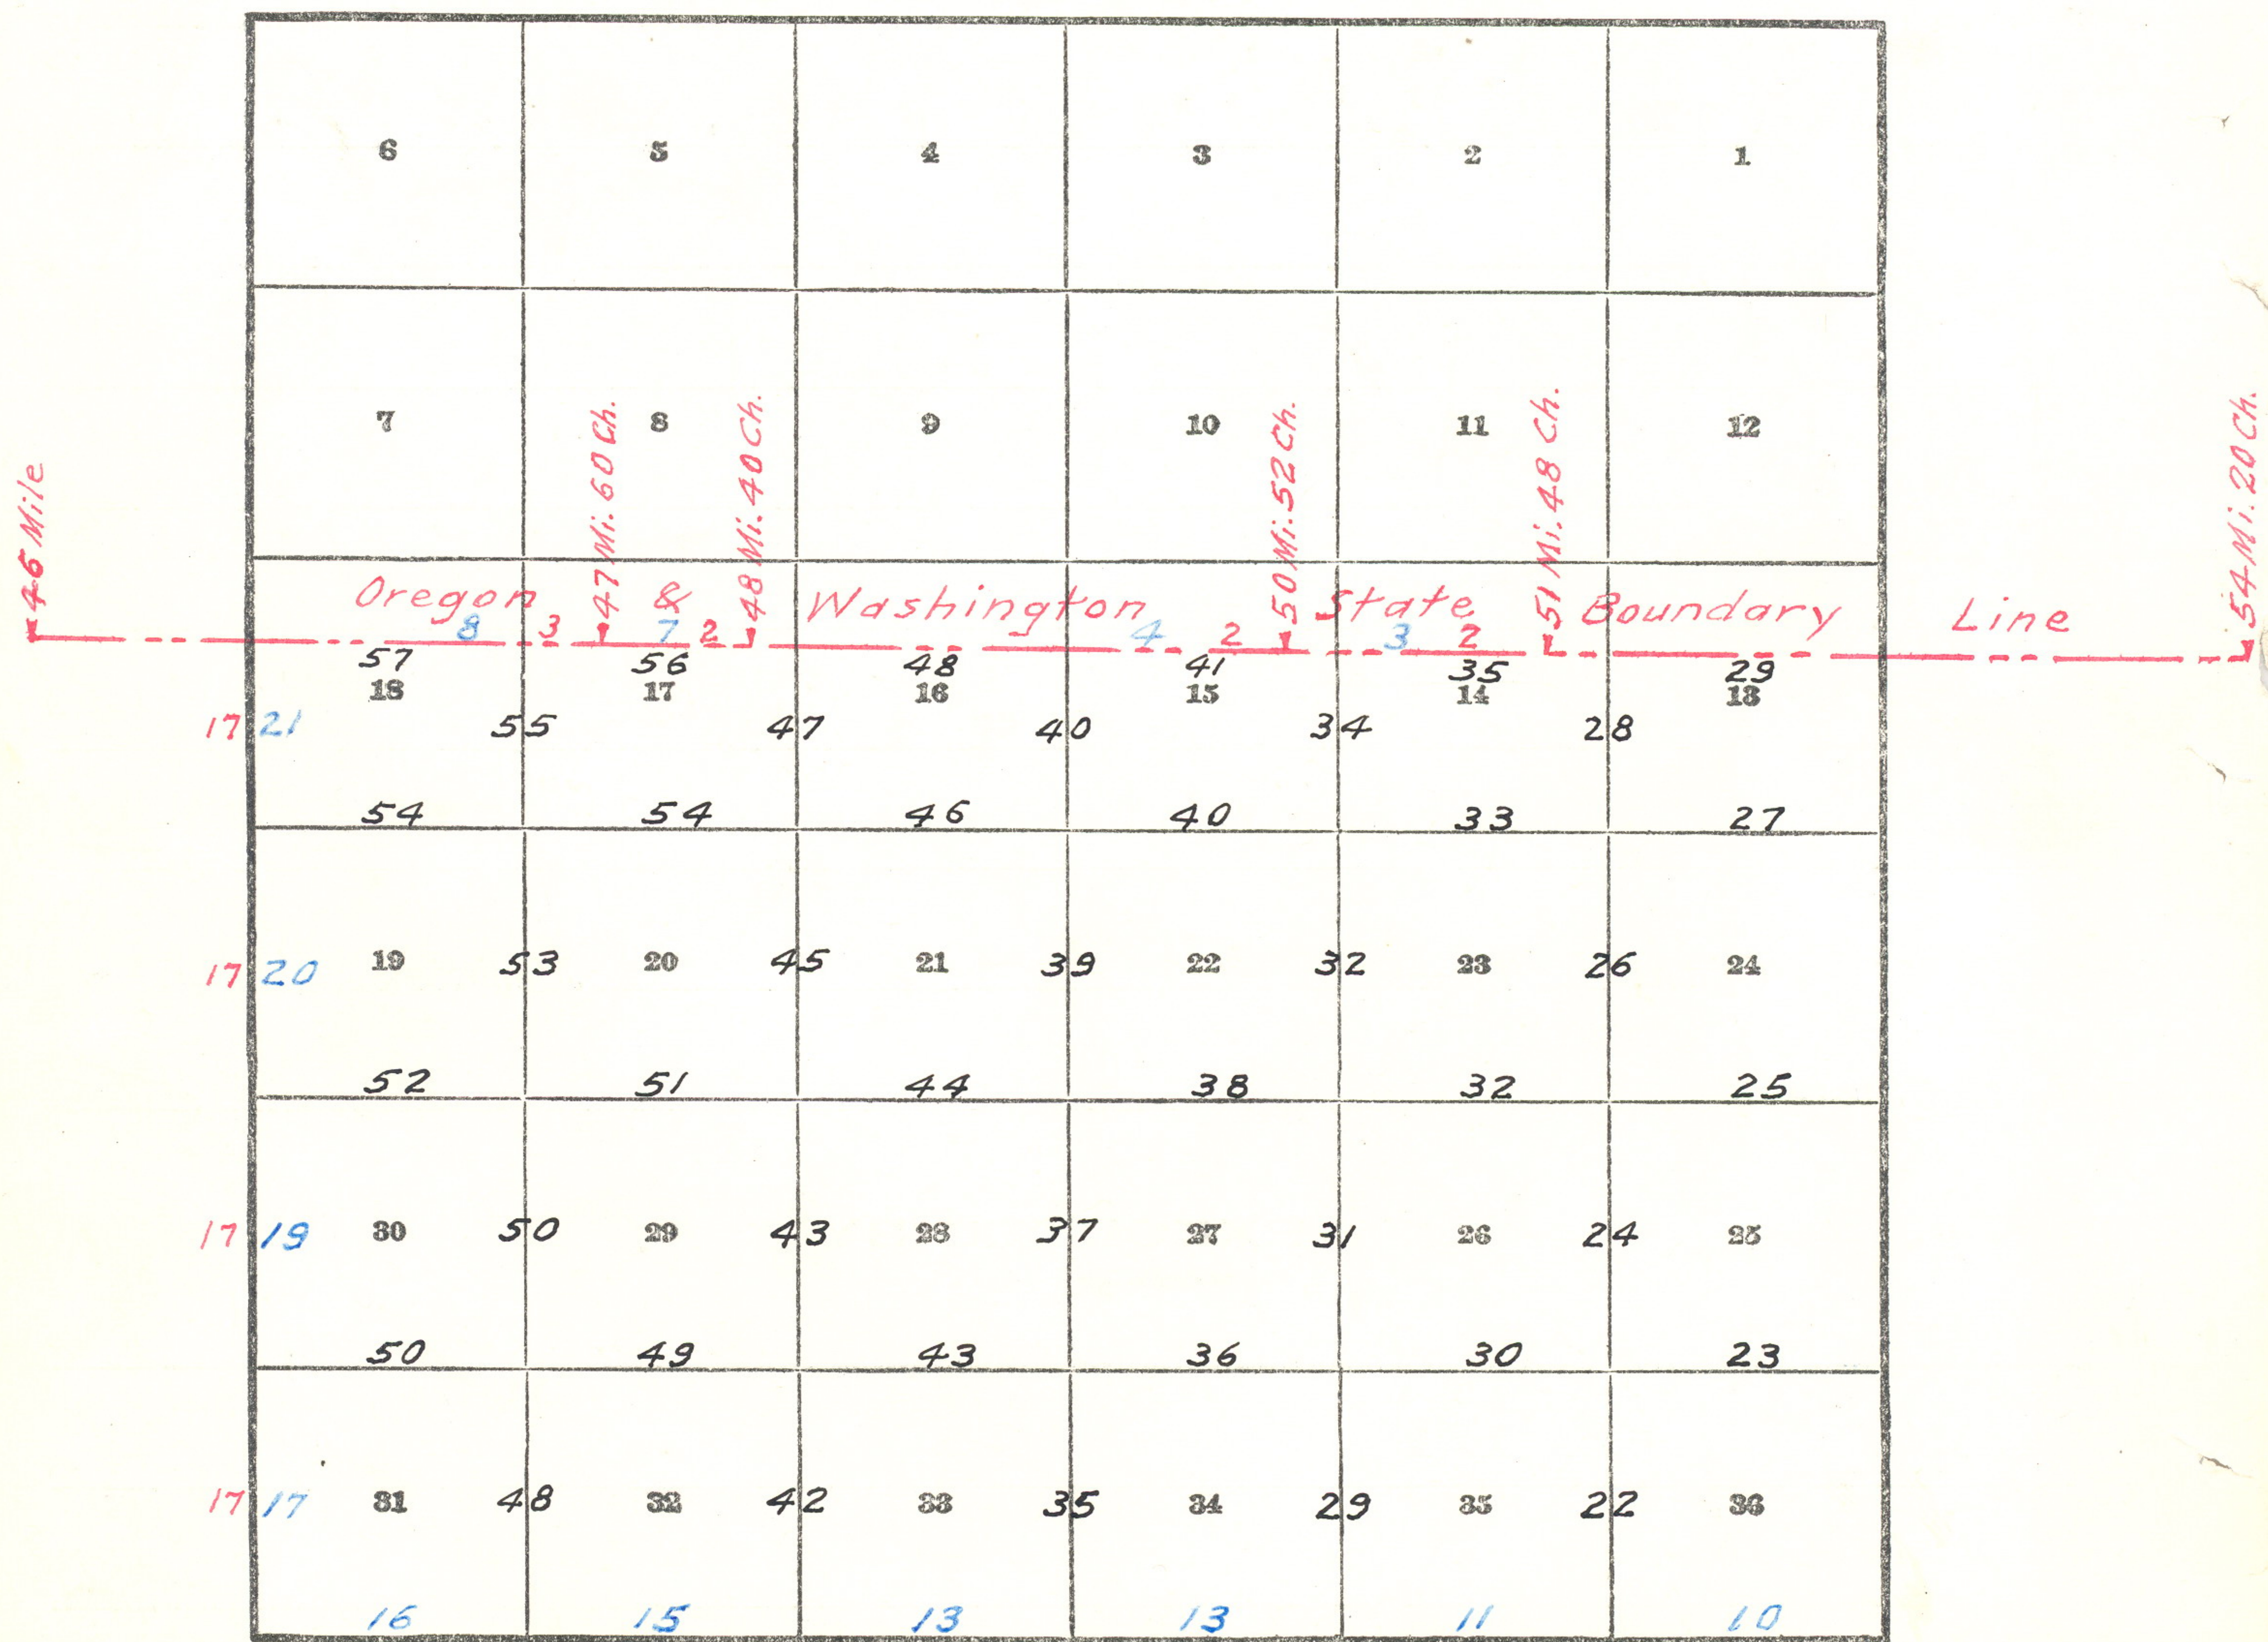

6-151

Retracements indexed in Red.

Resurveys indexed in Blue.

Original surveys indexed in Black.

Township 6 North, Range 39 East.

The retracement and dependent resurvey of the Oregon and Washington state boundary through range 39 east, the retracement and resurvey of the west boundary, independent resurvey of the south boundary and subdivisional lines of fractional township 6 north, range 39 east, were executed with a Burt solar compass made by W. and L. E. Gurley, serial No. 20, U. S. G. S., constructed in accordance with the standard specifications of the General Land Office. The horizontal circle has a diameter of $5\frac{3}{4}$ ins., with opposite double verniers reading to single minutes; the sight vanes have a length of 8 ins. and a spread of 14 ins. The instrument is equipped with a Burt solar attachment; radius of latitude arc 5.4 ins., and decl. arc $4\frac{3}{4}$ ins., each with verniers reading to single minutes.

The observations in camp; on Polaris for the establishment of the meridian; and the altitude observations on the sun on the meridian to verify the latitude and the reading of my watch, were executed with a light mountain solar transit made by Buff and Buff, serial No. 9987, constructed in accordance with the standard specifications of the General Land Office. The horizontal circle has a diameter of $4\frac{1}{2}$ inches, with two double opposite verniers reading to single minutes; the vertical circle has a diameter of 4 ins., with one double vernier reading to single minutes; the telescope has fixed stadia wires, ratio 1:132, with focal constant of 1.2 lks. The instrument is equipped with improved Smith solar attachment: radius of latitude arc $2\frac{1}{2}$ ins., and of decl. arc $3\frac{1}{2}$ ins., each with verniers reading to single minutes. The instruments were in good condition, having been placed in satisfactory adjustment prior to the beginning of the survey, and tested and found free from appreciable error, were approved by the district cadastral engineer on May 19, 1932. I examined all the instrumental adjustments before making the field tests hereinafter recorded.

The direction of all lines was determined by solar compass method. The measurements were made with a Lallie steel tape, 5 chs. in length, graduated every link for the first 100 lks., and the balance at intervals of 10 lks. The tape was tested by comparison with a Lufkin standard 1 ch. steel tape and found correct. The measurements were made on the slope, and the vertical angle of each interval was ascertained by a clinometer in good adjustment: the horizontal equivalents are entered in the field note record.

The data furnished with the special instructions gives the geographic position for the SW. cor. of T. 5 N., R. 39 E., as follows: latitude $45^{\circ}52'N.$, and longitude $118^{\circ}00'W.$

July 23, 1932, in camp located near the center of sec. 25, at 11h 35m 07s p. m., l.m.t., or 11h 26m 40s p. m. by my watch, which reads correct 120th meridian time as determined by radio signal I observe Polaris at eastern elongation, making two sights each with the telescope in direct and reversed positions, and place a tack at the mean point, on a peg driven firmly in the ground 10 chs. N. July 24, after sunrise, I lay off the azimuth of Polaris $1^{\circ}31'44''$, and make a meridian mark on a second peg, 26.68 lks. (17.61 ft.) to the west of the mean point in the line determined by the observation; I verify the angle by a vernier reading of the instrument.

In order to verify the latitude of this station and the reading of my watch, I make a meridian observation of the sun, first setting on the lower limb and noting the transit of the west limb, then after reversal of the instrument, setting on the upper limb and noting the transit of the east limb, as follows:

Mean observed altitude	-----	63° 50' 30"
Reduced latitude	-----	45° 58' 03"
Mean watch time of observation	-----	11h 57m 52s
Watch slow of L. m. t.	-----	8m 27s

Township 6 North, Range 39 East.

Same, by reference to radio time signals and calculated difference in longitude ----- 8m 27s.

Every 30 minutes from 6 to 10.30 a. m. and from 1.30 to 6 p. m., I make proper settings on the arcs of the solar attachment and ascertain that the resulting orientation of the instrument, when compared with the meridian established by Polaris observation, has a maximum error less than 1' 30".

I repeat the tests of the arcs daily by noon observation and verify the meridional indications at frequent intervals throughout the survey.

The observed magnetic declination is 21° 50' E.

Chains Resurvey of Part of the Oregon and Washington Boundary

"Dependent resurvey, reestablishment of the surveys executed by Daniel G. Major, Astronomer and Surveyor, in 1864"

Retracement

From the 51 mile 48 ch. monument, on the Oregon and Washington boundary.

West, retracing the Oregon and Washington boundary.

1.13 Fall 2 lks. S. of the $\frac{1}{4}$ sec. cor. of sec. 14, T. 6 N., R. 39 E., established under group No. 130, Washington.

41.13 Fall 77 lks. S. of the cor. of secs. 14 and 15, T. 6 N., R. 39 E., established under group No. 130, Washington.

78.90 Fall 146 lks. S. of the 50 mile 52 chain monument.

This line is N. 88° 56' W., 78.91 chs.

From the monument,

West, retracing the Oregon and Washington boundary.

2.23 Fall 1 lk. S. of the $\frac{1}{4}$ sec. cor. of sec. 15, T. 6 N., R. 39 E., established under group No. 130, Washington.

42.23 Fall 14 lks. S. of the cor. of secs. 15 and 16, T. 6 N., R. 39 E., established under group No. 130, Washington.

82.23 Fall 27 lks. S. of the $\frac{1}{4}$ sec. cor. of sec. 16, T. 6 N., R. 39 E., established under group No. 130, Washington.

122.23 Fall 39 lks. S. of the cor. of secs. 16 and 17, T. 6 N., R. 39 E., established under group No. 130, Washington.

155.17 Fall 50 lks. S. of the 48 mile 40 chain monument.

This line is N. 89° 49' W., 155.17 chs.

From the monument,

West, retracing the Oregon and Washington boundary.

7.06 Fall 2 lks. S. of the $\frac{1}{4}$ sec. cor. of sec. 17, T. 6 N., R. 39 E., established under group No. 130, Washington.

44.50 Fall 14 lks. S. of the 47 mile 60 chain monument.

This line is N. 89° 49' W., 44.50 chs.

From the monument,

Resurvey of Part of the Oregon and Washington Boundary.

Chains

from which

A fir, 14 ins. diam., bears N.47°E., 31 lks. dist., marked T 6 N R 39 E S 18 C C B T.

A fir, 14 ins. diam., bears N.31½°W., 36 lks. dist., marked T 6 N R 39 E S 13 C C B T.

Desc. 115 ft. over NW. slope.

105.75 Asc. 205 ft. over broken NE. slope.

111.45 Spur, slopes N.; along broken N. slope.

120.75 Spur, slopes N.20°W.; desc. 115 ft. over NW. slope.

124.80 Ravine, course N.; asc. 210 ft. over broken NE. slope.

134.86 The 46 mile monument, on the Oregon and Washington boundary, which has been perpetuated under group No. 130, Washington, and now is an iron post, 3 ins. diam., set 36 ins. in the original mound of stone to top, with brass cap marked

46 M

W

0

1931

from which

A fir, 20 ins. diam., bears N.10°E., 56 lks. dist., marked 46 M W B T.

A fir, 32 ins. diam., bears S.26°E., 44 lks. dist., marked 46 M O B T.

A fir, 24 ins. diam., bears S.6°W., 20 lks. dist., marked 46 M O B T.

A fir, 7 ins. diam., bears N.5°W., 17 lks. dist., marked 46 M W B T.

This monument stands on summit of spur, which slopes N.

Land, mountainous and level.

Soil, sandy loam, rocky; 3rd rate.

Timber, fir, pine, spruce and tamarack.

Undergrowth, alder, vinemaple, Oregon grape, rose, sumac, cherry, mountain mahogany, mountain laurel, mountain ash and syringa.

Independent Resurvey of the South Bdy. of T. 6 N., R. 39 E.

"Independent resurvey, superseding the survey executed by Rufus S. Moore, U. S. Deputy Surveyor in 1882."

Beginning at the cor. of Tps. 5 and 6 N., Rs. 39 and 40 E., in latitude 45°57'N., and longitude 117°52'31"W.; as described in T. 5 N., R. 40 E., of this group.

West, bet. secs. 1 and 36.

Asc. 120 ft. over SE. slope, through timber and brush.

5.00 Spur, slopes S.; desc. 80 ft. over SW. slope.

Independent Resurvey of the South Boundary of T. 6 N., R. 39 E.

- Chains 9.90 Ravine, course S.; asc. 85 ft. over SE. slope.
- 13.30 Spur, slopes S.; desc. 810 ft. over SW. slope.
- 32.55 Shoofly Creek, 5 lks. wide, course S., from NW.; asc. 110 ft. over E. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked

S36
S 1

from which,

A fir, 30 ins. diam., bears N. 35° W., 49 lks. dist., marked 1/4 S. 36 B. T.

A fir, 30 ins. diam., bears S. 21° E., 56 lks. dist., marked 1/4 S. 1 B. T.

At a point, record distance west of the original cor. of Tps. 5 and 6 N., Rs. 39 and 40 E., find no trace of the original 1/4 sec. cor. of secs. 1 and 36.

Continue to asc. 710 ft. over SE. slope.

67.10 Ridge, bears N. and S.; desc. 260 ft. over W. slope, slope changes to SW.

80.00 Set an iron post, 3 ft. long, 2 1/2 ins. diam., 27 ins. in the ground, for cor. of secs. 1, 2, 35, and 36, with brass cap marked

T6NR39E
S35 | S36

S 2 | S 1

1932 from which,

A fir, 36 ins. diam., bears N. 33° E., 75 lks. dist., marked T 6 N R 39 E S 36 B T.

A fir, 20 ins. diam., bears S. 65° E., 18 lks. dist., marked T 5 N R 39 E S 1 B T.

A fir, 30 ins. diam., bears S. 32° W., 87 lks. dist., marked T 5 N R 39 E S 2 B T.

A fir, 18 ins. diam., bears N. 75° W., 5 lks. dist., marked T 6 N R 39 E S 35 B T.

From this cor. the original cor. of secs. 1, 2, 35 and 36, which is a basalt stone, 10x10x5 ins. above ground, firmly set, marked and witnessed as described in the official record, bears N. 60° 45' W., 730 lks. dist.

I destroyed this old cor. and obliterate the marks on the bearing trees.

Land, mountainous.
Soil, sandy loam, rocky; 3rd rate.
Timber, fir, pine, spruce, yew and tamarack.
Undergrowth, alder, huckleberry, vinemaple, salal, syringa, mountain balm, mountain ash, buck brush, mountain ash, willow, fern, Oregon grape and rose.

West, bet. secs. 2 and 35.
Desc. 5 ft. over SW. slope, through timber and brush.

Independent Resurvey of the South Bdy. of T. 6 N., R. 39 E.

Chains

0.30 Ravine, course SE.; asc. 360 ft. over E. slope.

16.10 Ridge, bears N. and S.; desc. 750 ft. over W. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S35
S 2

1932

from which,

A fir, 12 ins. diam., bears N.13°W., 27 lks. dist., marked $\frac{1}{4}$ S 35 B T.

A tamarack, 35 ins. diam., bears S.45°E., 27 lks. dist., marked $\frac{1}{4}$ S 2 B T.

From this cor. the original $\frac{1}{4}$ sec. cor. of secs. 2 and 35, which is a basalt stone, 10x8x5 ins. above ground, firmly set, marked and witnessed as described in the official record, bears N.79°40'W., 826 lks. dist.

I destroy this old cor. and obliterate the scribe marks on the old bearing trees.

Continue to desc. 210 ft. over W. slope.

44.60 Ravine, course SW.; asc. 40 ft. over SE. slope.

55.50 Spur, slopes SW.; desc. 510 ft. over SW. slope.

71.00 Milk Creek, 15 lks. wide, course S.; asc. 140 ft. over SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 2, 3, 34, and 35, with brass cap marked

T6NR39E

S34 | S35

S 3 | S 2

T5N

1932

from which,

A fir, 10 ins. diam., bears N.68°E., 90 lks. dist., marked T 6 N R 39 E S 35 B T.

A fir, 10 ins. diam., bears S.21°E., 16 lks. dist., marked T 5 N R 39 E S 2 B T.

A fir, 30 ins. diam., bears S.52 $\frac{1}{2}$ °W., 69 lks. dist., marked T 5 N R 39 E S 3 B T.

A fir, 36 ins. diam., bears N.56°W., 70 lks. dist., marked T 6 N R 39 E S 34 B T.

From this cor. the original cor. of secs. 2, 3, 34, and 35, which is the original stone, marked and witnessed as described in the original record, bears N.61°25'W., 675 lks. dist.

I destroy this old cor. and obliterate the scribe marks on the old bearing trees.

Land, mountainous.

Soil, sandy loam, rocky; 3rd rate.

Timber, fir, pine, spruce, yew and tamarack.

Undergrowth, alder, rose, huckleberry, salal, willow, vine-maple, Oregon grape, buck brush, mountain ash and fern.

Independent Resurvey of the South Bdy. of T. 6 N., R. 39 E.

Chains

West, bet. secs. 3 and 34.

Along broken S. slope, through timber and dense brush.

11.60 Asc. 255 ft. over SE. slope.

39.50 Small spur, slopes S.; desc. 10 ft. over SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4}$ S34

S 3

1932

from which,

A fir, 38 ins. diam., bears N.60°W., 16 lks. dist., marked $\frac{1}{4}$ S 34 B T.A spruce, 14 ins. diam., bears S.10°E., 51 lks. dist., marked $\frac{1}{4}$ S 3 B T.At a point record distance West of the original cor. of secs. 2, 3, 34, and 35, find no trace of the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34.

Continue to desc. 50 ft. over SW. slope.

44.50 Creek, 2 lks. wide, course S.; asc. 425 ft. over broken SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, for cor. of secs. 3, 4, 33, and 34, with brass cap marked

T6NR39E

S33 | S34

S 4 | S 3

T5N

1932

from which

A fir, 7 ins. diam., bears N.17°E., 21 lks. dist., marked T 6 N R 39 E S 34 B T.

A fir, 4 ins. diam., bears S.56°E., 10 lks. dist., marked B T.

A fir, 6 ins. diam., bears S.20°W., 22 lks. dist., marked T 5 N R 39 E S 4 B T.

A fir, 8 ins. diam., bears N.43°W., 52 lks. dist., marked T 6 N R 39 E S 33 B T.

The original cor. of secs. 3, 4, 33, and 34, which is the original stone, marked and witnessed as described in the official record, bears N.69°W., 688 lks. dist. I destroy all evidence of this old cor.

Land, mountainous.

Soil, sandy loam, rocky; 3rd rate.

Timber, fir, pine, spruce and tamarack.

Undergrowth, alder, vinemaple, willow, huckleberry, rose, mountain laurel, mountain ash, Oregon grape, fern, buck brush and thimble berry.

West, bet. secs. 4 and 33.

Asc. 155 ft. over SE. slope, through timber and brush.

Independent Resurvey of the South Bdy. of T. 6 N., R. 39 E.

Chains

- 5.05 Spur, slopes S.; desc. 130 ft. over SW. slope.
- 13.45 Dry creek bed, 2 lks. wide, course S.; asc. 470 ft. over broken SE. slope.
- 27.50 Spur, slopes SE.; continue to asc. 90 ft. over gradual SE. slope.
- 36.75 Spur, slopes S.; desc. 60 ft. over SW. slope.
- 39.65 Ravine, course S.; asc. 10 ft. over SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S33
 S 4
 1932

from which,

- A fir, 14 ins. diam., bears N. 71° E., 61 lks. dist., marked $\frac{1}{4}$ S 33 B T.
- A fir, 46 ins. diam., bears S. 6° W., 24 lks. dist., marked $\frac{1}{4}$ S 4 B T.

From this cor. the original $\frac{1}{4}$ sec. cor. of secs. 4 and 33, which is a point determined from the original bearing trees, as described in official record, bears N. 74° 34' W., 774 lks. dist.

I destroy this old cor. by obliterating the scribe marks on the old bearing trees.
Continue to asc. 235 ft. over SE. slope.

- 47.35 Spur, slopes S.; desc. 520 ft. over W. slope.
- 61.50 Dry creek bed, 8 lks. wide, course S.
- 62.55 Spring branch, 2 lks. wide, course SE.; asc. 585 ft. over E. slope.
- 79.90 Ridge, bears N. and S.; divide between the Wenaha and Walla Walla Rivers.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock, and in a mound of stone to top, for cor. of secs. 4, 5, 32, and 33, with brass cap marked

T6NR39E
 S32 | S33
 S 5 | S 4
 T5N
 1932

from which

- A fir, 18 ins. diam., bears N. 54° E., 183 lks. dist., marked T 6 N R 39 E S 33 B T.
- A spruce, 18 ins. diam., bears S. 55 $\frac{1}{2}$ ° E., 160 lks. dist., marked T 5 N R 39 E S 4 B T.
- A fir, 24 ins. diam., bears S. 81° W., 95 lks. dist., marked T 5 N R 39 E S 5 B T.

A spruce, 10 ins. diam., bears N. 63° W., 161 lks. dist., marked T 6 N R 39 E S 32 B T.

From this cor. the original cor. of secs. 4, 5, 32 and 33, which is a point determined from the original bearing

Independent Resurvey of the South Bdy. of T. 6 N., R. 39 E.

Chains	trees as described in the official record, bears N.76° 06'W., 9.12 chs. dist.
	I destroy this old cor. by obliterating the scribe marks on the old bearing trees.
	Land, mountainous.
	Soil, sandy loam, rocky, 3rd rate.
	Timber, fir, pine, spruce, tamarack and yew.
	Undergrowth, salal, alder, vinemaple, huckleberry, fern, syringa, nettles, mountain mahogany, Oregon grape, mountain ash, mountain laurel and buck brush.
	West, bet. Secs. 5 and 32.
	Desc. 705 ft. over W. slope, through timber and brush.
3.30	Skyline Road, bears N. and S.
4.40	Telephone line, bears N. and S.
5.30	Telephone line, bears SE., and NW. to Price Guard Station.
29.20	Spring, bears S., 35 lks. dist.
34.75	South Fork of the Walla Walla River, 6 lks. wide, course S.; asc. 85 ft. over gradual E. slope.
37.08	Trail, bears N. and S.
38.00	Price Guard Station, bears N. about 8.00 chs. dist.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.
	$\frac{1}{4}$ S32
	S 5
	1932
	from which
	A fir, 8 ins. diam., bears N.8°W., 14 lks. dist., marked $\frac{1}{4}$ S 32 B T.
	A fir, 18 ins. diam., bears S.30°E., 34 lks. dist., marked $\frac{1}{4}$ S 5 B T.
	At a point record distance west of the original cor. of secs. 4, 5, 32, and 33, find no trace of the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32.
	Continue to asc. 210 ft. over gradual E. slope.
49.05	Telephone line, bears NE. and SW.
50.15	Trail, bears NE. and SW.
53.00	Top of ascent, bears N. and S.; thence over rolling land.
62.50	Asc. 145 ft. over gradual E. slope.
74.45	Trail, bears NW. and SE.
75.00	Top of ascent, bears N. and S.; thence over rolling land.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 5, 6, 31, and 32, with brass cap marked

Independent Resurvey of the South Bdy. of T. 6 N., R. 39 E.

Chains

T6NR39E

S31|S32

S 6|S 5

T5N

1932

from which

A fir, 12 ins. diam., bears N.28°E., 18 lks. dist.,
marked T 6 N R 39 E S 32 B T.

A fir, 12 ins. diam., bears S.39°E., 53 lks. dist.,
marked T 5 N R 39 E S 5 B T.

A fir, 8 ins. diam., bears S.82°W., 49 lks. dist.,
marked T 5 N R 39 E S 6 B T.

A fir, 14 ins. diam., bears N.62°W., 40 lks. dist.,
marked T 6 N R 39 E S 31 B T.

From this cor. the original cor. of secs. 5, 6, 31, and
32, which is a point determined by the original bearing
trees, as described in the official record, bears
N.75°30'W., 719 lks. dist. I destroy this old cor. by
obliterating the scribe marks on old bearing trees.

Land, mountainous.

Soil, sandy loam, rocky; 3rd rate.

Timber, fir, pine, spruce and tamarack.

Undergrowth, alder, huckleberry, vinemaple, willow, fern,

Oregon grape, salal, mountain laurel, mountain ash,
mountain mahogany and buck brush.

West, bet. secs. 6 and 31.

Asc. 170 ft. over gradual E. slope, through timber and
brush.

7.30 New road, now under construction, bears N. and S.

17.80 Ridge, bears NE. and SW.; desc. 115 ft. over NW. slope.

24.62 Intersect the West Bdy. of T. 6 N., R. 39 E., projected
South, 1.95 chs. dist., from old cor. of Tps. 6 N.,
Rs. 38 and 39 E. hereinafter described.

At point of intersection.

Set an iron post, 3 ft. long, 3 ins. diam., 12 ins. in
the ground to solid rock, and in a mound of stone to
top, for cor. of T. 6 N., R. 39 E. only, with brass
cap marked

T6N

R39E

S31

T5NR39E

S 6

1932

from which

A spruce, 6 ins. diam., bears N.7°E., 77 lks. dist.,
marked T 6 N R 39 E S 31 B T.

A fir, 12 ins. diam., bears N.52°E., 61 lks. dist.,
marked T 6 N R 39 E S 31 B T.

Land, mountainous.

Soil, sandy loam, rocky; 3rd rate.

Timber, fir, pine, spruce, and tamarack.

Undergrowth, huckleberry, salal, vinemaple, cherry, alder,
mountain mahogany, Oregon grape and syringa.

Subdivision of T. 6 N., R. 39 E.

Chains

To complete the survey of sec. 18, I go to the closing cor. of Tps. 6 N., Rs. 38 and 39 E., and run

S. 89° 49' E., along the Oregon and Washington boundary

5.76 40.00 chs. in departure west of the closing cor. of secs. 17 and 18.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 18 only, with brass cap marked

W N
 $\frac{1}{4}$ S 18

1932

from which

A fir, 14 ins. diam., bears S. 37° E., 23 lks. dist., marked $\frac{1}{4}$ S 18 B T.

A fir, 14 ins. diam., bears S. 59° W., 48 lks. dist., marked $\frac{1}{4}$ S 18 B T.

FINAL TEST OF SOLAR ATTACHMENT.

Sept. 13, 1932: in camp located near the cor. of secs. 4, 5, 8, and 9, T. 5 N., R. 39 E., in latitude 45° 56' N., longitude 117° 57' 30" W., at 7h 0m a.m., app. t., I set off 45° 56' N., on the lat. arc; 3° 47' N., on the decl. arc; and orient the instrument with the solar; the line of sight agrees with the meridian established by Polaris observation.

At 4h 0m p. m., app. t., I set off 45° 56' N., on the lat. arc; 3° 37' N., on the decl. arc; and repeat the test of the solar; the line of sight agrees with the meridian established by Polaris observation.

GENERAL DESCRIPTION.

Fractional township 6 north, range 39 east, is located entirely within the Umatilla National Forest. The general elevation of the township is about 5000 ft. above sea level; the summit of the main divide or along the Skyline Road is about 1,000 ft. higher. The elevation of the Round Butte Trail and of Paradise Ridge is about the same as along the Skyline Road. The northwest cor. of the township is set at an elevation of about 3,000 ft. above sea level and is the lowest elevation in the township. Most of this township is very rough and stony. The soil is of a sandy loam composition and in most parts is very rocky. The timber in most parts of this township is of a second growth variety. Very few trees are found with a diameter of over 3 feet. In some places the trees even have a stunted look and it is doubtful if they will ever grow very large. This timber is all too far from market to have any commercial value at this time.

This township has no large streams but is well watered by many small streams in all parts. This township is located so near the highest part of the mountains that it drains in every direction.

The most important development at the present time is the Skyline Road, extending NE. and SW., through the central part of this township. A new road is under construction that turns off the Skyline Road in sec. 28, loops through sec. 29, 32, and 31, and will eventually join a road in Mill Creek leading to Walla Walla, Wash. There are also several good trails; Round Butte Trail in the northeastern part, Paradise Ridge Trail, in the north-

Township 6 North, Range 39 East.

central part, and a trail leading to the Price Guard Station in sec. 32. This Guard Station is located on the headwaters of the South Fork of the Walla Walla River in the southern part of sec. 32. Price Guard Station is located in one of the most beautiful spots in the Blue Mountain Range.

The western part of this township comes within the watershed of the city of Walla Walla, Wash., and no one is allowed to enter without a permit. Several thousand head of sheep are grazed annually during the summer months in the eastern part of this fractional township.

The average of a considerable number of readings over all parts of the township gives a value of 21°45'E., for the mean magnetic declination. There is a range of over 10° in local attraction.

1932

from which

A fir, 14 ins. diam., bears S. 37° E., 23 lks. dist., marked 1/2 S 18 B T.
A fir, 14 ins. diam., bears S. 52° W., 48 lks. dist., marked 1/2 S 18 B T.

FINAL TEST OF SOLAR ATTACHMENT.

Sept. 13, 1932: in camp located near the cor. of sec. 4, 5, and 9, T. 5 N., R. 39 E., in latitude 45° 55' N., longitude 117° 30' W., at 7:00 a.m., app. 1 set of instrument with the solar; the line of sight agrees with the meridian established by Polaris observation.
At 4:00 p.m., app. 1 set off 45° 55' N., on the lat. arc; 3° 37' N., on the decl. arc; and repeat the test of the solar; the line of sight agrees with the meridian established by Polaris observation.

GENERAL DESCRIPTION.

Fractional township 6 north, range 39 east, is located entirely within the Umatilla National Forest. The general elevation of the township is about 5000 ft. above sea level; the summit of the main divide or along the Skyline Road is about 1,000 ft. higher. The elevation of the Round Butte Trail and of Paradise Ridge is about the same as along the Skyline Road. The northwest cor. of the township is set at an elevation of about 3,000 ft. above sea level and is the lowest elevation in the township. Most of this township is very rough and stony. The soil is of a sandy loam composition and in most parts is very rocky. The timber in most parts of this township is of a second growth variety. Very few trees are found with a diameter of over 3 feet. In some places the trees even have a stunted look and it is doubtful if they will ever grow very large. This timber is all too far from market to have any commercial value at this time.
This township has no large streams but is well watered by many small streams in all parts. This township is located so near the highest part of the mountains that it drains in every direction.
The most important development at the present time is the Skyline Road, extending NE. and SW., through the central part of this township. A new road is under construction that turns off the Skyline Road in sec. 32, loops through sec. 29, 32, and 31, and will eventually join a road in Mill Creek leading to Walla Walla, Wash. There are also several good trails; Round Butte Trail in the northeastern part, Paradise Ridge Trail, in the north-

4-680
(August, 1926)

FIELD ASSISTANTS.

NAMES.	CAPACITY.
Leonel R. Davidson	1st Chainman.
Richard Ganong	2nd Chainman.
Earl Gould	Cornerman.
Harold Gould	Axeman.
Norman Prendergast	Axeman.
Willis Powers	Axeman.
Glenn H. Johnson	2nd Chainman.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Otis O. Gould ^{U. S. Transitman} ~~U. S. Surveyor~~, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Oregon bearing date of the 11th day of April, 1929, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the retracement and dependent resurvey of part of the Oregon and Washington boundary, the independent resurvey of the south boundary, the dependent resurvey of the west boundary and the subdivisional lines of township 6 north, range 39 east. of the Willamette Meridian, in the State of Oregon, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Oregon and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Portland, Ore.
Mar. 15, 1933.

Otis O. Gould
U. S. Surveyor

APPROVAL.

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

DENVER, COLORADO MAR 30 1936, 19

The foregoing field notes of the retracement and Dependent Resurvey of the Oregon and Washington State Boundary from 51 Mile 48 Chain Monument to 46 Mile Monument; Independent Resurvey of the South Boundary; Dependent Resurvey of the West Boundary, and the survey of the Subdivisional Lines of Township No. 6 North, Range No. 39 East, of the Willamette Meridian, Oregon,

executed by Otis O. Gould, U. S. Transitman, under his special instructions dated April 11, 1929, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Grant H. Armon
U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above-described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~