

# FIELD NOTES


Of the survey of the Subdivisional  
 Lines of Town 5 South Range  
34 East of the, Willamette Meridian,  
 Oregon, as surveyed by Rufus S. Moore  
 U. S. Deputy Surveyor, under his Contract No. 451  
 dated June 12, 1882

Survey commenced, October 15<sup>th</sup> 1882

Survey completed, October 22<sup>nd</sup> 1882

## NAMES AND DUTIES OF ASSISTANTS.

- Rufus S. Moore, Compassman.
- James Guttridge, Chainman.
- John Guttridge, Chainman.
- \_\_\_\_\_, Chainman.
- \_\_\_\_\_, Chainman.
- Joe Parodi, Axeman.
- \_\_\_\_\_, Axeman.
- \_\_\_\_\_, Flagman.

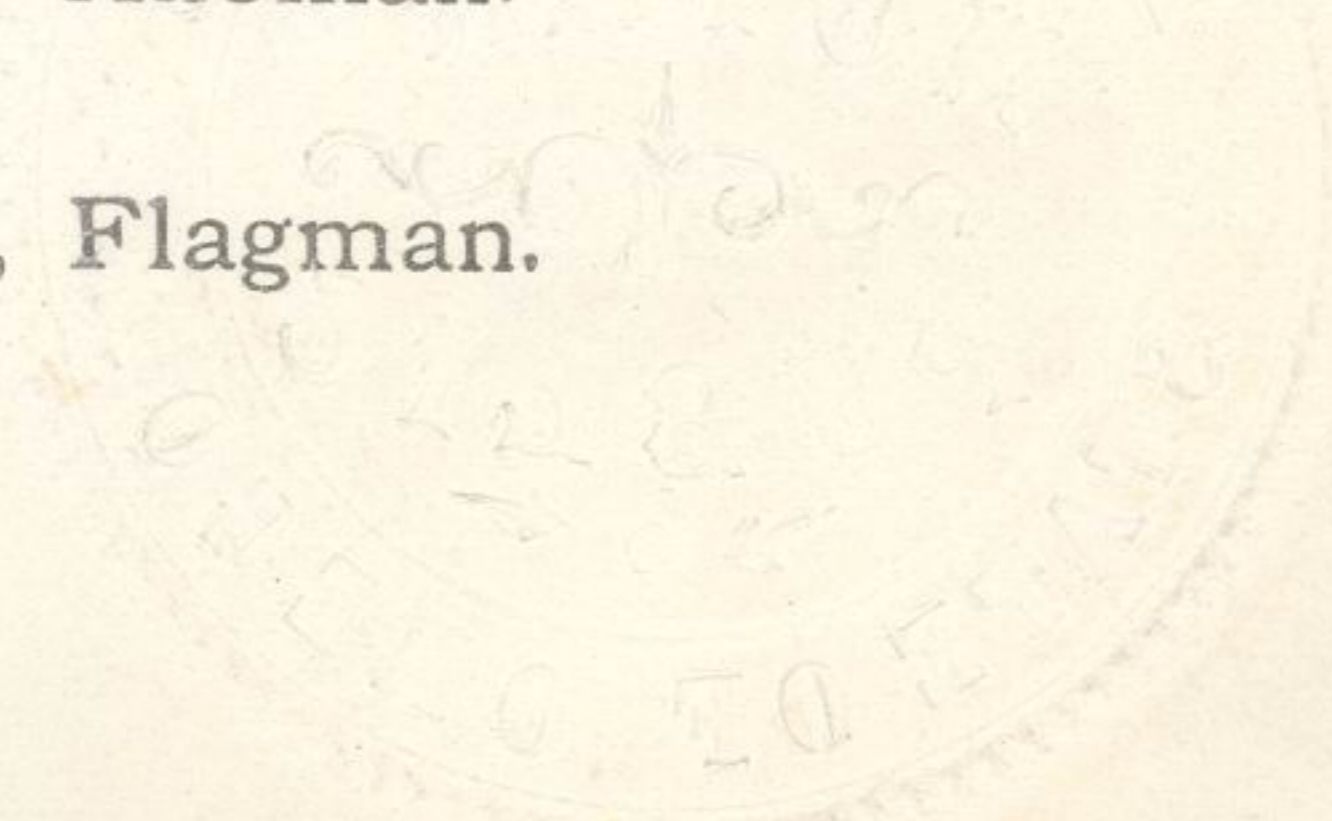



759

# PRELIMINARY OATHS OF ASSISTANTS:

We, James Guttridge and  
John Guttridge

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the Subdivisional  
\_\_\_\_\_ lines of Town 5 South  
Range 33 1/2 East Willamette Meridian, Oregon.

James Guttridge, Chainman.

John Guttridge, Chainman.

\_\_\_\_\_, Chainman.

\_\_\_\_\_, Chainman.

Subscribed and sworn to before me, this Fifteenth  
day of August 1882

[SEAL.]

Rufus D. Moore  
Notary Public

We, Joe Parodi and

do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability,

in the survey of the Subdivisional lines of  
Town 5 S, R. 34 East of Willamette Meridian, Oregon.


Joe Parodi, Axeman.

\_\_\_\_\_, Axeman.

Subscribed and sworn to before me, this Fifteenth  
day of August 1882

[SEAL.]

Rufus D. Moore  
Notary Public

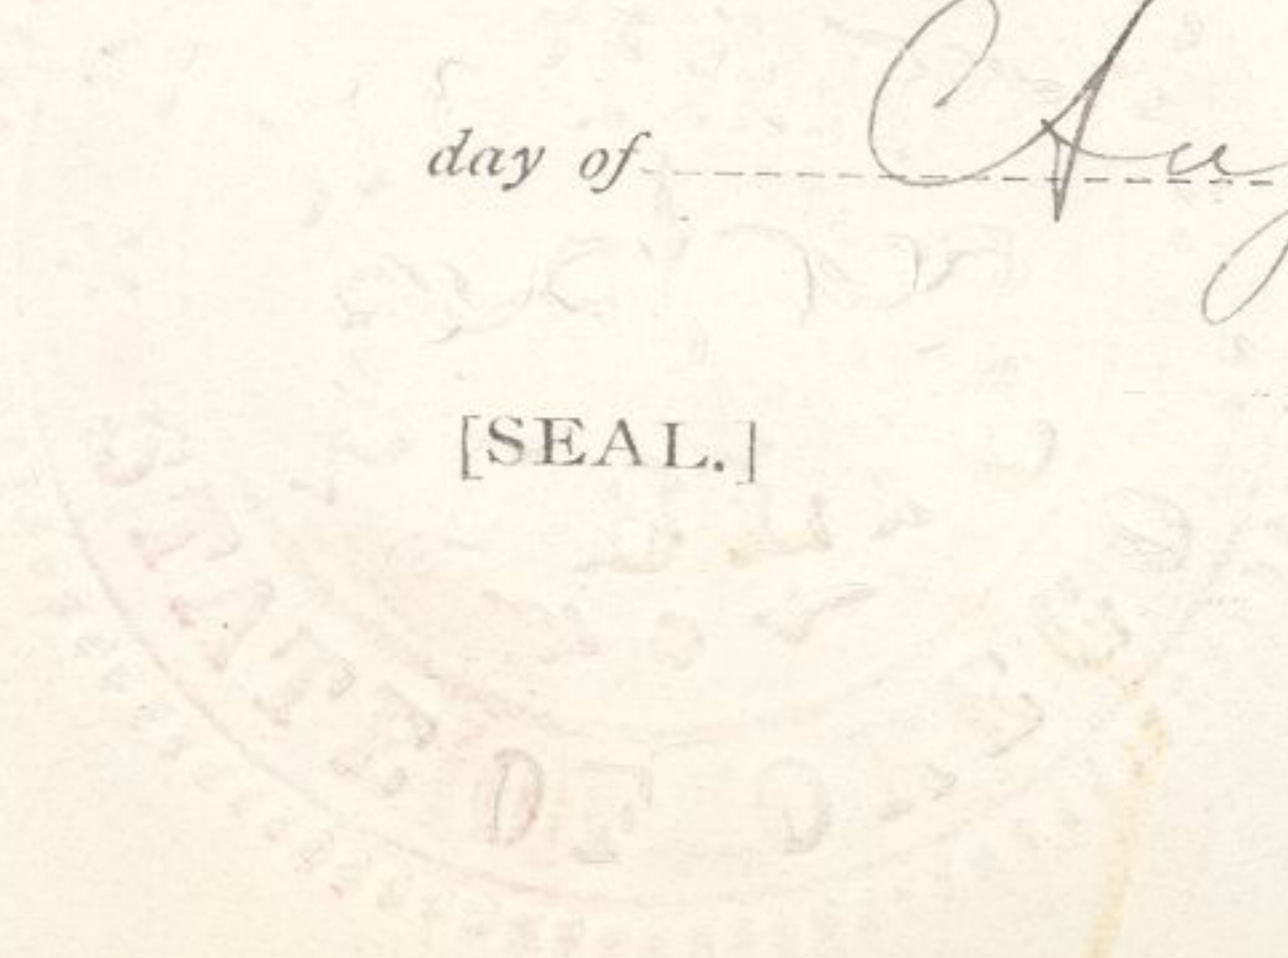



## INDEX.

Referring the Lines to the Pages of the field Notes.

T. *5 South* R. *34 East* Will. Mer.

6	93	5	68	4	52	3	35	2	19	1
<del>91</del>		<del>90</del>		<del>67</del>		<del>51</del>		<del>34</del>		<del>17</del>
7	89	8	66	9	49	10	33	11	15	12
<del>87</del>		<del>86</del>		<del>64</del>		<del>48</del>		<del>31</del>		<del>13</del>
18	84	17	63	16	46	15	30	14	11	13
<del>83</del>		<del>81</del>		<del>62</del>		<del>45</del>		<del>28</del>		<del>10</del>
19	80	20	59	21	43	22	27	23	8	24
<del>78</del>		<del>77</del>		<del>58</del>		<del>42</del>		<del>26</del>		<del>7</del>
30	75	29	57	28	40	27	24	26	5	25
<del>74</del>		<del>72</del>		<del>55</del>		<del>39</del>		<del>22</del>		<del>3</del>
31	71	32	54	33	37	34	20	35	2	36

Meanders of ----- Pages ----- to -----

Meanders of ----- Pages ----- to -----



1  
Subdivisions of T. 5 South R. 34 E. 61

Willamette Meridian, Oregon.

Preliminary to commencing this survey I ran North on a plank line on East boundary of sec 36 and at 39.97 chs I found the  $\frac{1}{4}$  sec cor. and at 80.00 chs I found the Sec. cor. I then commenced and ran West on a plank line on South boundary of sec 36 and at 40.00 chs I found the  $\frac{1}{4}$  sec cor. and at 79.95 chs I found the Sec. cor. My compass well therefore run the same line as the Exterior boundaries and the chaining practically agrees. Survey commenced October 17<sup>th</sup> 1882 with a Burt's Solar Compass. I commenced at the Standard cor. to sec. 35 & 36 on the South boundary of the township which is a post 4 in sq marked S.C. T. 5 S. R. 34 E on N face, S 36 on E and S 35 on W face, with 1 notch on E & 5 notches



782  
 Subdivision of T. 5 South R. 34 East  
 Willamette Meridian, Oregon.

on Wedge, from which  
 A pine 8 ins. in dia. bears  $N 55^{\circ} E$  28 lks.  
 dist. marked J 5 D R 34 E S 36 B F  
 A pine 12 ins. in dia. bears  $N 59^{\circ} W$  59 lks.  
 dist. marked J 5 D R 34 E S 35 B F  
 Iron

North between Secs. 35 & 36

$Ta. 210^{\circ}$  East

40.00 Set a post 3 ft. long 3 ins. sq. 24 ins.  
 in ground for  $\frac{1}{4}$  sec. cor., marked  
 $\frac{10}{4}$  D. on W. face, from which  
 A pine 14 ins. in dia. bears  $N 28^{\circ} E$  9 lks.  
 dist. marked  $\frac{1}{4}$  S B F

A tambores 18 ins. in dia. bears  $N 54^{\circ} W$   
 13 lks. dist. marked  $\frac{1}{4}$  S B F

62.25 Spring branch 2 lks. wide course  
 $NW$  150 ft. below  $\frac{1}{4}$  sec. cor.

80.00 Set a salt stone 15 x 8 x 5-10 ins.  
 in ground for cor. to sec. 25, 26  
 35 & 36, 120 ft. above Spring  
 branch, marked -

J 5 D R 34 E S 25 on W. E.



780  
 Subdivision of T. 5 South R. 34 East  
 Willamette Meridian, Oregon.

North: Face 2" rate  
 Heavily timbered with pine fir &  
 tamarack 76, 50 chs and undergrowth  
 growth of some kinds of woods  
 October 18<sup>th</sup> - 1882

From the Standard col. to sec.  
 34 or 35 on the South boundary  
 of the township which is a pine tree  
 4 ins. in dia. marked, S. C. F 5 D.  
 R 34 E or W, S 35 or E and  
 S 34 or W. faces, with 2 notches  
 on E or 4 notches on W, faces  
 from which

A tamarack 2.2 ins. in dia. bears  
 N 39° W 3.6 R, dist marked F 5 D  
 R 34 E D 34 B F

A pine 3 ins. in dia. bears N 70° E 22 R,  
 dist marked F 5 D R 34 E D 35 B F

I run

North between Secs. 34 + 35  
 Va. 20° East



Subdivision of T. 5 South R. 34 East

Willamette Meridian, Oregon.

Scale 2" rate.

Heavily timbered with pines & tamarack  
and some undergrowth of some  
kinds of woods

From the Standard cor., to sec 33  
& 34 on the South boundary of the  
Township, which is a post 4 ins. sq.  
marked S. C. T 5 S R 34 E on N.  
S 34 on E and S 33 on W. faces, with  
3 notches on E + W. faces,

from which

A pine 8 ins. in dia. bears  $N 63^{\circ} E 18$  R. dist.  
marked T 5 S R 34 E S 34 B F

A fir 10 ins. in dia. bears  $N 45^{\circ} W 16$  R. dist.  
marked, T 5 S R 34 E S 33 B F

I run

North between Secs. 33 & 34

$T. 5^{\circ}$  East

40,00 Set a post 3 ft. long 3 ins. sq. 24 ins.  
in ground for 4 sec cor.

from which



FINAL OATHS FOR SURVEYS.

856

A list of the names of the individuals employed by Rufus S. Moore, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field notes of the survey of the Subdivisional lines of Town 5 South Range 33 1/2 34 East of Willamette Meridian, Oregon, showing the respective capacities in which they acted :

- James Guttridge, Compassman.
John Guttridge, Chainman.
Joe Parodi, Axeman.
James Guttridge, Chainman.
John Guttridge, Chainman.
Joe Parodi, Axeman.
James Guttridge, Chainman.
John Guttridge, Chainman.
Joe Parodi, Axeman.

FINAL OATHS OF ASSISTANTS

We hereby certify that we assisted Rufus S. Moore, U. S. Deputy Surveyor, in surveying all those parts or portions of the Subdivisional lines of Town 5 South of Range 33 1/2 34 East of the Willamette Meridian, Oregon, as are represented in the foregoing field notes as having been surveyed by him and under his direction ; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- James Guttridge, Compassman.
John Guttridge, Chainman.
Joe Parodi, Axeman.
James Guttridge, Chainman.
John Guttridge, Chainman.
Joe Parodi, Axeman.

Subscribed and sworn to before me, this Twenty First day of November 1882

[SEAL.] Rufus S. Moore Notary Public



## FINAL OATH OF DEPUTY SURVEYOR.

I, Rufus S. Moore  
United States Deputy Surveyor, do solemnly swear that in pursuance of in-

structions received from James G. Tolman

U. S. Surveyor General for Oregon, bearing date of the Twenty Eighth

day of June, 1882, I have well, faithfully and truly, in my own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor General for Oregon, the Surveying Manual, and the laws of the United States, surveying all those

parts or portions of The Subdivisional lines of Township 5 South Range <sup>33 1/2</sup> 34 East of

Willamette Meridian, in the State of Oregon, as are represented in the foregoing Field Notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions, the special written instructions of the U. S. Surveyor General for Oregon, and in the specific manner described in the field notes, and that the foregoing are the *true* field notes of such survey, and should any fraud be detected I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.

Rufus S. Moore  
U. S. Deputy Surveyor.

Subscribed and sworn to before me, this 10th  
day of February, 1883

Benford Robb  
Notary Public



853

**Office U. S. Surveyor General,**

Portland, Oregon, *Feb 1,* 188 *4*

The following Field Notes of the Survey of the  
*Subdivisions of Twp. 5 S.*  
*R. 34 E., Will. Mer., Oregon*

executed by *Refus S. Moore*

under his Contract No. *H 57*, dated *12*

*June,* 188 *2*, having been critically examined, the  
necessary corrections and explanations made, the said field notes  
and the survey they describe, are hereby approved.

*James C. Tolman*  
Surveyor General.

