

ROAD NO  
425

In the Matter of Viewing, Surveying and locating County Road # 425, in Umatilla County, Oregon.

Commencing at a point directly South of the center of main street in the Town of Adams County of Umatilla State of Oregon, and where the center of said main street if prolonged South would intersect the section line between sections four and nine T 3 N R 34 E 20 M. and where the center of the present county road, leading South from the Southern extremity of said main street intersects the said line between the said sections 4 and 9, thence West along said section line, crossing the Wild Horse creek at a point where said section line intersects the meander line of the said Wild horse creek, to the base of the hill skirting the Wild Horse creek; thence in a South westerly direction by the most practicable route to a point immediately South of John Adams wind mill; thence along the Northern bank of said Wild horse creek, following the most practicable route, to a point almost directly North of where the U.P. R.R. Co's track intersects the East line of Smith Alloways place, crossing the Wild horse creek to the North side of the U.P. R.R. Co's track; thence along the North side of the U.P. R.R. Co's track to a point immediately East of where Crawford hollow empties into said Wild horse creek, thence across said Wild horse creek in a westerly direction to intersect the West line of Smith Alloways place at base of North hill; thence in a South westerly direction along the side of said hill to Eastland, thence in a South westerly direction along the down the Wild horse creek canyon on the North side of the U.P. R.R. Co's track to a point of intersection with wagon Road No 374 at the bridge across Wild horse creek on the line running North and South through the center of Section 29 T 3 N R 33 E 20 M. in Umatilla County Oregon. said Road to be forty feet wide.

Viewers Report.

To the Honorable County Court, of the State of Oregon, for Umatilla County:

We the undersigned, the viewers heretofore appointed to view and locate Road # 425 submit the



The following report, Pursuant to an order of the Honorable Court we met Jno L. Arnold County Surveyor at Court House, Pendleton, Oregon on June 12<sup>th</sup> A.D. 1893, and were by him, each duly sworn to faithfully and impartially discharge the duties of our appointments,

We called to our aid Edgar R Thompson } Chainman  
 Wm. McComb } Marker

who were by the Surveyor, each, duly sworn, We viewed, surveyed and located said Road No 425 as specified in our order we find that if properly completed this will be one of the best roads in Umatilla County, being located most of the way on the north side of said Wild Horse Creek, thus securing soil peculiarly adapted to the making of a good thoroughfare, such an one as will need but little repairs when once properly constructed.

With out hesitation we believe it to be a much needed road and one that will accommodate a great many people, being free from abrupt grades and other objectionable features

We think George A. Barnhart is the only one along the route who objects to its location, and in passing over his land we had in view the matter of doing him as little injury as possible.

Aside from the question of damages we recommend that said road (No 425) be declared a public highway

Lat Livermore }  
 O.A. Chapman } Viewers Road Survey No 425

Field Notes of Road Survey 425, Umatilla Co Oregon.

I met Lat Livermore and O.A. Chapman viewers at Court House, June 12<sup>th</sup> 1893, and administer to each, the usual oath, as per law, after which we call E.R. Thompson and Wm. McComb to chain and mark each of whom, duly sworn.

I commence at a point made by extending the center line of main street, in the town of Adams, to intersect line betw secs 4 + 9 T 3 NR 34 E, which point is 813 ft. west of cor to secs 3-4-9-10 in sd Tp. set initial post 20 ft N of line, on E line of main st extended as described, thence I run (from pt of commencing)

West  
 L 40° 00'  
 L 110° 30'  
 L 220° 30'  
 R 120° 51'  
 R 70° 55'  
 R 10° 00'  
 R 20° 50'  
 R 110° 55'  
 L 90° 45'  
 L  
 R  
 L  
 R 20° 00'  
 L 100° 20'  
 L 150° 20'  
 R 20° 14'  
 R 150° 15'



of the  
 its surveyor  
 ad. 1843,  
 and in-  
 its,  
 Rainier  
 river  
 viewed, sur-  
 ved in our  
 his will  
 bring  
 said Wild  
 adapted  
 sh an on  
 properly  
 a much  
 a great  
 rades  
 uly one  
 , and in  
 water  
 eomund  
 highway  
 5-  
 ua 60 Oregon,  
 viewers at  
 each, the  
 E.R. Thom-  
 ark each  
 ending  
 Adams, to  
 rich point  
 sp. set  
 in at enter-  
 commencing

|            |      |   | on line but sees 4 + 9.  | Ja. 20° |
|------------|------|---|--|---------|
| West       | 366  | ↑ |  |         |
| L 40° 00'  | 416  |   | East bank of Wild Horse Creek  |         |
|            | 450  |   | West " " " "   |         |
| L 110° 30' | 496  | ↑ | Ascend from 750 ft. along foot of hill   |         |
| L 220° 30' | 774  | ↑ | Along foot of hill, west side of creek   |         |
| R 17° 51'  | 1172 | ↑ | by large stone about 30 ft west of dry bed of creek                                  |         |
| R 7° 55'   | 1437 | ↑ | No Adams House bears about 20' west of line  |         |
|            | 2200 |   |  |         |
| R 10° 05'  | 2403 | ↑ | pt 108 ft R.R. from center R.R. track in Barley field                                |         |
|            | 2920 |   | N bank of W. H. C.   |         |
| R 20° 53'  | 2976 | ↑ | do " " " " 55 ft from R.R.   |         |
|            | 2990 |   | Put line N + S through center Sec 9 about 500 N of 1/4 sec cor                       |         |
| R 11° 55'  | 3590 | ↑ | About 2 rods from R.R.   |         |
| L 9° 45'   | 3500 | ↑ | A pt 70 N of center R.R. t. course about N 77° 30' E - S 79° 30' W                   |         |
|            |      |   | Thence run on line parallel to R.R. 70' Right  |         |
|            | 3870 |   | Center of lane E. + W. probable E + W 1/2 Sec line Sec 9                             |         |
|            | 5280 |   | Set 1 m S 20' L or 50' from center of R.R. T.  |         |
| L          | 637  | ↑ | Stake in wood purporting to be M. L. bears L. 25'                                    |         |
|            |      |   | do is 40 ft R of center of R.R. T.   |         |
| R          | 707  | ↑ | Branch, runs 20 bridges; do on west side of mouth                                    |         |
|            |      |   | 25 ft R of center of R.R. bridge 20  |         |
| L          | 791  | ↑ | Foot of telegraph pole 70' R of center of R.R. T.                                    |         |
|            |      |   | Thence along line parallel to R.R. 70 ft to R  |         |
|            | 1080 |   | line but Sec 8-9   |         |
| R 20° 00'  | 1300 | ↑ | pt 70' R of R.R. center, leave parallel to R.R.                                      |         |
|            | 1644 |   | S bank of W. H. C.   |         |
|            | 1675 |   | N " " " "  |         |
| L 10° 20'  | 1803 | ↑ | R 7' dist from post in fence wood do   |         |
|            | 2170 |   | N side of creek, line cuts off 1 bunch willows on N                                  |         |
| L 15° 20'  | 2265 | ↑ | on South hill side, above private road   |         |
| R 20° 10'  | 2708 | ↑ | Stone wood do on West face and on S hill side  |         |
|            |      |   | about 125 ft N of creek  |         |
|            | 3200 |   | No Ferguson's house bears S across creek about 100 ft                                |         |
| R 18° 15'  | 3974 | ↑ | pt 70' from R.R. Thence on line parallel to R.R. 70 ft Right                         |         |
|            | 5280 |   | Set 2 m S 50 ft from R.R. or 20 ft left of line                                      |         |
|            | 1240 |   | P.C. in R.R. T about 30' R   |         |
|            | 1520 |   | Bridge # 18 on R.R. bears S 50' distant  |         |
|            | 1700 |   | Wm Blackley's house bears N about 140 ft   |         |
|            | 1900 |   | Center of N + S lane   |         |
|            | 2100 |   | East land Station bears about 40' S of R.R. T at                                     |         |
|            |      |   | pt   |         |
|            | 3100 |   | R.R. switch, P.C. about 40' S - leave parallel to R.R. and continue along hill side. |         |



L 35° 15' 3785 <sup>18</sup> On South hill side, about 120 ft from creek  
 L 48° 00' 4622 <sup>19</sup> " " " " " 150 " " "  
 4420 <sup>20</sup> Pt 70 ft N of R.R.T. in plowed field, about 100' from B16  
 Thence on line parallel to R.R.T.  
 5235 N. S. line through center Dec 18 to N.R. 34 E  
 R 14° 45' 5280 <sup>21</sup> A stone marked <sup>21</sup> on top, 70' R of R.R.T.  
 Set 3 m P, a stone 24 x 15 x 12 ins circle marked N11 N  
 on top, 20 ft R of line, in old stone fence  
 315 Center of Greenwood.  
 L 26° 48' 393 <sup>22</sup> On South hill side about 100 from creek  
 L 26° 10' 1013 <sup>23</sup>  
 R 12° 00' 1480 <sup>24</sup> On South hill side, about 40' R to creek 90' L to RR  
 R 21° 50' 2117 <sup>25</sup> " " " " " 50' L " "  
 Route Rothrocks house bears N about 500' dist  
 R 12° 22' 2689 <sup>26</sup> On South hill side  
 L 5° 34' 2985 <sup>27</sup> In center of private road about 50' R of creek  
 R 12° 35' 3770 <sup>28</sup> N of private R 3' dist and from creek about 100 ft dist  
 4070 Mouth of gulch 25 ft wide course D.  
 L 19° 10' 4424 <sup>19</sup> On S hill side about 50' N of fence  
 5280 Set 4 m P 20 ft N of line in stone mound  
 L 35° 55' 390 <sup>30</sup> On S hill side by large stone - 150' from creek  
 R 17° 30' 1600 <sup>31</sup> By large stone on S hill side 70' R of R.R.T.  
 Thence on line parallel to R.R.T.  
 2190 Mouth of Ravine  
 2320 PC about 30' R  
 3143 Line N. S. bet Brown & Rothrocks  
 R 13° 30' 3800 <sup>32</sup> (R.R.P.T) South hill side 70' R of R.R.T.  
 5280 Set 5 m P a stone 28 x 24 x 20 ins marked VM on S face  
 20 ft N of line  
 L 40° 48' 462 <sup>33</sup> On S hill side, about 100 ft E of road in lawn N. S.  
 500 Frank Brown demands a stone culvert  
 630 New line N. S. through center Dec 20 to N.R. 33 E  
 R 9° 00' 2345 <sup>34</sup> L of private road near R bank of creek  
 2420 Center W.H.C. 10' wide  
 2552 Wheat Ware House at Kavana bears 28 S  
 3200 Center of W.H.C. 30' wide needs bridge  
 3992 A stone marked M. 6. on S face bears R of line  
 4108 Line bet Dec. 22 + 23 center Geo Barnharts land  
 Tuesday June 13. 1893  
 R 10° 30' 4400 <sup>35</sup> On S hill side about 100' N. of creek  
 5280 Set 6 m P 20' S of line

R 3° 15'  
 R 15° 40'  
 R 27° 30'  
 R 5° 30'

L 9° 00'  
 L 22° 10'  
 L 19° 30'

L 10° 35'

R 14° 35'

L 14° 00'

L 35° 30'

L 8° 05'

R 19° 00'

R 21° 00'

L 5° 05'

R 9° 00'



|            |      |    |   |
|------------|------|----|---|
| R 30° 15'  | 138  | 36 | On S hill side 25ft from creek  |
| R 15° 40'  | 400  | 37 | " " " " " " " " " " " "   |
| R 27° 30'  | 700  | 38 | " " " " " " " " " " " "   |
| R 5° 30'   | 1062 | 39 | On S hill side about 60 " "   |
|            | 2110 |    | Stake culvert, recommended by viewers   |
| L 9° 00'   | 2374 | 40 |   |
| L 22° 10'  | 2867 | 41 | On S north hill side  |
| L 10° 30'  | 3547 | 42 | Mound on S hill side about 150' R from creek                                  |
|            | 4200 |    | M' Laurer house barn across creek about 250' E                                |
|            | 4520 |    | Line bet Secs 21-22   |
| L 10° 35'  | 4693 | 43 | 2 ft N of private road  |
|            | 5296 |    | Set 7 m. P., stone of about 4000 Cu lbs, 30ft south of line used 7m on N face |
| R 14° 30'  | 101  | 44 |   |
|            | 450  |    | Geo Barnhart's house barn about 125' R of line                                |
|            | 700  |    | Mouth of Barnhart-Creek   |
| L 140° 00' | 835  | 45 | About 10' West of private Road  |
| L 35° 30'  | 2023 | 46 | " " " " " " " " " "   |
|            | 2290 |    | line bet Secs 21 + 28   |
| L 8° 05'   | 2335 | 47 | Center of private Road about 20' R of creek                                   |
| R 19° 00'  | 2558 | 48 | 2 ft E " " " " " " " " " "  |
| R 21° 00'  | 2915 | 49 | Center of " " " " " " " " " "   |
|            | 3815 |    | Center of one branch of creek about 30' wide                                  |
| L 5° 08'   | 3840 | 50 | on S side of Thorn bush on line   |
| R 9° 00'   | 4183 | 51 | a pt 70' R of center of R.R.T.  |
|            |      |    | Thru on line parallel to R.R.T. 170' right                                    |
|            | 5280 |    | Set 8 m. P. 70' R of center of R.R.T. in field                                |
|            | 807  |    | line bet Secs 8 + 9 & sec cor in creek about 300' E                           |
|            | 2400 |    | Saxe Station  |
|            | 4100 |    | Mouth of Creek with wood bridge   |
|            | 4100 |    | But Road 274 in low N+S through center sec 29                                 |
|            |      |    | Set Terminal post 45' NE of P.O.  |


All the posts used are of equal size and properly marked and set in mounds

I hereby certify that the foregoing are the true and original notes of Road Survey No 425 from the town of Adams to Saxe Station on for Unative bounty Oregon

Jno C Arnold Co Sur



No. 425-

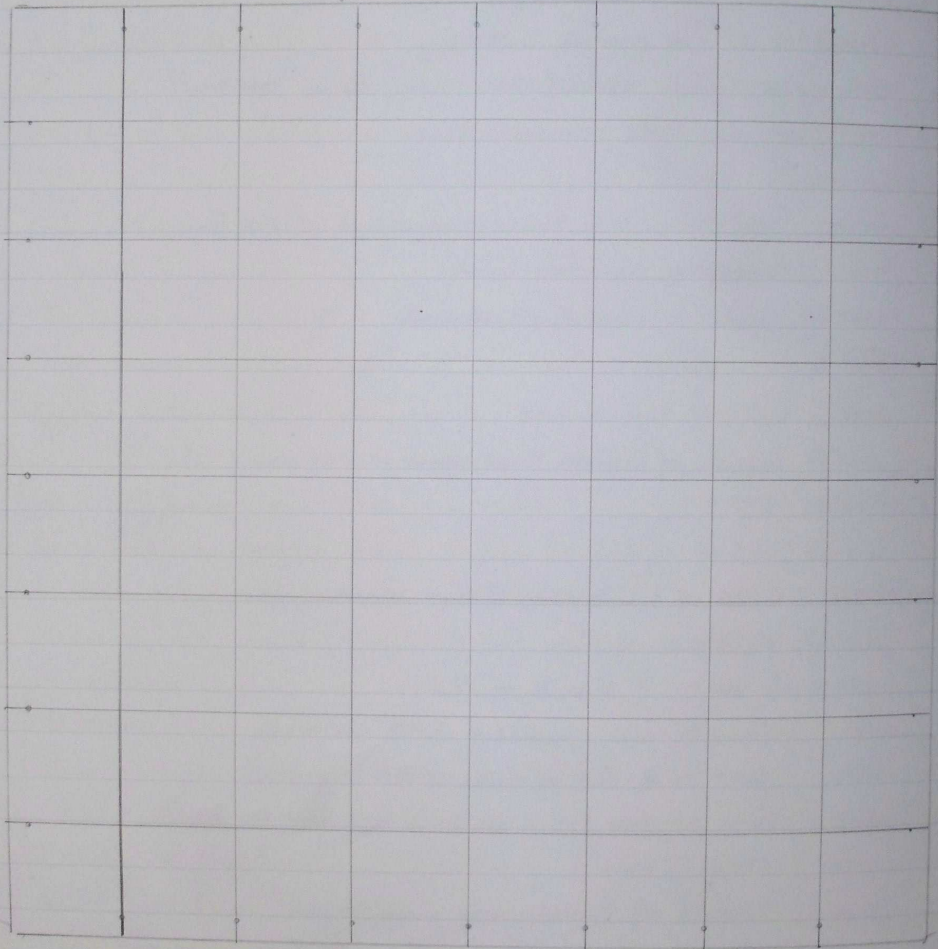

Mar 13 1894 J 102

ROAD No  
437.

Com  
of the  
in the  
cont  
feet  
west  
east  
Mil  
line  
dist  
the b  
bou  
to b

To

Me  
locat  
order  
at T  
1894.  
dist  
S. T  
sw

In

In  
of M  
for the

Me  
view  
of M  
Mil  
a. m.  
order