

RECEIVED

APR 18 1997

9:00 AM

UMATILLA COUNTY RECORDS

IN THE BOARD OF COUNTY COMMISSIONERS OF UMATILLA COUNTY STATE OF OREGON

**IN THE MATTER OF LEGALIZATION)
OF A PORTION OF CANAL ROAD,)
COUNTY ROAD NO. 1203)**

ORDER NO. RD97-13

WHEREAS, the Umatilla County Board of Commissioners may, under authority of ORS 368.201 to 368.221, order a county road that has been used and traveled by the public for ten (10) years or more to be surveyed, and

WHEREAS, the Umatilla County Board of Commissioners ordered the survey of that portion of Canal Road (County Road No. 1203) described as follows:

A strip of land for road purposes lying in Sections 5,6,7, and 8, Township 4 North, Range 29 East W. M. being 66 feet in width and lying 33 feet on each side of the following described centerline:

Commencing at a brass-capped monument marking the ¼ Corner common to Sections 5 and 6, Township 4 North, Range 29 E.W.M.; thence South 00 Degrees 14 Minutes 31 Seconds West, 1324.39 feet along the east line of the Southeast ¼ of Section 6 to the South 1/16 Corner common to said Sections 5 and 6 and the true point of beginning of this description; thence South 00 Degrees 14 Minutes 31 Seconds West, 371.97 feet; thence 116.88 feet along a 209.96-foot radius curve left (the long chord bears South 15 Degrees 42 Minutes 22 Seconds East, 115.38 feet); thence South 31 Degrees 39 Minutes 16 Seconds East, 254.42 feet; thence 75.03 feet along an 87.39-foot radius curve right (the long chord bears South 07 Degrees 03 Minutes 37 Seconds East, 72.74 feet); thence South 17 Degrees 32 Minutes 02 Seconds West, 489.99 feet; thence 198.47 feet along a 655.76-foot radius curve left (the long chord bears South 08 Degrees 51 Minutes 48 Seconds West, 197.71 feet) to a 5/8-inch iron pin that bears South 00 Degrees 11 Minutes 34 Seconds West, 110.00 feet from a brass-capped monument marking the corner common to Sections 5,6,7, and 8, T. 4 N., R. 29 E.W.M. and there terminating.

WHEREAS, the Notice of Hearing was posted and all owners of abutting property affected by the legalization procedure were served copies of the Notice of Hearing, and

WHEREAS, the Umatilla County Board of Commissioners on April 18, 1997, held a public hearing and found it to be in the public's best interest to legalize the road:

THEREFORE IT IS NOW ORDERED that the survey of Canal Road, County Road No. 1203, be recorded by the County Surveyor, and that the road be legalized as described above.


Dated this 18th day of April, 1997

UMATILLA COUNTY BOARD OF COMMISSIONERS

William S. Hansell
William S. Hansell, Chairman

Emile M. Holeman
Emile Holeman, Commissioner

Dennis Doherty
Dennis Doherty, Commissioner

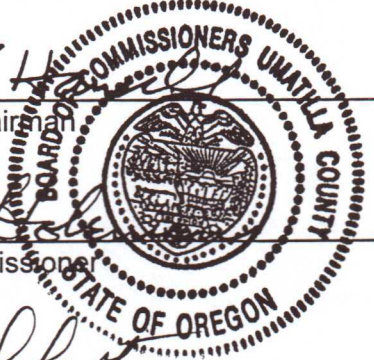

ATTEST: OFFICE OF COUNTY CLERK

By: Jean Thompson
Records Officer



APPROVED AS TO FORM:

William C. Jones
William Jones, County Counsel