

**OREGON CORNER RESTORATION FORM**

Section 30 Township 1N Range 33E  
County Umatilla Date: July 2, 2009


Corner Designation: 1N33S1  Condition Report Only  
Not found  
Remonumented  
Unrecorded  
Surveyed in  
Referenced out

North 1/16th on the west line of section 30, T1N, R33E,  
W.M., Umatilla County, Oregon

Previous Renewals / Surveys, etc.  
The corner was originally set by James Currin and James Noland under Special Instructions dated May 4, 1887. Their record states: Deposit charred stake 12 ins. in the ground and raised a mound of earth over it. Lincoln Wilkes in the 1917 survey of the Diminished Indian Reservation states: Set and iron post 3 ft. long, 2 ins. diam. for 1/16th sec. cor. with brass cap.

Monument and Accessories found: ( condition and source )  
I found the brass cap by Wilkes 24 inches below the surface of a plowed field.

**DIAGRAM**

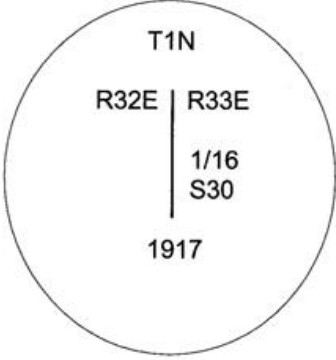

**SKETCH**

MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)  
I left the monument by Wilkes in place and undisturbed. I set a steel guard post 1 foot north of the cap.

For references:

The monument was tied using a Trimble R7/R8 RTK GPS system.

Location and comments  
NAD 83/1991 State Plane Coordinate  
Oregon North Zone  
N=688,078.96 ift  
E=8,651,532.44 ift

Compass Declination  
  
Firm / Agency  
Witness Tree Surveying  
Address  
P.O. Box G  
Pilot Rock, Or. 97868  
Party Chief  
Stephen K, Haddock

Surveyors Seal

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Stephen K. Haddock*

OREGON  
JULY 9, 2001  
STEPHEN K. HADDOCK  
56295LS

RENEWAL DATE 6-30-11

RECEIVED BY:  
Umatilla County Surveyor  
Date: 6-10  
Rec'd By: KK  
No. 10-93-C