

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

V - 17
DIAGRAM

History of original corner establishment:

The original corner was established by George S. Pershin on September 4, 1878, under GLO contract No. 293, as follows:

Set stone, 16" x 10" x 5", on level for corner to sections 26, 27, 34 and 35. Dug pits and drove a pine stake as per instructions.

T2S R30E
S27|S26
S34|S35
PLS 1636
2002

Original corner evidence recovered:

Found the original corner stone solidly set on the west edge of a mound of stones. The original pine post is gone. No pits are in evidence. The corner stone is 19" x 10" x 8" and is marked with five notches on the north edge and two notches on the east edge.

Monument and accessories established to perpetuate the original position of this corner:

In place of the original corner stone, I set a 1" x 30" flared, galvanized iron pipe 15" into the ground to bedrock. A 2 1/2" brass cap attached to the top of the pipe is marked as shown in the diagram above. I place the corner stone horizontally alongside the west side of the pipe and build a mound of stones around the corner stone and the pipe, from which:

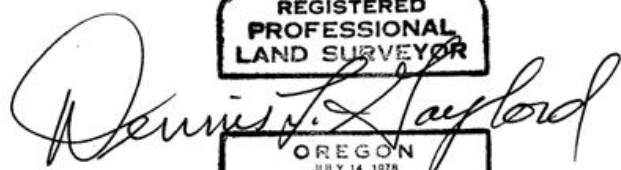
A 5/8" x 24" iron rod set 23" into the ground with a 3/4" brass washer, marked "PLS 1636 26", attached at ground level, bears N56° 30' E, 99.9 feet.

A 5/8" x 24" iron rod set 22" into the ground with a 3/4" brass washer, marked "PLS 1636 35", attached at ground level, bears S39° E, 143.6 feet.

A 5/8" x 24" iron rod set 23" into the ground with a 3/4" brass washer, marked "PLS 1636 34", attached at ground level, bears S35° W, 146.0 feet.

A 5/8" x 24" iron rod set 21" into the ground with a 3/4" brass washer, marked "PLS 1636 27", attached at ground level, bears N46° 30' W, 118.5 feet.

I hereby certify this corner point was perpetuated as hereon described on January 28, 2002. Magnetic declination set in compass: 18° E.


REGISTERED
PROFESSIONAL
LAND SURVEYOR
OREGON
JULY 14, 1978
DENNIS L. GAYLORD
1636

Renews June 30, 2003

Recorded at the office of County Surveyor, County of Umatilla, State of Oregon, on: _____

RECEIVED BY
Umatilla County Surveyor
Date 2-02
Record by KR
No. 02-39-R