

OREGON CORNER RESTORATION FORM

Section 28 Township 2S Range 32E
 County Umatilla Date: April 5, 2007

Corner Designation: 2S32V11

Condition Report Only
 Not found
 Remonumented
 Unrecorded
 Surveyed in
 Referenced out

Quarter corner common to sections 28 and 33, T2S, R32E, W.M., Umatilla County, Oregon.


Previous Renewals / Surveys, etc.

Corner originally set by Daniel Chaplin under contract No. 107 dated September 21, 1864. His record reads: Set stone, 16 x 8 x 8, for 1/4 sec. Cor. The corner was re-established by John Arnold in his completion survey under contract No. 551 dated March 19, 1890. His record reads: Set basalt stone, 16 x 12 x 6 ins., 8 ins. in ground for 1/4 sec.cor., marked 1/4 on N. face, raised mound of stone, 2 ft. high x 4 ft. base over cor., pits impracticable. No traces of any other cor. at this place.

Monument and Accessories found: (condition and source)


I found the record stone in what appeared to be a mound at the toe of a talus slope. The mound is at the top of an apparent land slide area.

DIAGRAM



⊕ = Brass Cap
 • = Rebar Reference

SKETCH

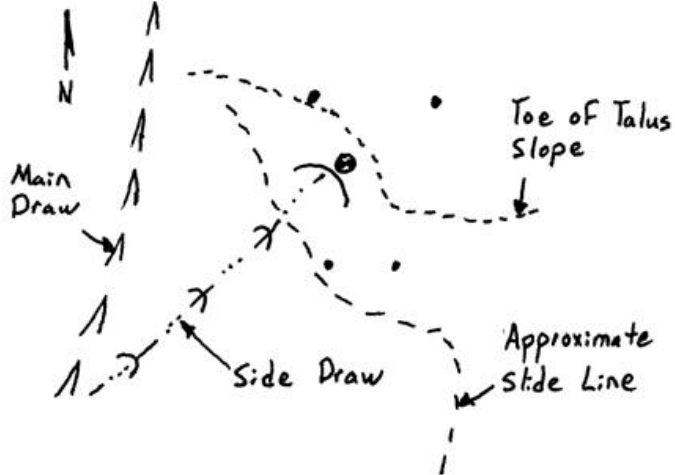

MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)

At the position of the original stone I set a 1 1/2" x 30" galvanized iron pipe with a 2 1/4" brass cap attached stamped as shown in the diagram above. I buried the original stone along side.

For references, I set four 5/8" by 24" rebars with 1.25" orange plastic caps stamped WTS and 56295LS as described below:

- an iron rebar bears N55°02'02"E, 72.75 feet;
- an iron rebar bears N47°41'57"W, 28.92 feet;
- an iron rebar bears S12°57'30"W, 89.96 feet;
- an iron rebar bears S44°30'01"E, 36.29 feet;

The monument and references were tied using a Trimble R7/R8 RTK GPS.

Location and comments

Compass Declination

Surveyors Seal

RECEIVED BY:
Umatilla County Surveyor
 Date: 6-07
 Rec'd By: KF
 No. 07-169-C

Firm / Agency
 Witness Tree Surveying
 Address
 P.O. Box G
 Pilot Rock, Or. 97868
 Party Chief
 Stephen K, Haddock

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Stephen K. Haddock

OREGON
 JULY 9, 2001
 STEPHEN K. HADDOCK
 56295LS

RENEWAL DATE 6-30-07