

OREGON CORNER RESTORATION FORM

COUNTY: Umatilla DATE: 5/5/15

CORNER DESIGNATION: The Northwest Corner of Section 8, Township 3 North, Range 31 East, E-5.

PREVIOUS RENEWALS/SURVEYS ETC.: Corner originally established by D.S. Payne, under Contract No. 100, dated 8/1/1861, notes state: Set charred stake with mound trench and pits as per instructions for corner to secs 5, 6, 7 & 8.

MONUMENT AND ACCESSORIES FOUND: None

MONUMENT MARKING DETAIL:

T4N R31E
S6|S5
S7|S8
T3N
2015
PLS 54657

MONUMENT SET: I reestablished this corner by proportioning latitude between the West one-quarter corners of Sections 5 and 17, using the Payne record and shifting due East to the old North-South field berm for departure. At the reestablished corner point, set a 2 3/8" brass cap on 1 1/4 by 30" galvanized iron pipe with top 20" below ground level, stamped as shown in "Monument Marking Detail".

From which:

- A silver deep-1 magnet, buried 20" in the ground, bears North 49° East, 30.6 feet.
 - A pink deep-1 magnet, buried 20" in the ground, bears South 39° East, 32.1 feet.
 - A blue deep-1 magnet, buried 20" in the ground, bears South 50° West, 33.5 feet.
 - An orange deep-1 magnet, buried 20" in the ground, bears North 47° West, 35.7 feet.
- Buried bearing object tags with magnets.

LOCATION AND COMMENTS: Corner located in CRP field in an old North-South field berm.


OREGON STATE PLANE COORDINATE, North Zone, NAD 83(91), International Feet:

N = 767911.56
E = 8591477.15

FIRM: Wells Surveying
P.O. Box 1696
Pendleton, OR 97801

COMPASS DECLINATION: 18° East Surveyor's Seal
Witnesses: Jason Wells, PLS
Dean Roy

/3N31E5

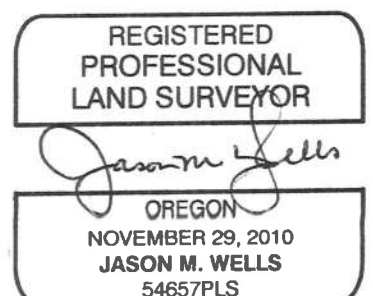

RENEWS: 6-30-16

15-052-c