

**OREGON CORNER RESTORATION FORM**

COUNTY: Umatilla DATE: 07/09/13

CORNER DESIGNATION: 3N32, A21, The Northwest Corner of Section 1.

PREVIOUS RENEWALS/SURVEYS ETC.: Corner originally established by David Thompson, under GLO Contract 106, dated August 1864, notes state: Set post for corner to Secs. 1, 2, 35, 36 in mound of Earth with charred stake, pits, trench, &c as per instructions.

MONUMENT AND ACCESSORIES FOUND: None.

MONUMENT MARKING DETAIL:

T4N R32E  
S35|S36  
S2 | S1  
T3N  
2013  
PLS 54657

MONUMENT SET: Held intersection of the centerlines of Campbell Road North and South and Midway Road East and West as best remaining evidence of the original corner position. Old County Road notes also confirm the intersection as the corner point. At reestablished corner point, set a 2 3/8" brass cap on a 1 1/4" x 30" galvanized iron pipe, 8" below road surface, stamped as stated in "Monument Marking Detail", from which:

A 5/8" x 24" iron rod with a 1 1/4" purple plastic cap stamped "Wells Surveying, PLS 54756" bears North 46° East, 57.7 feet.

A 5/8" x 24" iron rod with a 1 1/4" purple plastic cap stamped "Wells Surveying, PLS 54756" bears South 25 1/2° West, 51.6 feet.

A 5/8" x 24" iron rod with a 1 1/4" purple plastic cap stamped "Wells Surveying, PLS 54756" bears South 37° East, 36.7 feet.

A 5/8" x 24" iron rod with a 1 1/4" purple plastic cap stamped "Wells Surveying, PLS 54756" bears North 75 1/2° West, 76.1 feet.

Attached bearing object signs to all accessories.

LOCATION AND COMMENTS:

At road centerline intersection with Campbell Road North and South and Midway Road East and West.

OREGON STATE PLANE COORDINATE, North Zone, NAD 83(91), International Feet:

N= 773810.44'  
E= 8644476.33'


FIRM: Wells Surveying  
P.O. Box 1696  
Pendleton, OR 97801

COMPASS DECLINATION: 18° East

Surveyor's Seal

Witnesses: Jason Wells, PLS  
Dean Roy

\3N32A21

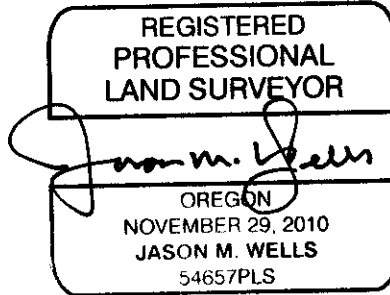

RENEWS: 6-30-14