

# OREGON CORNER RESTORATION FORM

COUNTY: Umatilla DATE: 08/19/13

CORNER DESIGNATION: 3N32, E07, The North Quarter Corner of Section 8.

PREVIOUS RENEWALS/SURVEYS ETC.: Corner originally established by David Chaplin, under Contract 107, dated September 1864, notes state: Set post for 1/4 Sec. cor. in mound of Earth with charred stake pits & c as per instructions.

MONUMENT AND ACCESSORIES FOUND: None.

## MONUMENT MARKING DETAIL:

T3N R32E  
1 S5  
4 S8  
2013  
PLS 54657

MONUMENT SET: Held the intersection of the centerline of Westersund Road North-South and a field berm extending West as the best remaining evidence of the original corner location and set a 2 3/8" brass cap on a 1 1/4" x 30" galvanized iron pipe with top 12" below road surface, marked as shown in "Monument Marking Detail", from which:

A 5/8" x 24" iron rod with a 1 1/4" purple plastic cap stamped "Wells Surveying, PLS 54657", in road bank bears North 24° East, 30.7 feet.

A 5/8" x 24" iron rod with a 1 1/4" purple plastic cap stamped "Wells Surveying, PLS 54657", in road bank bears South 22° East, 32.1 feet.

A blue deep-1 magnet, buried 20" in the ground, bears South 35° West, 51.2 feet.

A 5/8" x 30" iron rod with a purple plastic cap stamped "Wells Surveying, PLS 54657", bears South 78 1/2° West, 16.5 feet.

Attached witness post sign to railroad tie by this rebar. Bearing object tags buried with the magnet and attached to rebar.

LOCATION AND COMMENTS: Located at the intersection of Westersund Road and a field berm West.

OREGON STATE PLANE COORDINATE, North Zone, NAD 83(91), International Feet:


N= 768067.34'  
E= 8626069.01'

FIRM: Wells Surveying  
P.O. Box 1696  
Pendleton, OR 97801

COMPASS DECLINATION: 18° East

Surveyor's Seal

Witnesses: Jason Wells, PLS  
Dean Roy  
3N32E07

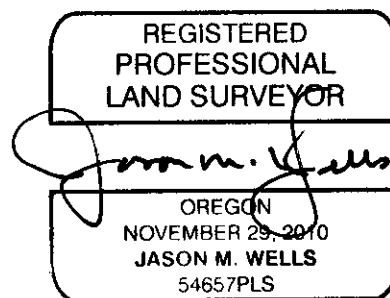

RENEWS: 6-30-14