

OREGON CORNER RESTORATION FORM

COUNTY: Umatilla DATE: 08/13/13

CORNER DESIGNATION: 3N32, P17, The West One-Quarter Corner of Section 23.

PREVIOUS RENEWALS/SURVEYS ETC.: Corner originally established by David Chaplin, under Contract 107, dated September 1864, notes state: Set post for 1/4 Sec. cor. in mound of Earth with charred stake pits & c as per instructions.

MONUMENT AND ACCESSORIES FOUND: None.

MONUMENT MARKING DETAIL:

T3N R32E
1/4
S22 | S23
2013
PLS 54657

MONUMENT SET: Held the intersection of a large field berm East and a small field berm North as the best remaining evidence of the original corner position and set a 2 3/8" brass cap on 1 1/4" x 30" galvanized iron pipe with top 20" below ground surface, marked as shown in "Monument Marking Detail", from which:

A silver deep-1 magnet buried 20" below ground, bears North 57 1/2° East, 36.7 feet.

A pink deep-1 magnet buried 20" below ground bears South 45 1/2° East, 43.3 feet.

A blue deep-1 magnet buried 20" below ground, bears South 52 1/2° West, 59.7 feet.

An orange deep-1 magnet buried 20" below ground, bears North 46 1/2° West, 26.8 feet.

Buried bearing object tags with magnets.

LOCATION AND COMMENTS: At the intersection of field berms North and East, and the projection of a field berm West.

OREGON STATE PLANE COORDINATE, North Zone, NAD 83(91), International Feet:


N= 755151.66'
E= 8639605.67'

FIRM: Wells Surveying
P.O. Box 1696
Pendleton, OR 97801

COMPASS DECLINATION: 18° East

Surveyor's Seal

Witnesses: Jason Wells, PLS
Dean Roy
3N32P17

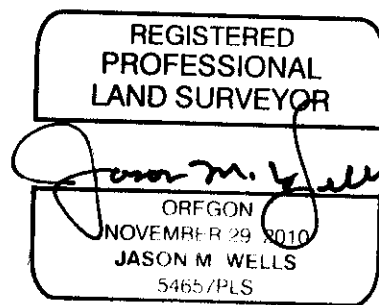

RENEWS: 6-30-14