

OREGON CORNER RESTORATION FORM

Section: 36, 31
County: Umatilla

Township: 3N
Date: 10/31/2011

Range: 33E, 34E

Corner Designation: 3N33X25

Quarter corner common to Sections 36, T3NR33E; 31, T3NR34E.

<input checked="" type="checkbox"/>	Condition Report Only
<input type="checkbox"/>	Not Found
<input type="checkbox"/>	Remonumented
<input type="checkbox"/>	Unrecorded
<input type="checkbox"/>	Surveyed In
<input checked="" type="checkbox"/>	Referenced Out


Previous Renewals / Surveys, etc.

Originally surveyed by Thompson in 1864. He set a post in a mound of earth with charred stake, pits, and trench.
In 1871 Moody set a post in a mound of earth.
In 1971 Krumbain set a brass cap in Survey 03-295-B.

Monuments and Accessories Found: (Condition and Source):

A 2 1/2" brass cap, stamped as shown below, 1.0' below the surface.


Diagram



ORANGE
MAGNET ●

BLUE
MAGNET ●

Sketch

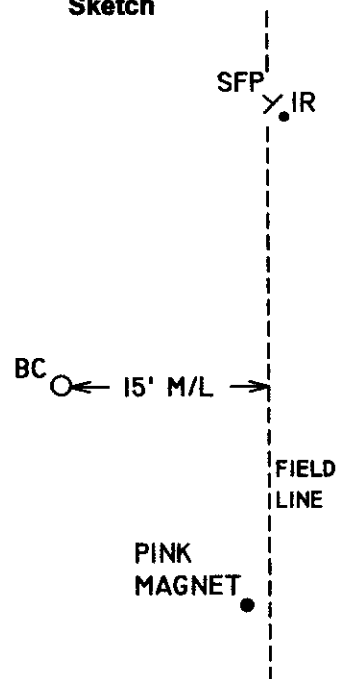

PINK
MAGNET ●

NAD 83/91
OREGON STATE PLANE NORTH
INTERNATIONAL FEET

N745407.42
E8682018.32

Monument(s) Set (Procedures and Description):

None.

References Set:

"Deep One" magnets by Berntsen.
An orange magnet lies N 38° 50' W, 17.78', 1.5' deep.
A 5/8" x 30" iron rebar lies N 31° 10' E, 36.13'.
A pink magnet lies S 38° 50' E, 29.93', 1.4' deep.
A blue magnet lies S 37° 50' W, 26.89', 1.5' deep.

Location and Comments:

The corner is located 1/2 mile South and 1 mile West of the intersection of Duff Rd. and Rothrock Rd.

Compass Declination

17° E

Surveyors Seal

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. English
OREGON
JANUARY 11, 2005
ROBERT DOUGLAS ENGLISH
43406LS

RENEWAL DATE: 12/31/13

RECEIVED BY:

Date: 7/10/2012
Rec'd By: J. Oles
No. 12-094-C

Firm / Agency

Survey One, LLC.
P.O. Box 382
Pendleton, OR 97801
(541) 276-2055