

OREGON CORNER RESTORATION FORM

COUNTY: Umatilla

DATE: October 6, 2005

CORNER DESIGNATION: E-1 Northwest Corner Section 7, T. 4 North, Range 29 E.W.M.


PREVIOUS RENEWALS/SURVEYS ETC.

William Campbell set a post in mound of earth with trench and pits (Contract No. 95, dated September 19, 1860).

In 1980, Krumbein set a brass cap in his remonumentation survey for Umatilla County, Survey No. S-156-C.

MONUMENT AND ACCESSORIES FOUND:

Found Krumbein's brass cap approximately 1 foot below the gravel intersection of Ott and Hooker Roads. Monument was tied before road reconstruction and is now approximately 16 inches below the pavement of a newly paved intersection.

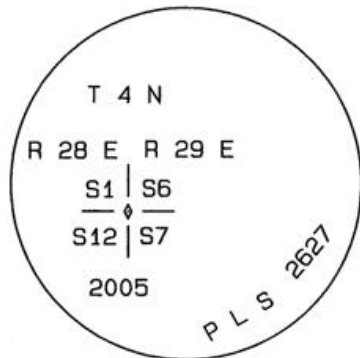

MONUMENT SET (PROCEDURES AND DESCRIPTION):

Made GPS tie to corner prior to road construction. Set a 2" aluminum cap on 5/8" X 12" steel rebar marked as shown above 1/2" below the surface of the pavement.

NEW ACCESSORIES:

None. Accessories shown on restoration form for this corner, Survey No. 03-52-G, are still intact.

LOCATION AND COMMENTS:

Corner is at the intersection of Ott and Hooker Roads.

COMPASS DECLINATION:

N/A

FIRM/AGENCY:

Umatilla County Road Dept.
3920 Westgate
Pendleton, Oregon 97801

PARTY CHIEF:

Gary Roberts

NOTES:

WITNESS:

SURVEYOR'S SEAL

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gary R. Roberts
OREGON
JULY 30, 1993
GARY R. ROBERTS
2627

RECEIVED BY

Umatilla County Surveyor

Date 10-05

Rec'd By GR

No. 05-177-R

RENEWS 12/31/06