

OREGON CORNER RESTORATION FORM

SECTION 23 TOWNSHIP 4 NORTH RANGE 29 EAST R-19
COUNTY : UMATILLA DATE 8-98

CORNER DESIGNATION

SOUTH 1/4

CONDITION REPORT ONLY
 NOT FOUND
 RENEWED
 UNCOVERED
 SURVEYED IN
 REFERENCED

PREVIOUS RENEWALS / SURVEYS, ETC.


ORIGINALLY SURVEYED IN 1861 BY DAVENPORT UNDER CONTRACT #101. HE SET A POST IN A MOUND OF EARTH AND A CHARRED STAKE. ASHER FOUND 5/8" IRON REBAR IN 1967.

MONUMENTS AND ACCESSORIES FOUND: CONDITION AND SOURCE

5/8" IRON REBAR 2" BELOW THE SURFACE OF A PAVED ROAD.

SKETCH

MONUMENT DETAIL

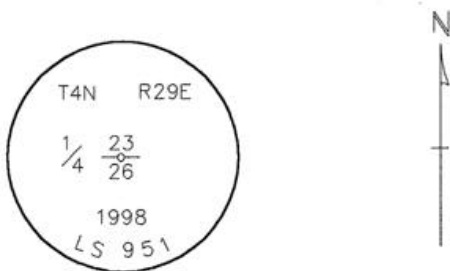

MONUMENT SET (PROCEDURES AND DESCRIPTION)

I PLACED A 2" ALUMINUM CAP ON THE REBAR STAMPED AS ABOVE.

NEW ACCESSORIES FROM WHICH

AN ALUMINUM TAG #951 IN A RXR TIE FENCE POST LIES N 44°.18'00" E, 30.31 FEET.
AN ALUMINUM TAG #951 ON A POWER POLE LIES S 78°.59'00" E, 86.88 FEET.
AN ALUMINUM TAG #951 ON A POWER POLE LIES S 25°.39'00" E, 50.59 FEET.
AN ALUMINUM TAG #951 ON A POWER POLE LIES S 84°.02'30" W, 162.44 FEET.

LOCATION AND COMMENTS

AT THE INTERSECTION OF LOOP ROAD AND FEEDVILLE ROAD.

COMPASS DEC.

SURVEYOR'S SEAL

FIRM/AGENCY

EDWARDS SURVEYING
P.O. BOX 763
HERMISTON, OREGON 97838
97838

PARTY CHIEF

D. EDWARDS

NOTES

WITNESS

RICK SMITH

RECEIVED BY

Umatilla County Surveyor

Date 10-98

Rec'd By KS

No. 98-213-C

REGISTERED
PROFESSIONAL
LAND SURVEYOR

G. Dennis Edwards

OREGON
JULY 16, 1971
G. DENNIS EDWARDS
951

RENEWS 12/31/99