

OREGON CORNER RESTORATION FORM

COUNTY: Umatilla DATE: 07/15/13

CORNER DESIGNATION: 3N32, A07, The North One-Quarter Corner of Section 5.

PREVIOUS RENEWALS/SURVEYS ETC.: Corner originally established by David Thompson, under GLO Contract 106, dated August 1864, notes state: Set post for 1/4 Sec. corner in mound of Earth with charred stake, pits, trench &c as per instructions.

MONUMENT AND ACCESSORIES FOUND: None.

MONUMENT MARKING DETAIL:

T4N R32E
1 S32
4 S5
T3N
2013
PLS 54657

MONUMENT SET: Held the intersection of centerlines of Missouri Gulch Road and Westersund Road as best remaining evidence of the original position. At reestablished corner point, set a 2 3/8" brass cap on a 1 1/4" x 30" galvanized iron pipe, with cap 10 inches below ground level, stamped as stated in "Monument Marking Detail", from which:

A 3/4" brass washer stamped "PLS 1106" 1.0 feet above ground level in guy pole bears North 53° East, 29.7 feet.

A 3/4" brass washer stamped "PLS 1106" 1.0 feet above ground level in UECA power pole #055901 bears South 39° East, 37.8 feet.

A 3/4" brass washer stamped "PLS 1106" 1.0 feet above ground level in guy pole bears South 29° West, 33.8 feet.

A 5/8" x 24" iron rod with a 1 1/4" purple plastic cap stamped "Wells Surveying, PLS 54657" bears North 37° West, 23.7 feet.

Attached bearing object signs to all accessories.

LOCATION AND COMMENTS: At intersection of Missouri Gulch Road and Westersund Road.

OREGON STATE PLANE COORDINATE, North Zone, NAD 83(91), International Feet:

N= 773394.26'

E= 8625941.83'


FIRM: Wells Surveying
P.O. Box 1696
Pendleton, OR 97801

COMPASS DECLINATION: 18° East

Surveyor's Seal

Witnesses: Jason Wells, PLS
Dean Roy

\3N32A07

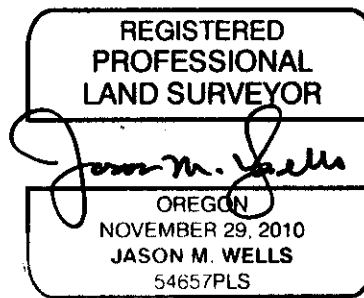

RENEWS: 6-30-14