


Index File No. P-24
 T. 45 R. 30E
 Merid. Willamette

CORNER RECORD (SEARCH)
 (Ref. FSM 7151.4)

Tract or Survey No. _____
 County Umatilla
 State Oregon
 Cor. No. _____

R.D. Ukiah
 N.F. Umatilla

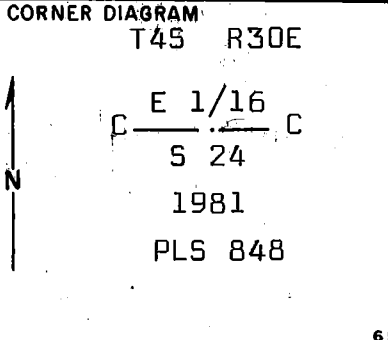

DESCRIBE CORNER MONUMENT FOUND

Corner not previously established.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

N/A

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner on flat ground in open pine timber.
 Primitive road approx. 300 ft. North and
 500 ft. South from corner.

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
Agency

Signature [Handwritten Signature] Title PLS 848 Division _____ Headquarters Mt. Vernon, OR Date 8/13/81 7100-52-(3-68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 3"x30" iron pipe with 3" brass cap stamped as shown on the diagram. Set pipe 15 inches in the ground and raised a mound of stone around the pipe.

From which:

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A pine 12 inches dia. bears N23°E, 107.4 ft. scribed CE 1/16 S 24 BT.
A pine 12 inches dia. bears S1°W, 41.5 ft. scribed CE 1/16 S 24 BT.
Set steel posts with warning and boundary sign 5 ft. South and 5 ft. East from corner.
Nailed bearing tree signs and brass washers stamped PLS 848 to each tree.
Painted red band around each tree.

Work Done By D.M. Ferguson Title Surveyor Date 8/13/81 State Registration No. OR PLS 848
or Agency

Certified Cor. Record Prepared? Yes No Filed At: Umatilla Co. Surveyor Off. Date

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

REMARKS

Witnesses to above corner:

D. Mitchell Ferguson
Mike Woodward