

Index
File No.


CORNER RECORD (SEARCH)
(Ref. FSM 5151.4)

Tract or Survey No. **North Fork John Dav Unit** Cor. No. **AP-532**

T. 6 S. R. 34 E.
Merid. Willamette

R.D. North Fork John Day County Umatilla
N.F. Umatilla State Oregon

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

Found a 5/8" rebar, with a 3 1/4" aluminum cap, projecting 4" out of a small creek bed.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

9" Englemann Spruce Snag, N. 22 1/2 E., 17.3 feet, with burnt out double blaze.
22" Englemann Spruce Snag, N. 42 W., 28.3 feet, with burnt out double blaze.

PHOTO IDENTIFICATION DATA

Photo No.
Filed At.
Object Ident.
Ident. By

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

From the junction of roads 52 and 5507 travel southeasterly on 52 approximately 0.41 miles. Then walk southerly approximately 200 feet to the head of an unnamed creek. Follow the unnamed creek downstream approximately 2500 feet to the corner which is set in the creek.

PLANE COORDINATE POSITION DATA

State: Zone:
X:
Y:
Datum:

Signature
D. Schlaich

Title
Land Surveyor

Division

Headquarters
S.O.

Date
10/21/1997

FS-7100-52 (3/97)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

RM, 5/8" X 24" rebar with red plastic cap stamped "UMATILLA N.F.", set 18" in the ground, S. 46 1/4 E., 26.4 feet.
RM, 5/8" X 24" rebar with red plastic cap stamped "UMATILLA N.F.", set 23" in the ground, S. 24 W., 20.3 feet.

Work Done By D. Schlaich

Title Land Surveyor

Date 10/21/1997

State Registration No.
or Agency _____

Certified Corner Record Prepared ?

Yes


No

Filed At: _____

Date _____

REMARKS

Index
 File No. T. 6 S. R. 34 E. Merid. WILLAMETTE
 CORNER RECORD (SEARCH)
 (Ref. FSM 7151.4)
 R.D. NFJD N.F. UMATILLA
 County UMATILLA State OREGON
 Tract or Survey No. NFJD Unit
 Cor. No. AP-532

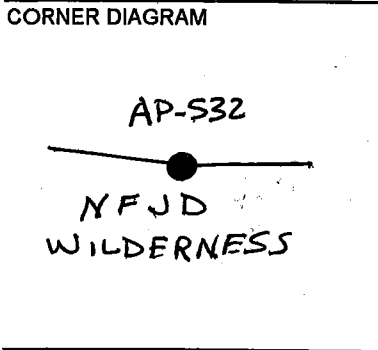

DESCRIBE CORNER MONUMENT FOUND
 NONE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND
 NONE

PHOTO IDENTIFICATION DATA
 Photo No.:
 Filed At.:
 Object Ident.:
 Ident. By:
Signature

DESCRIBE CORNER RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER
 From the jct. of roads 52 and 5507 travel southeasterly on 52 approx. 0.41 miles. Then walk southerly approx. 200 feet to the head of an unnamed creek. Follow the unnamed creek downstream approx. 2500 feet to the corner which is set in the creek.

PLANE COORDINATE POSITION DATA
 State: Oregon Zone: North
 X: 2,473,045.00'
 Y: 497,040.59'
 Datum: NAD1927

| | | | | | |
|---------------------------------|-------------------------------|----------|-----------------------------|------------------------|-------------------|
| Signature D. Schlaich | Title Land Surveyor | Division | Headquarters S.O. | Date 07-1993 | FS-7100-52 (3/68) |
|---------------------------------|-------------------------------|----------|-----------------------------|------------------------|-------------------|

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

5/8" by 36" rebar, with a 3 1/4" aluminum cap, 35" in the ground, marked "NFJD WILDERNESS AP-532 RLS 2308 1993".

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10" Englemann Spruce, N. 23° E., 17.3 ft., mkd. "WB/532" "BT" on double blaze.

25" Englemann Spruce, N. 42° W., 28.3 ft., mkd. "WB/532" "BT" on double blaze.

Both BT's have a 3/4" brass washer stamped "RLS 2308" nailed next to "BT" scribing on lower blaze.

Work Done By **D. Schlaich**

Title - Land Surveyor

Date **07-1993**

State Registration No.
or Agency

Certified Cor. Record Prepared ? **NO**

Filed At:

Date

REMARKS

Index File No.

T.

6 S.

R.

34 E.

M.

W.M.

Tract or Survey No.

NFJD Unit

Cor.

AP-532