


Washington transcript made 21838
L. H. Murphy

Field notes of the survey of the Base
line West through townships of ranges
28 and 29 East. It appears from an
examination that the chaining is in
excess or long about one chain and twenty
links per mile.

Make Transcript for Washington

Comp'd

Index diagram

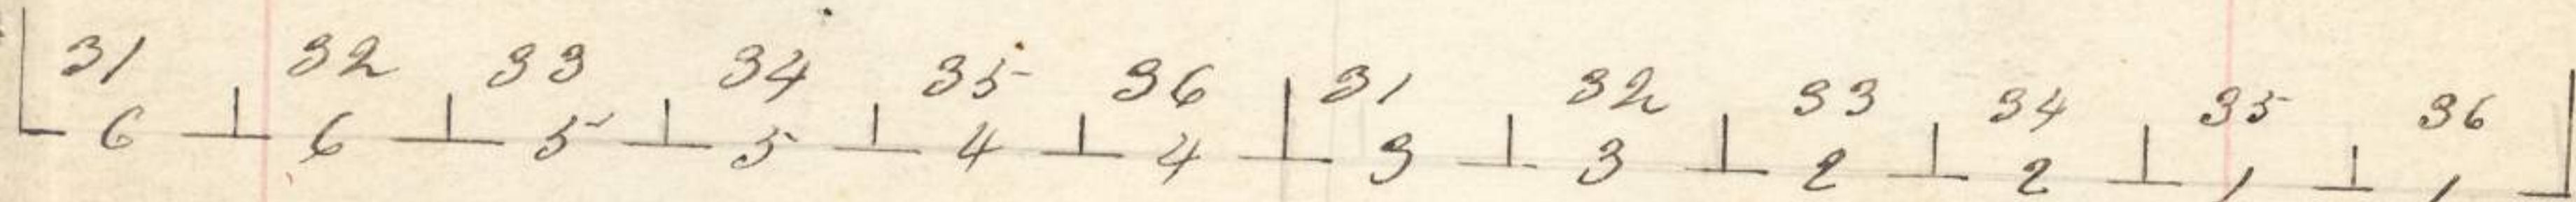

(Signature)

1 214

Baseline Range 29 East

To correct this line I commence at the established corner, for Township 1 N. R. 29 & 30 E. and run

West on South boundary of Sec 36

Var 22° East

40.00 Set post for gr. sec. cor. built mound + 30
of earth as per instructions

80.00 Set post & a stone 10 in lay & 4 in for corner to sections 35 & 36 built mound of earth as per instructions + 30

Land partly rolling soil 2nd rate

West on South boundary of Sec. 35

Var. 22° 30' East

00.00 descend hill slopes S.W.

30.00 Ascend " " S.E. - 400

40.00 Set post for gr. sec. cor. & built mound of earth as per instructions

50.00 Top of hill a ridge N.E. & S.W. + 200

80.00 Set post for corner to sections 34 & 35 and built mound of stone as per instructions

Land broken soil 2nd and 3rd rate

Base line Traverse 29 East

Went on South boundary of Section 34

On. 23° East

50 ascend ridge - nearly N & S

400 descend do do do

40.00 set post for gr. section cor. & built mound - 400
of length as per instructions

80.00 set post for corner to sections 33 & 34 and
built mound of length as per instructions

Land broken, see 2^d & 3^d note

Went on South boundary of Sec. 33

On. 20° 13' East

40.00 set post for gr. section cor. & built mound
of stone as per instructions

79.00 traverse corner N 60° W

80.00 set post for corner to Secs. 32 & 33

and built mound of stone as per instructions

Land rocky 2^d note

Baseline Range 29 East

West on South boundary of Section 32

Run 20° East

130 creek 23 1/2 miles course N 60° W

300 Ascend hill faces NE

40.00 Set post for q. sec. cor. & built mound of earth as per instructions

80.00 Set post for corner to sections 31 & 32 ^{+ 6000} and built mound of earth as per instructions
Land broken, soil 2nd rate

West on South boundary of sec. 31

Run 16° 15' East

40.00 Set post for q. sec. cor. with a stone 3 in diam & 15 in long & built mound of earth as per instructions

47.19 to corner established for ranges 28 & 29
This measurement makes the line 7.19 chs. longer than it was reported, which I throw upon West of the township

May 12th 1840

List of Names

A list of the names of the individuals employed to assist in running, measuring, or marking the lines and corners described in the foregoing field notes of the survey of the Base line through ranges 28 & 29 East of the Willamette ^{Mer.} showing the respective capacities in which they acted

A. M. Thompson Chairman

P. W. Bell

do

J. C. Litchfield

A. Person

We hereby certify that we assisted J. F. Carter
deputy Surveyor, in resurveying or
correcting the base line, West through
ranges 28 and 29 east; and that said
line has been in all respects to the
best of our knowledge and belief
well and faithfully surveyed, and
boundary monuments planted
according to the instructions fur-
nished by the Survey General
Allen M. Thompson

J. W. Bell
J. C. Litchfield

Subscribed and sworn to before me at
Oregan City - this 13th day of June 1860
J. F. Carter
Not. Pub.

220 A

I J. J. Coates, deputy surveyor, do solemnly swear that in prosecuting my contract with W. W. Chapman Surveyor of the public lands of the United States, in the State of Oregon, bearing date the 11th day May 1860, I found an error in the chaining of the base line through ranges 28 & 29 East ^{of the Willamette Meridian} and in strict conformity to the laws of the United States and the instructions furnished by the said Surveyor General, I have faithfully corrected or resurveyed the base line West through ranges 29 & 28 East and thrown the excess upon the West tier of sections, and do further swear that the foregoing are the true and original field notes of such survey.

J. J. Coates Dept. Surv.

Subscribed and sworn to before me at Eugene City this 26th day of June 1860

W. W. Chapman
 Secy Genl
 Orm

Surveyor General's Office
Eugene City July 13th 1860.

The foregoing field notes of the
Re-measurement of the Base
Line, through Ranges 29 & 28
East of the Willamette Mer-
idian, Oregon, by S. G. Carter
Deputy Surveyor; having been
critically examined, the nec-
essary corrections and ex-
planations made, the said
field notes and the surveys
they describe are hereby
approved.

W. W. Chapman
Sur. Genl of Oregon.