

Washington transcript, made L.A.M.

Field Notes of the Exterior  
Lines of Townships No. 1 & 2 N.  
Range No. 31. East of the Will-  
amette Meridian, Oregon - ex-  
ecuted by Josiah A. Burnett  
deputy Surveyor, under his con-  
tract No. 92, dated September  
12<sup>th</sup> 1860.

Commenced October 16<sup>th</sup> 1860

Completed Nov. 20<sup>th</sup> 1860.

Rec<sup>d</sup> Nov-19<sup>th</sup> 1860


Copied

+



# Index Diagram

R. 31. E.

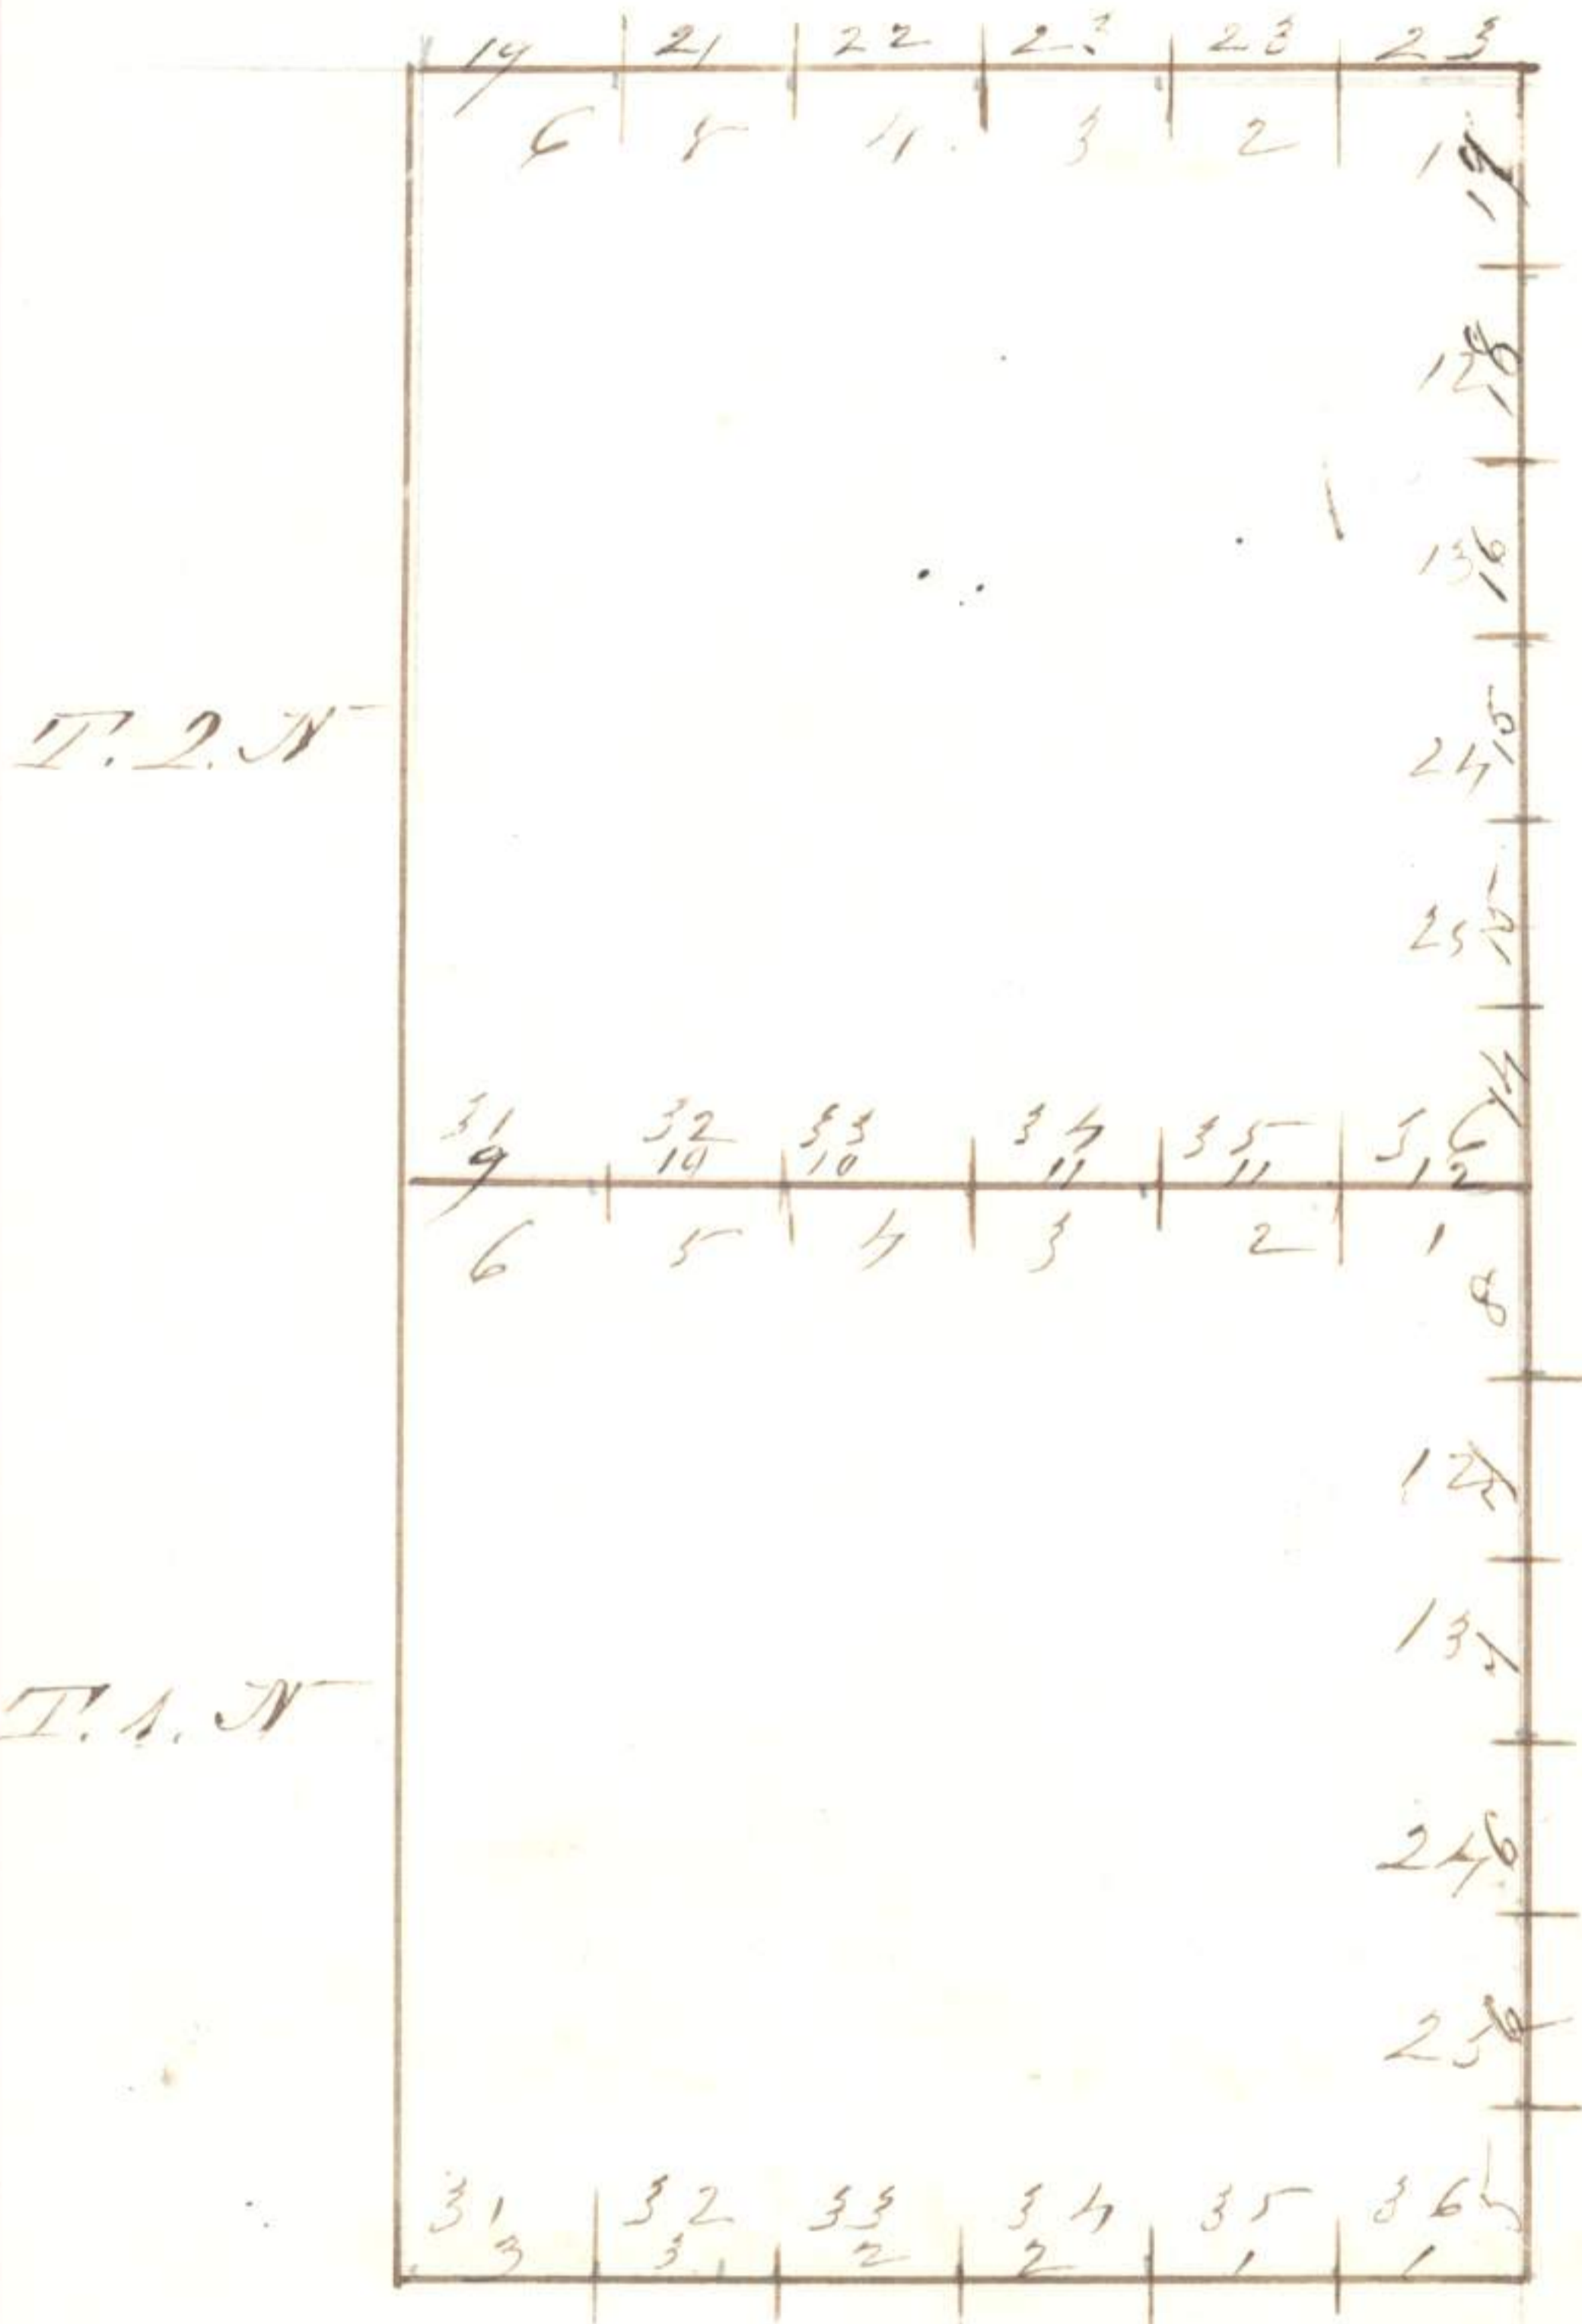



We Walter Poulding, Thomas H

Bell, Davis Divers & Patrick Call-  
-ihan, do solemnly swear that we  
will faithfully execute the duties  
of chain carriers, that we will level  
the chain upon uneven ground  
and plumb the tally pins, whether  
by sticking or dropping the same,  
that we will report the true distance  
to all notable objects, and the true  
length, of all lines that we assist  
in measuring to the best of our  
skills and ability

Walter Poulding Chairman  
Thomas H Bell Chairman

Daves, Divers Chairman

Patrick <sup>pin</sup> Callihan Chairman  
Mark

Subscribed & Sworn to before me by  
the above named persons this  
22<sup>d</sup> day of September 1860  
J. B. Hodgdon J. P.  
of Masco Co Oregon



We Wm Smith & Thomas White do  
 solemnly swear that we will  
 well and truly perform the duties  
 of Axemen according to instri-  
 ctions given, us, and to the  
 best of ~~our~~ skill and ability  
 William L. Smith Axeman  
 Thomas White Axeman  
 Subscribed & sworn to before me  
 by the above named persons  
 this 22<sup>d</sup> day of September 1860  
 J. B. Hodgdon, J. P.,  
 of the Co of Marsoo Arizon



Between Ranges 31 & 32 E. T. 1 N.

Field notes of the Survey of the exterior boundaries of Township No 1 North, of Range No 31 East of the Willamette meridian in the State of Oregon by J. A. Burnett deputy surveyor under his contract No 92, bearing date the 2<sup>nd</sup> day of September 1860.

East boundary of T. 1 N R 31 E

Beginning at the S. E. corner to Township 1 North, Range 31 East, (on the Base line) post standing in mound, as represented.

From which corner I Run North, along the East Boundary of Sec. 36.

Var.  $19^{\circ} 30' E$ .

40.00 Set a post for  $\frac{1}{4}$  Sec. cor. drove charred stake and raised mound with trench as per instructions

80.00 Set a Post for corner to Secs. 25, 36, 30 & 31 drove charred stake and raised mound with trench as per instructions

Land rolling grass hills, 2<sup>nd</sup> rate soil



246

(6)

Between R 31 &amp; 32 E. T. N

North on East boundary of Sec. 25

Var.  $14^{\circ}30' E$ 

- 30.00 To a Dry Ravine course N E
- 40.00 Set a Post for  $\frac{1}{4}$  Sec, cor, drove chain stake & raised mound with Trunk as per instructions
- 80.00 Set corner to Secs. 19, 30, 24 & 25 drove chained stake & raised mound with Trunk, as per instructions
- Land rolling grass hills & flat soil

North on the East boundary of  
Sec 24Var  $21^{\circ}00' E$ 

- 40.00 Set a post for  $\frac{1}{4}$  Sec, cor, drove chained stake & raised mound with Trunk, as per instructions
- 80.00 Set a post for corner to Sec's. 13, 24, 18 & 19, drove chained stake & raised mound with Trunk as per instructions.
- Land, rolling grass hills light



(7)

247

Between Ranges 31 & 32 E T. N

2<sup>nd</sup> rate soil

North on East boundary of Sec 13  
Variation. 19.15' E

40.00 Set a Post for  $\frac{1}{4}$  sec. cor. drove charred  
stake & raised mound with trench  
as per instructions.

80.00 Set post for corner to Sec's. 12, 13, 7 & 18  
drove charred stake & raised mound  
with trench as per instructions  
Land rolling grass hills light 2<sup>nd</sup> rate  
soil.

North on East boundary of Sec 12

Variation 20.00' E  
40.00 Set post for  $\frac{1}{4}$  sec. cor. drove charred  
stake & raised mound with trench  
as per instructions

80.00 Set a Post. for corner to Sec's. 6, 7, 1  
& 12. drove charred stake & raised  
mound with trench as per instructions  
Land. rolling grass hills 2<sup>nd</sup> rate soil



Between Ranges 31 & 32 E T. N

North on East boundary of Sec 1  
Variation  $19^{\circ}45' E$

40.00 Set a post for  $\frac{1}{4}$  sec. cor. drove  
chained stake & raised mound  
with trench as per instructions

80.00 A point for corner to Townships  
142 North. Ranges 31 & 32 East

Set post and drove chained  
stake, <sup>Raised</sup> mound & trench as per  
instructions

Land for the last 6 miles has  
been Rolling grass hills light  
2<sup>d</sup> rate soil

Oct. 17<sup>th</sup> 1860

Beginning at the established corner  
to Townships 142 North Ranges  
31 & 32 East. at a post in mound.

West on random line along  
the North boundary of Sec's <sup>1, 2</sup> ~~3, 4, 5, 6~~  
~~3, 4, 5, 6~~

Variation  $21^{\circ}15' E$

I set temporary half mile and



A list of the names of the individuals employed to assist in running measuring or marking the lines and corners described in the foregoing field notes of Townships T<sub>10</sub>N and 2 North of the Base line of Range T<sub>31</sub>E east of the Willamette meridian showing the respective capacities in which they acted,

Patrick Callahan, Chairman

Walter Paulding " "

Thomas Whit's Eyeman

M. C. C. Murphy, Compassman



We hereby certify that we assisted Josiah, A. Burnett <sup>267</sup>  
deputy surveyor in surveying the exterior lines  
of Township No 142 North of the base line of  
Range No 31 East of the Willamette meridian

and the survey of the Base line along the  
south boundary of Township No 1 North of  
Range No 31 East of the Willamette meridian  
and that said exterior and survey of the base  
line has been in all respects to the best of our  
knowledge and belief, well and faithfully sur-  
veyed and the boundary monuments planted  
according to the instructions furnished by  
the surveyor General,

M. O. Murphy

Patrick <sup>his</sup> Ballahan

Walter Poulding

Thomas White Osaman

Subscribed & sworn to by the above persons before  
me a Justice of the Peace, of the County of  
Wasco, State of Oregon, this 30 day of October  
1860—

G. B. Hodgdon

Justice of the Peace



I Josiah A. Burnett deputy  
 Surveyor do solemnly swear  
 that in pursuance of a contract  
 with W. W. Chapman Surveyor  
 of the public lands of the  
 United States, in the State of Oregon  
 bearing date the 12<sup>th</sup> day of Septem-  
 -ber 1860, and in strict conformity  
 to the laws of the United States,  
 and the instructions furnished  
 by the said Surveyor General, I have fai-  
 -thfully surveyed the exterior boundaries  
 of Townships No 1 and 2 North, of the base  
 line of Range No 31 East of the Willamette  
 Meridian in the State aforesaid and do further, sol-  
 -emly swear that the foregoing are the true and  
 original field notes of such survey

J. A. Burnett

Asst. Surveyor

Subscribed and sworn to before  
 me at Eugene City Nov 21. 1860

W. W. Chapman Surveyor



270

Surveyor General's Office

Eugene City, Dec 5<sup>th</sup> 1860.

The foregoing field notes of the survey of the remeasurement of the Base Line through Range No 31 East and the Exterior Lines of Townships No. 1 & 2 North of Range No. 31 East of the Willamette Meridian, Oregon, executed by J. A. Barnett under his contract of the 12<sup>th</sup> day of September 1860. having been critically examined the necessary corrections and explanations made, the said field notes and the surveys they describe are hereby approved.

A. W. Chapman  
Sur. Gen. of Oregon.