

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by Jas. Plurrian  
and Jas. Koland, U. S. Deputy Surveyor, to assist in  
running, measuring, and marking the lines and corners described in the  
foregoing field notes of the survey of the  
Subdivisional lines of Township 1 North  
Range 29 East Willamette Meridian, Oregon,  
showing the respective capacities in which they acted:

- L. D. Wooley ..... , Compassman.
- J. S. Medley ..... , Chainman.
- W. H. Medley ..... , Chainman.
- Frank Belshaw ..... , Chainman.
- Guy Davis ..... , Chainman.
- B. B. Cromer ..... , Axman.
- J. R. Madley ..... , Axman.
- ..... , Flagman.

FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted Jas. Plurrian  
and Jas. Koland, U. S. Deputy Surveyor, in surveying  
all those parts or portions of the  
Subdivisional line of Township 1 North  
Range 29 East Willamette Meridian, Oregon,  
as represented in the foregoing field notes as having been surveyed by  
him and under his direction; and that said survey has been in all respects,  
to the best of our knowledge and belief, well and faithfully surveyed,  
and the corner monuments established, according to the instructions  
furnished by the U. S. Surveyor General of Oregon.

- L. D. Wooley ..... , Compassman.
- J. S. Medley ..... , Chainman.
- W. H. Medley ..... , Chainman.
- Frank Belshaw ..... , Chainman.
- Guy Davis ..... , Chainman.
- B. B. Cromer ..... , Axman.
- J. R. Madley ..... , Axman.
- ..... , Flagman.

Subscribed and sworn to before me this 3rd day of  
August, 1887.

[SEAL.]

James P. Plurrian  
U. S. Deputy Surveyor

## FINAL OATH OF DEPUTY SURVEYOR.

I, James P. Currier and Jas. Toland, United States  
Deputy Surveyor, do solemnly swear that in pursuance of instructions  
received from Augustus H. Taylor, U. S.

Surveyor General for Oregon, bearing date of the 14<sup>th</sup>

day of May, 1887. I have well, faithfully,

and truly, in <sup>my</sup> own proper person, and in strict conformity with the  
instructions furnished by the U. S. Surveyor General for Oregon, the  
Surveying Manual, and the laws of the United States, surveying all

those parts or portions of Township 1 North

Range 33 East

Willamette Meridian, in the State of Oregon, as are represented in the  
foregoing field notes as having been surveyed by <sup>me</sup> and under <sup>my</sup>  
directions; and I do further solemnly swear that all the corners of said  
survey have been established and perpetuated in strict accordance with  
the Surveying Manual, printed instructions, the special written instruc-  
tions of the U. S. Surveyor General for Oregon, and in the specific man-  
ner described in the field notes, and that the foregoing are the *true* field  
notes of such survey, and should any fraud be detected I will suffer the  
penalty of perjury under the provisions of an act of Congress approved  
August 8, 1846.

James P. Currier  
James E. Toland U. S. Deputy Surveyor.

Subscribed and sworn to before me this Fifteenth

day of February, 1888

Oliver Woodcock

Notary Public

for Oregon

## Office of U. S. Surveyor General,

Portland, Oregon, June - 25 - 1888

foregoing

The following Field Notes of the Survey of the

Subdivisional lines of  
 Township 1. North Range  
 33 E. Will Mer. On

executed by James P. Currier and James E. Nolan  
 Special Joint U. S. Dept. Surveyors  
 under his Contract No. —, dated May 7

1887, having been critically examined,  
 the necessary corrections and explanations made, the  
 said Field Notes and the survey they describe, are  
 hereby approved.

Douglas W. Taylor.  
 Surveyor General.

FIELD NOTES

Of the survey of the Subdivisional

Lines of App. D. R. 32535 East

Willamette Meridian, Oregon,

as surveyed by James P. Currin and James E. Nolan  
their special

U. S. Deputy Surveyor, under ~~his~~ Contract No. \_\_\_\_\_

dated May 4<sup>th</sup>, 1887

Survey commenced, June 29<sup>th</sup>, 1887

Survey completed, July 15<sup>th</sup>, 1887

NAMES AND DUTIES OF ASSISTANTS.

- \_\_\_\_\_, Compassman.
- J. S. Medley \_\_\_\_\_, Chainman.
- H. H. Medley \_\_\_\_\_, Chainman.
- Frank Belshead \_\_\_\_\_, Chainman.
- Guy Davis \_\_\_\_\_, Chainman.
- H. B. Crowner \_\_\_\_\_, Axman.
- \_\_\_\_\_, Axman.
- \_\_\_\_\_, Flagman.

186

PRELIMINARY OATHS OF ASSISTANTS.

We, *Frank Belshaw Guy, Davis*


do solemnly swear that we will faithfully execute the duties of Chain Carriers; that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in the survey

of the *Subdivisional* lines of *T. 35 East* *T. 32 South* Willamette Meridian, Oregon.

~~*J. S. Madley*~~, Chainman.  
~~*W. R. Madley*~~, Chainman.  
*Frank Belshaw*, Chainman.  
*Guy Davis*, Chainman.

Subscribed and sworn to before me this *29<sup>th</sup>*

day of *June*, 188*7*

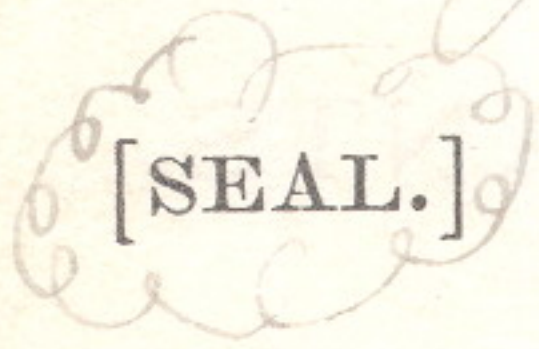

*James E. Holland*  
U.S. Deputy Surveyor

We, *D. B. B. Browner* and

*D. B. B. Browner*, do solemnly swear that we will well and truly perform the duties of Axmen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the

*Subdivisional Line of Tps. 1 South* Willamette Meridian, Oregon.  
*Rs. 32 + 35 East*

*B. B. Browner*, Axman.  
~~*J. R. Madley*~~, Axman.

Subscribed and sworn to before me this *29<sup>th</sup>*

day of *June*, 188*7*



*James E. Holland*  
U.S. Deputy Surveyor

# INDEX

Referring the Lines to the Pages of the Field Notes.

T.s. *1 South* R. *32 & 35 East* Will. Mer.  
*(R 35 East)* *(R. 32 East)*

6	<i>17</i>	5	6	4	<i>1</i>	3	2	<i>42</i>	1
<i>19</i>	⊙	<i>18</i>	⊙	<i>7</i>	⊙	<i>3</i>	<i>41</i>	<i>40</i>	
7	<i>20</i>	8	<i>8</i>	9	<i>4</i>	10	11	<i>39</i>	12
<i>22</i>	⊙	<i>21</i>	⊙	<i>10</i>			<i>38</i>	<i>36</i>	
18	<i>23</i>	17	<i>11</i>	16		15	14	<i>37</i>	13
<i>25</i>	⊙	<i>24</i>	⊙	<i>13</i>				<i>35</i>	
19	<i>26</i>	20	<i>14</i>	21		22	23		24
<i>29</i>	⊙	<i>28</i>	⊙	<i>15</i>					
30	<i>30</i>	29	<i>16</i>	28		27	26		25
<i>32</i>		<i>31</i>							
31	<i>33</i>	32		33		34	35		36

Meanders of \_\_\_\_\_, Pages \_\_\_\_\_ to \_\_\_\_\_

Meanders of \_\_\_\_\_, Pages \_\_\_\_\_ to \_\_\_\_\_

Subdivision of T. 7 South R. 35 East

Willamette Meridian, Oregon.

(8093-10 M.)

See page 317  
for amended field-notes

I commenced on Base line  
at the Cor. To Secs 3, 4, 33 & 34 and  
run S 42° E to reestablish line  
bet. Secs 3 & 4. Var 19° 0'

6.50 Pendleton & La Grande way on road  
course N E T S. W.

9.75 Old Toll road course " "

38.20 I found the 1/4 Sec. Cor. which  
I found to be a post 36 x 3 x 3 in  
marked 1/4 S and W face rotted off  
at top of the ground from which  
a pine 12 in in dia bears S 40° E. dist.  
76 lks marked 1/4 S. B.P. and the S.W.  
q of a pine 10 in in dia bears N 10°  
W 45 lks marked 1/4 S. B.P.

I set a new post 36 x 3 x 3 in 24 in  
in the ground marked 1/4 S and  
W face and marked a pine 5 in  
in diam S. 45° W dist 4 lks 1/4 S

B.P.

Subdivision of T. 1 South R. 35 East  
 Willamette Meridian, Oregon.

7810 I found the cor to sec 3.4.9.10  
 which is a post in mound of stone  
 65 links E. of line I found post  
 marked T. 1 S. S 3 on N.E. S. 10 on  
 S.E. S. 9 on S. 20 & R. 35 E. S. 4 on  
 N.W. 3 notches on S 1 on N. edge  
 I marked bearing trees as follows  
 A pine 18 in in dia N 20° E dist 85  
 lks mkd T. 1 S. S 3 B. A pine 5 in  
 in dia bears S 72° E dist 21 lks  
 mkd S. 10 B. A pine 5 in in dia  
 bears S 40° W dist 45 lks mkd R. 35  
 E. S. 9 B. A pine 5 in in dia bears  
 50° W dist 104 lks mkd S 4 B.  
 Land mostly level.  
 Soil 2nd rate  
 Heavy Pine, Fir, Spruce & Fir  
 Timber and under brush, 78.10 ch



## Subdivision of T. 1 South R. 35 East

Willamette Meridian, Oregon.

(8093-10 M.)

East on road bet. Secs 34 &amp; 10

Var  $23^{\circ}15' E$ .

1340 To N. R. Boundary Sit-Temp Cor.

39.75 To a point 14 lks N of 14 Sec cor.

which I found burned and  
bearing trees partly destroyedFrom them I set a post  $36 \times 3 \times 5$   
in 24 in in the ground marked 14

Saw a face from which a Fam.

crack  $36$  in in diam bears  $N 45^{\circ} W$ 

dist - 117 lks marked 14 S. R. P.

Thence I run  $N 89^{\circ} 48' W$  on true line

2.75 O. S. L. R. R. Cause N + S

5.25 Macham creek 10 lks wide cause

use N

26.35 Set a post  $48 \times 4 \times 4$  in 24 in in the

ground for N. R. M. C. marked

N. R. M. C. on W face from which

a spruce 6 in in dia bears  $N 70^{\circ} E$  dist

18 lks marked N. R. M. C. R. P. a spruce

20 in in dia bears  $S 20^{\circ} E$  dist - 36 lks

Sub-division of T. 7 South R. 35 East -  
Willamette Meridian, Oregon.

marked U. R. M. C. B. P. no other  
trees in limits - Cor stands 14.46  
chs. S 20° W of 51st - Mic post - an  
U. R. Bdy.

39.75 To Cor. To Secs 9, 10  
Land rolling - Soil 2nd rate  
Heavy pine, fir, spruce & Tamarack  
timber & underbrush 1340 ch

South on road. bet Secs 9 & 10  
Var 23° 15' E

37.57 Intersect - U. R. Bdy bet Tenu Cor  
39.98 To 1/4 Sec. Cor. I found post  
down & B. P. partly decayed  
I set a post 36x3x3 in 2ft in  
the ground marked 1/4 S an W  
face from which a Tamarack  
8 in in dia bears S 20° E dist 30 lks  
mkd 1/4 S. B. P. A fir 8 in in dia to  
S 20° W dist 30 lks mkd 1/4 S. B. P.  
Thence from S. an True line

5

195

Subdivision of T. 1 South R. 35 East

Willamette Meridian, Oregon.

(8093-10 M.)

2,41

1451 chs S 20 W of 5 1/2 M post

U. R. Bdy Set a post 48 x 4 x 4 in 24 in in the ground for M.C. cor. Mkd U. R. M.C. on N. face from which a fir 7 in in dia by S 22 W dist 50 lks. A tamarack 7 in in dia by N 45 E dist 27 lks, a fir

12 in in dia by S 20 E dist 50 lks. marked U. R. M.C. B. S.

A fir 8 in in dia by N 27 W dist 23 lks. Mkd U. R. M.C. B. S.

39.98

To Cor. To Secs 34, 33 & 34.

Land rolling. Soil 3rd rate Heavy pine, fir, spruce & Tamarack timber & underbrush.

37.57 chs.

*[Faint handwritten notes at the bottom of the page]*