

Washington transcript, made L.A.M.

Field Notes of the Exterior  
Lines of Townships No. 1 & 2 N.  
Range No. 31. East of the Will-  
amette Meridian, Oregon - ex-  
ecuted by Josiah A. Burnett  
deputy Surveyor, under his con-  
tract No. 92, dated September  
12<sup>th</sup> 1860.

Commenced October 16<sup>th</sup> 1860

Completed Nov. 20<sup>th</sup> 1860.

Rec<sup>d</sup> Nov-19<sup>th</sup> 1860

Copied


+

# Index Diagram

R. 31. E.

T. 2. N

T. 4. N

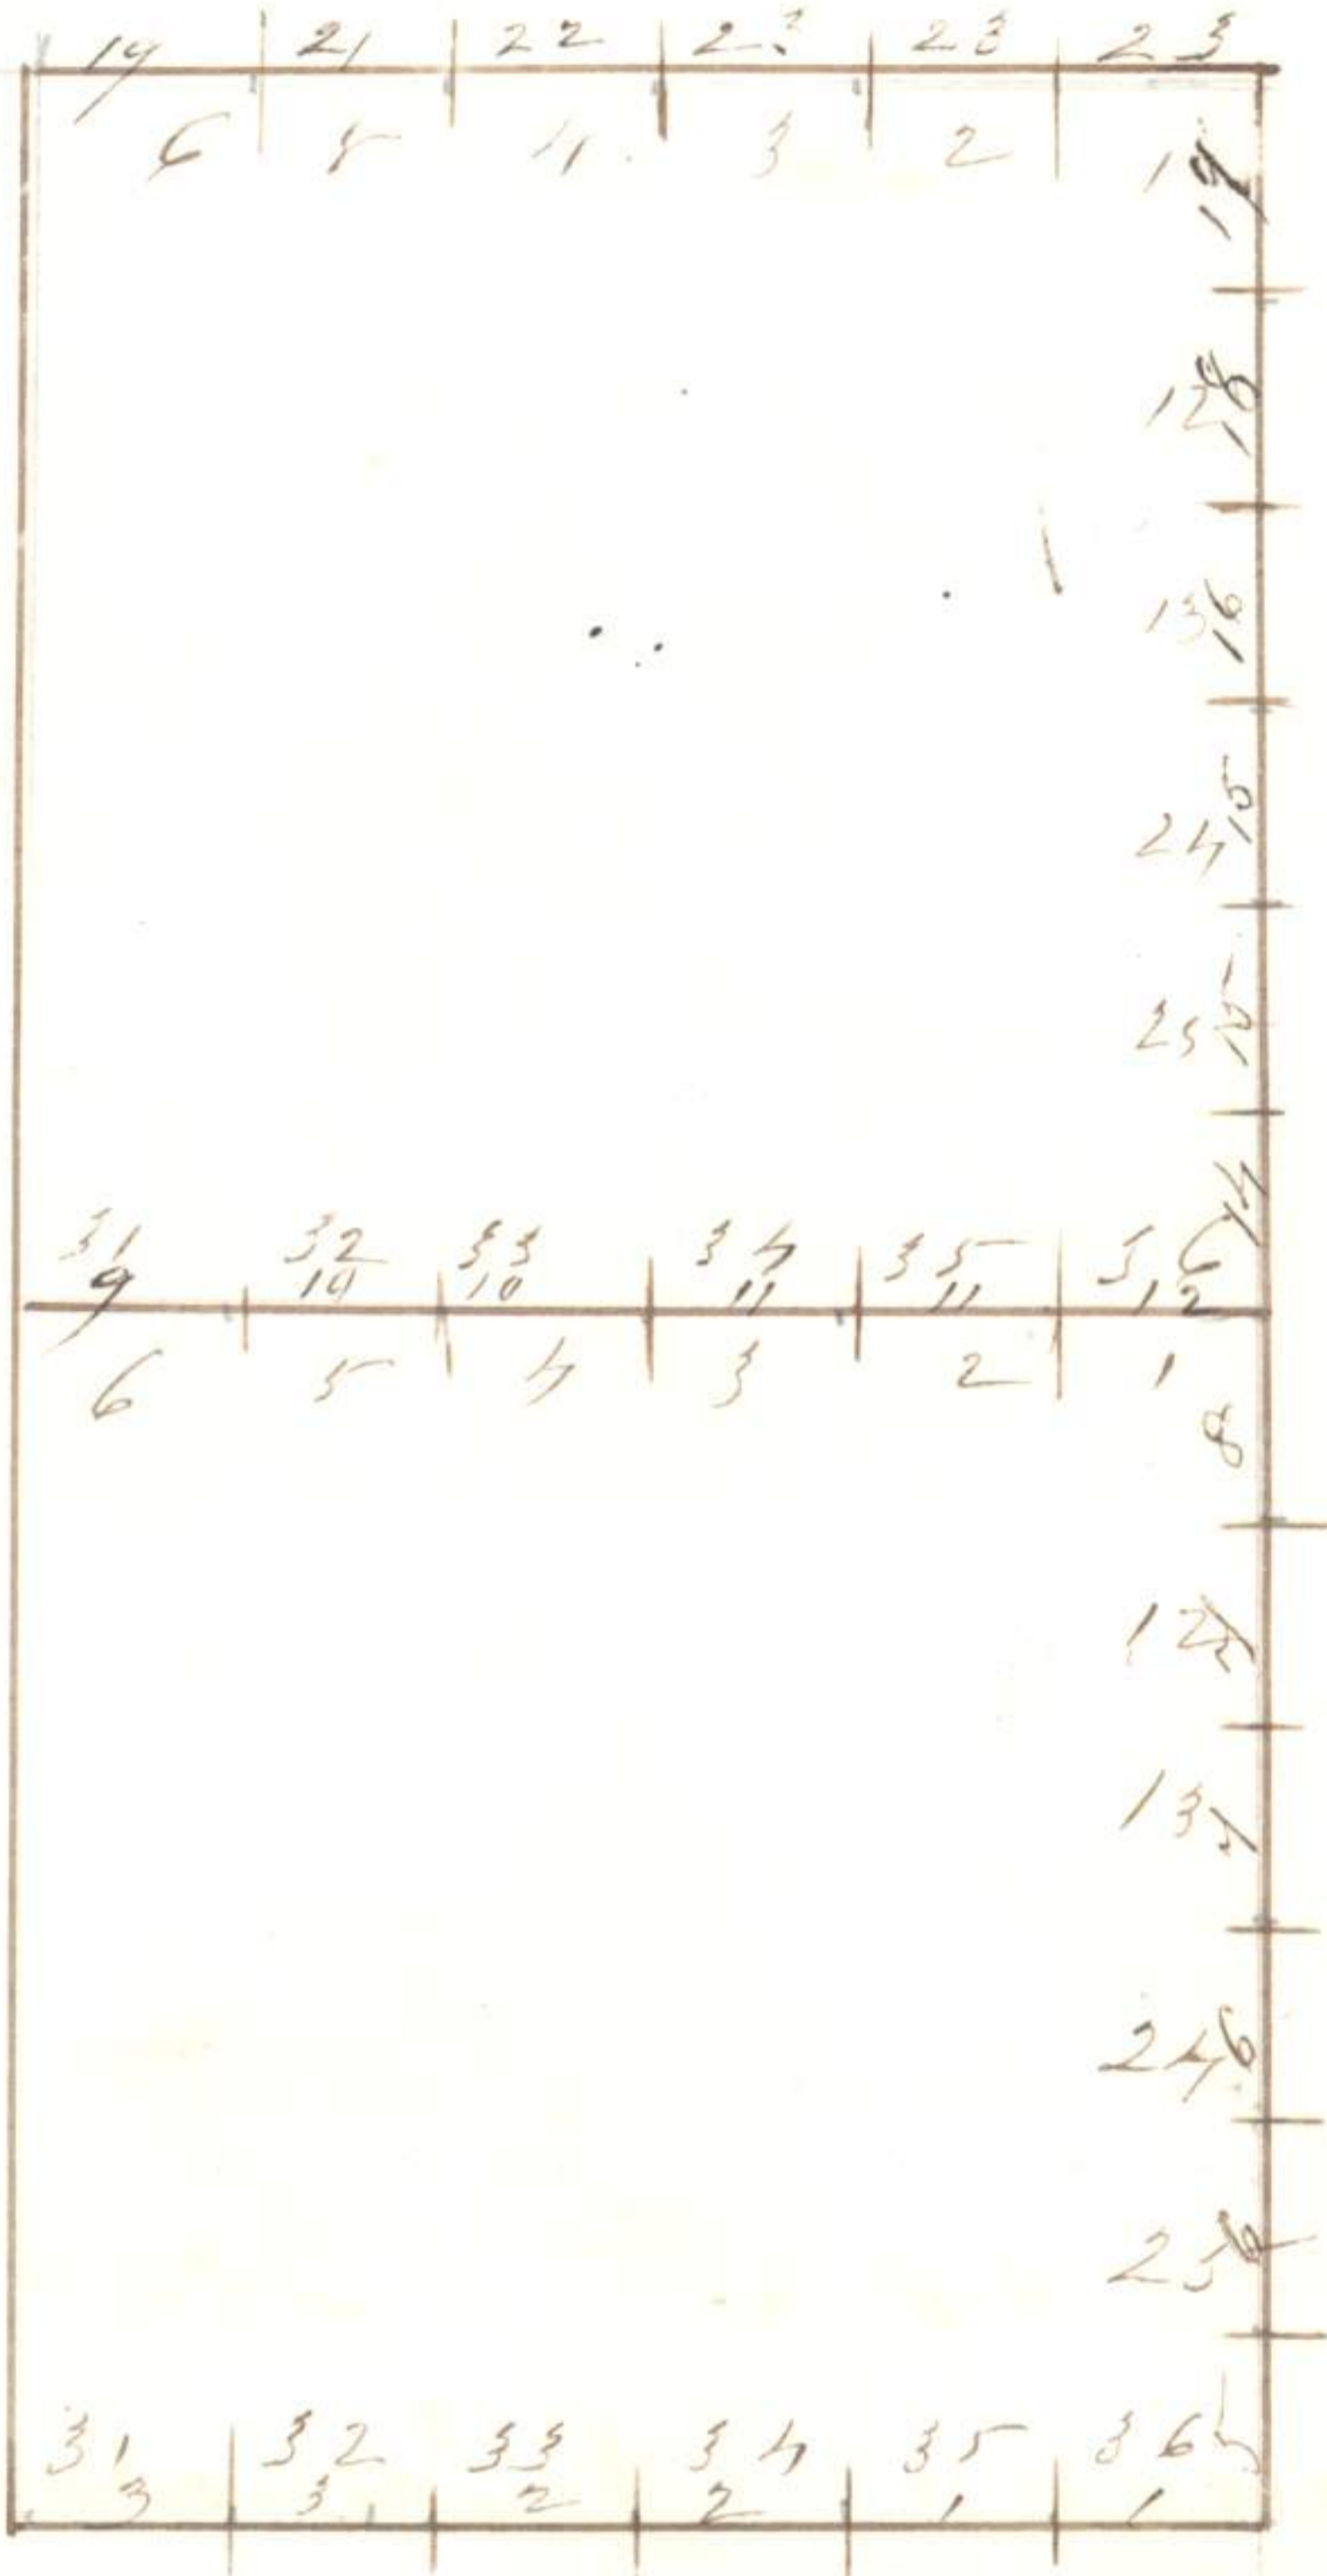

We Walter Poulding, Thomas H

Bell, Davis Divers & Patrick Call-  
-ihan, do solemnly swear that we  
will faithfully execute the duties  
of chain carriers, that we will level  
the chain upon uneven ground  
and plumb the tally pins, whether  
by sticking or dropping the same,  
that we will report the true distance  
to all notable objects, and the true  
length, of all lines that we assist  
in measuring to the best of our  
skills and ability

Walter Poulding Chairman  
Thomas H Bell Chairman

Daves, Divers Chairman

Patrick <sup>pin</sup> Callihan Chairman  
Mark

Subscribed & Sworn to before me by  
the above named persons this  
22<sup>d</sup> day of September 1860  
J. B. Hodgdon J. P.  
of Masco Co Oregon

We Wm Smith & Thomas White do  
solemnly swear that we will  
well and truly perform the duties  
of Axemen according to instruc-  
-tions given, ~~us~~ and to the  
best of ~~our~~ skill and ability  
William L. Smith Axeman  
Thomas White Axeman  
Subscribed & sworn to before me  
by the above named persons  
this 22<sup>d</sup> day of September 1860  
S. B. Hodgdon, J. P.,  
of the Co of Marsoo Arizon

South (9)  
North  
~~South~~ boundary T2 N R31 E

249

mile posts at every 40.00 chas 80.00 chas  
and at 6 miles 9 chains and 25 lks  
to a point 3 chains and 84 lks. South  
of the corner to Townships 14 2 Nor  
-th Ranges 30 + 31 East.

Therefore the correction will be 64.00  
links South per mile

I find the corner post standing  
with mound & trench.

From the corner to Townships 14 2  
North Ranges 30 + 31 East. I Run  
589.33' E on true line along the  
~~North~~ boundary of Sec. 6

49.25  
49.35 Set post for 1/4 Sec. Cor, drove chain  
-rod stake & raised mound with  
trench as per instructions

64.00 Top of Ridge. bears N & S

89.35 Set post for corner to Sec's. 5, 6, 31

89.25  
and 32, drove chain & stake & raised mound with  
-ch as per instructions. Land 2d rate Soil

North  
~~South~~ boundary T. N. R. 31 E

a point 600 links south of the  
 corner to Townships 24 3 North  
 Ranges 30 31 East. Therefore the  
 correction will be

100 links south per  
 mile.

I find the post & mound stan-  
 -ding with true

Note. In closing this line on  
 the meridian. I find it falls  
 short of the measurement of the  
 North boundary of T. N. R. 31 E  
 4.65 chs. I therefore re-measure  
 the North boundary of T. 2 N.  
 R. 31 E. also retrace East bou-  
 -ndary of same. and find it  
 correct. The error is in the course  
 of the <sup>guide</sup> meridian.

From the corner to Townships  
 24 3 North Range 30 31 East I run  
 S 89.17' E on a true line along the

A list of the names of the individuals employed to assist in running measuring or marking the lines and corners described in the foregoing field notes of Townships T<sub>10</sub>N and 2 North of the Base line of Range T<sub>31</sub>E east of the Willamette meridian showing the respective capacities in which they acted,

Patrick Callahan, Chairman

Walter Paulding " "

Thomas Whit's Eyeman

M. C. C. Murphy, Compassman

We hereby certify that we assisted Josiah, A. Burnett <sup>267</sup>  
deputy surveyor in surveying the exterior lines  
of Township No 142 North of the base line of  
Range No 31 East of the Willamette meridian

and the survey of the Base line along the  
south boundary of Township No 1 North of  
Range No 31 East of the Willamette meridian  
and that said exterior and survey of the base  
line has been in all respects to the best of our  
knowledge and belief, well and faithfully sur-  
veyed and the boundary monuments planted  
according to the instructions furnished by  
the surveyor General,

M. O. Murphy

Patrick <sup>his</sup> Ballahan

Walter Poulding

Thomas White Osaman

Subscribed & sworn to by the above persons before  
me a Justice of the Peace, of the County of  
Wasco, State of Oregon, this 30 day of October  
1860—

G. B. Hodgdon  
Justice of the Peace



I Josiah A. Burnett deputy  
 Surveyor do solemnly swear  
 that in pursuance of a contract  
 with W. W. Chapman Surveyor  
 of the public lands of the  
 United States, in the State of Oregon  
 bearing date the 12<sup>th</sup> day of Septem-  
 -ber 1860, and in strict conformity  
 to the laws of the United States,  
 and the instructions furnished  
 by the said Surveyor General, I have fai-  
 -thfully surveyed the exterior boundaries  
 of Townships No 1 and 2 North of the base  
 line of Range No 31 East of the Willamette  
 Meridian in the State aforesaid and do further sol-  
 -emly swear that the foregoing are the true and  
 original field notes of such survey

J. A. Burnett

Asst. Surveyor

Subscribed and sworn to before  
 me at Eugene City Nov 21. 1860

W. W. Chapman Surveyor

Surveyor General's Office

Eugene City, Dec 5<sup>th</sup> 1860.

The foregoing field notes of the survey of the remeasurement of the Base Line through Range No 31 East and the Exterior Lines of Townships No. 1 & 2 North of Range No. 31 East of the Willamette Meridian, Oregon, executed by J. A. Barnett under his contract of the 12<sup>th</sup> day of September 1860. having been critically examined the necessary corrections and explanations made, the said field notes and the surveys they describe are hereby approved.

A. W. Chapman  
Sur. Gen. of Oregon.