

Washington transcript, made L.A.M.

Field Notes of the Exterior
Lines of Townships No. 1 & 2 N.
Range No. 31. East of the Will-
amette Meridian, Oregon - ex-
ecuted by Josiah A. Burnett
deputy Surveyor, under his con-
tract No. 92, dated September
12th 1860.

Commenced October 16th 1860

Completed Nov. 20th 1860.


Rec^d Nov-19th 1860

Copia

+

Index Diagram

R. 31. E.

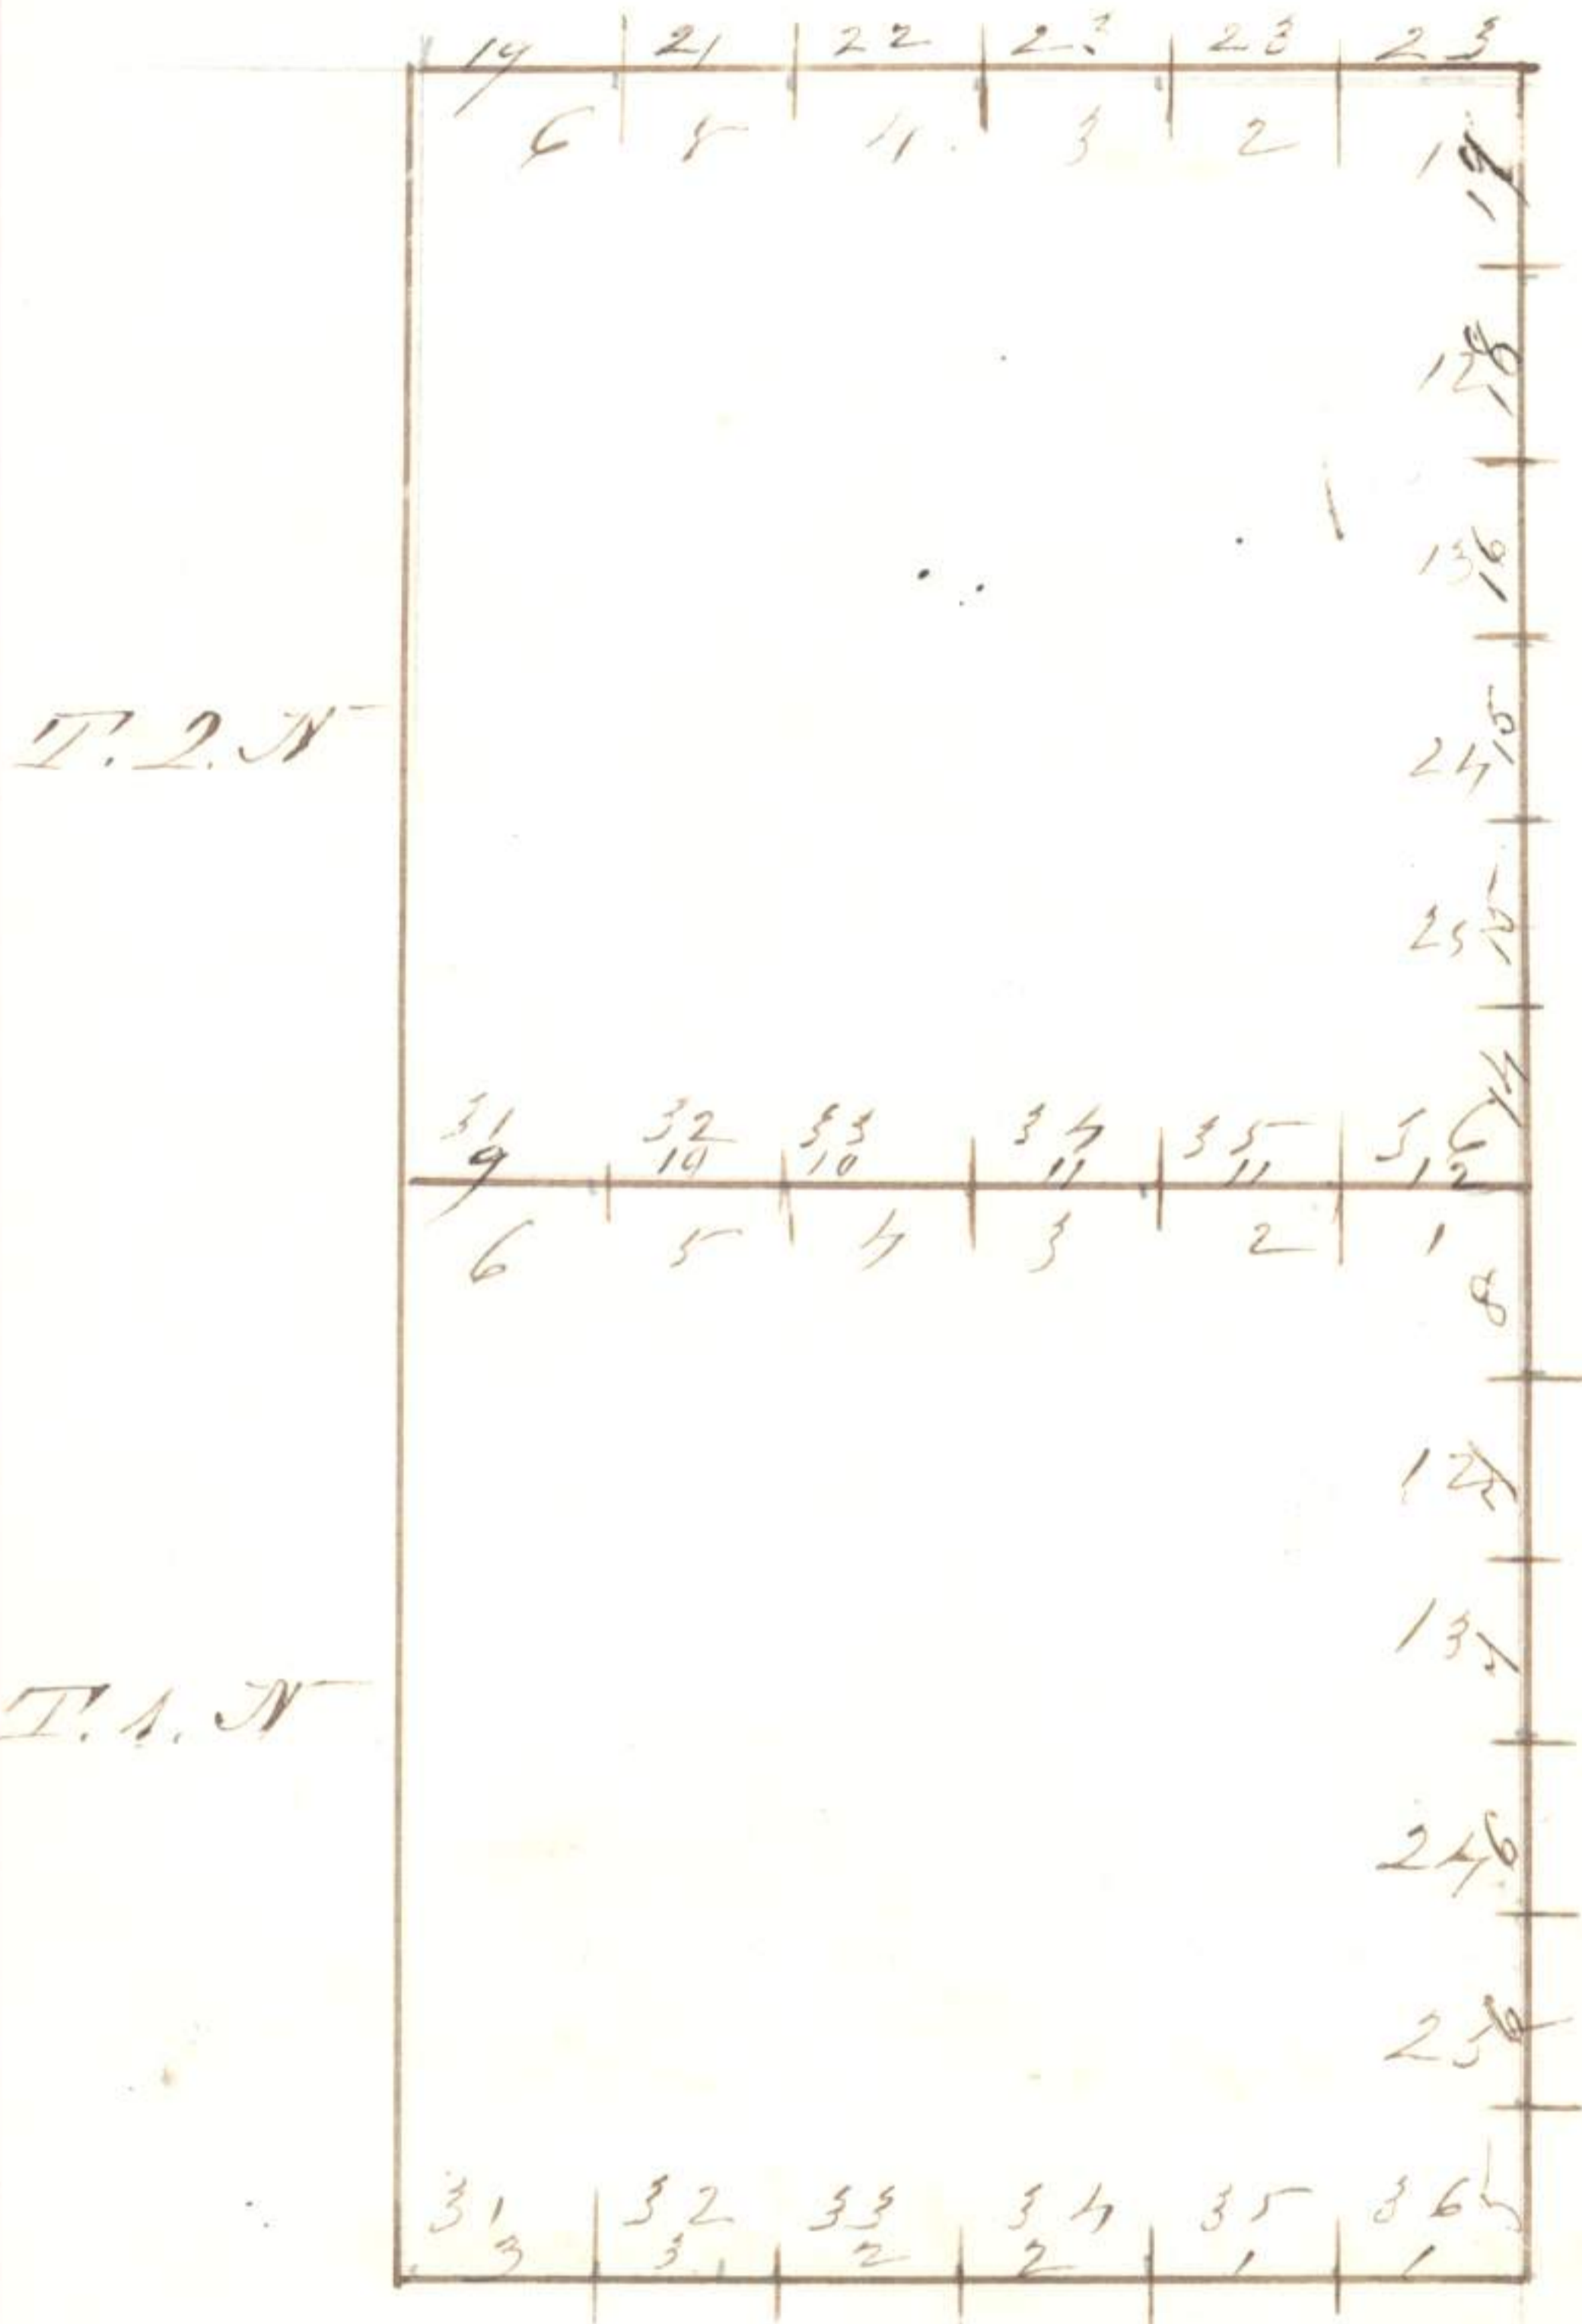

We Walter Poulding, Thomas H

Bell, Davis Divers & Patrick Callihuan, do solemnly swear that we will faithfully execute the duties of chain carriers, that we will level the chain upon uneven ground and plumb the tally pins, whether by sticking or dropping the same, that we will report the true distance to all notable objects, and the true length, of all lines that we assist in measuring to the best of our skill and ability.

Walter Poulding ^{chainman}
Thomas H Bell ^{chainman}

Daves Divers ^{chainman}

Patrick ^{pin} Callihan ^{chainman}
(mark)

Subscribed & Sworn to before me by
the above named persons this
22^d day of September 1860
J. B. Hodgdon J. P.
of Masco Co Oregon

We Wm Smith & Thomas White do
solemnly swear that we will
well and truly perform the duties
of Axemen according to instruc-
-tions given, ~~us~~ and to the
best of ~~our~~ skill and ability
William L. Smith Axeman
Thomas White Axeman
Subscribed & sworn to before me
by the above named persons
this 22^d day of September 1860
S. B. Hodgdon, J. P.,
of the Co of Marsoo Arizon

Between Ranges 31 & 32 E T. N

North on East boundary of Sec 1
Variation $19^{\circ}45' E$

40.00 Set a post for $\frac{1}{4}$ sec. cor. drove
chance stake & raised mound
with trench as per instructions

80.00 A point for corner to Townships
142 North. Ranges 31 & 32 East

Set post and drove chance
stake, ^{Raised} mound & trench as per
instructions

Land for the last 6 miles has
been Rolling grass hills light
2^d rate soil

Oct. 17th 1860

Beginning at the established corner
to Townships 142 North Ranges
31 & 32 East. at a post in mound.

Went on random line along
the North boundary of Sec's ^{1, 2} ~~3, 4, 5, 6~~
~~3, 4, 5, 6~~

Variation $21^{\circ}15' E$

I set temporary half mile and

South (9)
North
~~South~~ boundary T2 N R31 E

249

mile posts at every 40.00 chas 80.00 chas
and at 6 miles 9 chains and 25 lks
to a point 3 chains and 84 lks, south
of the corner to Townships 14 2 Nor
-th Ranges 30 + 31 East.

Therefore the correction will be 64.00
links south per mile

I find the corner post standing
with mound & trench.

From the corner to Townships 14 2
North Ranges 30 + 31 East, I Run
589.33' E on true line along the
~~North~~ boundary of Sec. 6

49.25
49.35 Set post for 1/4 Sec. Cor, drove chain
-rod stake & raised mound with
trench as per instructions

64.00 Top of Ridge bears N 4 S

89.35 Set post for corner to Sec's. 5, 6, 31

89.25
and 32, drove chain & stake & raised mound with
-ch as per instructions. Land 2d rate Soil

South
North

South boundary T & A B 31 E

- 589³³' E on a true line along
the ~~South~~ ^{North} boundary of Sec. ~~32~~ ³³
40.00 Set post for 1/4 Sec. Cor. drove charred
stake & raised mound with trench
as per instructions
- 80.00 Set post for corner to Secs. 4, 5,
32 & 33. drove charred stake and
raised mound with trench
as per instructions
- Land selling @ rate soil

- 589³³' E on a true line along
the ~~South~~ ^{North} boundary of Sec. ~~33~~ ³⁴
4.00 to bed of a dry Run course N.E.
40.00 Set a post for 1/4 Sec. cor. drove charred
stake and raised mound with
trench as per instructions
- 75.30 Head of a dry Run course
N.E.
- 80.00 Set post for corner to Secs. 3, 4,
33 & 34. drove charred stake and
raised mound with trench

251

South (11)
North
~~South~~ boundary T2N R31E

as per instructions.
Land Broken hills poor stony
soil.

S 89° 33' E. on a true line along the
North
~~South~~ boundary of Sec. ~~2~~ 3.
Variation 20.00° E

40.00 Set post for $\frac{1}{4}$ Sec. cor. drove char-
-ed stake and raised mound with
trunk as per instructions

80.00 Set a post for corner to Sec's. 2,
3, 34 and 35. Drove charred stake and
raised mound with trunk as
per instructions.

Land Grass hills. 3^d rate sandy soil

S 89° 33' E on true line along the ~~South~~ North
boundary of Sec. ~~2~~ 2.
Variation 20.00° E

33.00 To a dry Ravine course N.E.

40.00 Set a post for $\frac{1}{4}$ Sec. cor. drove charred
stake and raised mound with trunk
as per instructions

80.00 Set a post for $\frac{1}{4}$ corner to Sec's

South boundary T2 N R31 E

1. 2, 35 and 36 drove charred stake
and raised mound with truck
as per instructions.

Land rolling grass hills 2^d rate soil

S89°33' E on a true line along the
North ~~South~~ boundary of Sec. #1. Var. 19°30' E

13,00 To the Bed of a Dry Ravine course
North. There is a beautiful
spring in this ravine, about
60,000 chs. south of this point,
and also one about 40,00 chs
North, with good tillable land
surrounding.

40,00 Set a Post for 1/4 cu. cor drove,
charred stake and raised mound
with truck as per instructions

80,00 The corner to Township 1 and 2 North
Range 31 & 32 East,
Land Rolling 2^d rate sandy soil
covered with rich grass—

Oct 18th 1860.

South boundary L2N R31E

General Description

This Township contains a large amount of 1st and 2^d rate land and is well adapted to grazing purposes, as it is covered with rich grass.

The Township will admit of settlements and should therefore be subdivided

A list of the names of the individuals employed to assist in running measuring or marking the lines and corners described in the foregoing field notes of Townships T₁₀N and 2 North of the Base line of Range T₃₁E east of the Willamette meridian showing the respective capacities in which they acted,

Patrick Callahan, Chairman

Walter Paulding " "

Thomas Whit's Eyeman

M. C. C. Murphy, Compassman

We hereby certify that we assisted Josiah, A. Burnett
deputy surveyor in surveying the exterior lines ²⁶⁷
of Township No 142 North of the base line of
Range No 31 East of the Willamette meridian

and the survey of the Base line along the
south boundary of Township No 1 North of
Range No 31 East of the Willamette meridian
and that said exterior and survey of the base
line has been in all respects to the best of our
knowledge and belief, well and faithfully sur-
veyed and the boundary monuments planted
according to the instructions furnished by
the surveyor General,

M. O. Murphy

Patrick ^{his} Ballahan

Walter Poulding

Thomas White Osaman

Subscribed & sworn to by the above persons before
me a Justice of the Peace, of the County of
Wasco, State of Oregon, this 30 day of October
1860—

G. B. Hodgdon
Justice of the Peace

I Josiah A. Burnett deputy
 Surveyor do solemnly swear
 that in pursuance of a contract
 with W. W. Chapman Surveyor
 of the public lands of the
 United States, in the State of Oregon
 bearing date the 12th day of Septem-
 -ber 1860, and in strict conformity
 to the laws of the United States,
 and the instructions furnished
 by the said Surveyor General, I have fai-
 -thfully surveyed the exterior boundaries
 of Townships No 1 and 2 North of the base
 line of Range No 31 East of the Willamette
 Meridian in the State aforesaid and do further sol-
 -emly swear that the foregoing are the true and
 original field notes of such survey

J. A. Burnett

Asst. Surveyor

Subscribed and sworn to before
 me at Eugene City Nov 21. 1860

W. W. Chapman Surveyor

270

Surveyor General's Office

Eugene City, Dec 5th 1860.

The foregoing field notes of the survey of the remeasurement of the Base Line through Range No 31 East and the Exterior Lines of Townships No. 1 & 2 North of Range No. 31 East of the Willamette Meridian, Oregon, executed by J. A. Barnett under his contract of the 12th day of September 1860. having been critically examined the necessary corrections and explanations made, the said field notes and the surveys they describe are hereby approved.

A. W. Chapman
Sur. Gen. of Oregon.