

FIELD NOTES

Of the survey of the Subdivisional Allotment,

Lines of T. 2. N. R. 33 E

of the Willamette Meridian,

Oregon, as surveyed by James Pleurissie

U. S. Deputy Surveyor, under his Contract No. 537

dated March 5th 1889

Survey commenced, July 1st 1889

Survey completed, July 2nd 1889

NAMES AND DUTIES OF ASSISTANTS,

J. R. Laramore, ^{Chainman} Compassman.

J. L. Brown, Chainman.

....., Chainman.

....., Chainman.

....., Chainman.

L. M. Stone, Axeman.

R. E. Long, Axeman.

....., Flagman.

188
220

PRELIMINARY OATHS OF ASSISTANTS.

We, J. R. Saramore and
J. L. Brown

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the subdivisional and
Allotment lines of T. 2 N. R.
33 E Willamette Meridian, Oregon.

J. R. Saramore, Chainman.
J. L. Brown, Chainman.
_____, Chainman.
_____, Chainman.

Subscribed and sworn to before me, this 1st
day of July 1889
[SEAL.] Thos Fitz Gerald
Notary Public

We, C. M. Stone and
R. E. Long

do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the

subdivisional &
Allotment Willamette Meridian, Oregon.


C M Stone, Axeman.
R E Long, Axeman.

Subscribed and sworn to before me, this 1st
day of July 1889
[SEAL.] Thos Fitz Gerald
Notary Public

INDEX

Referring the Lines to the Pages of the Field Notes.

T. 2 North R. 33 East Will. Mer.

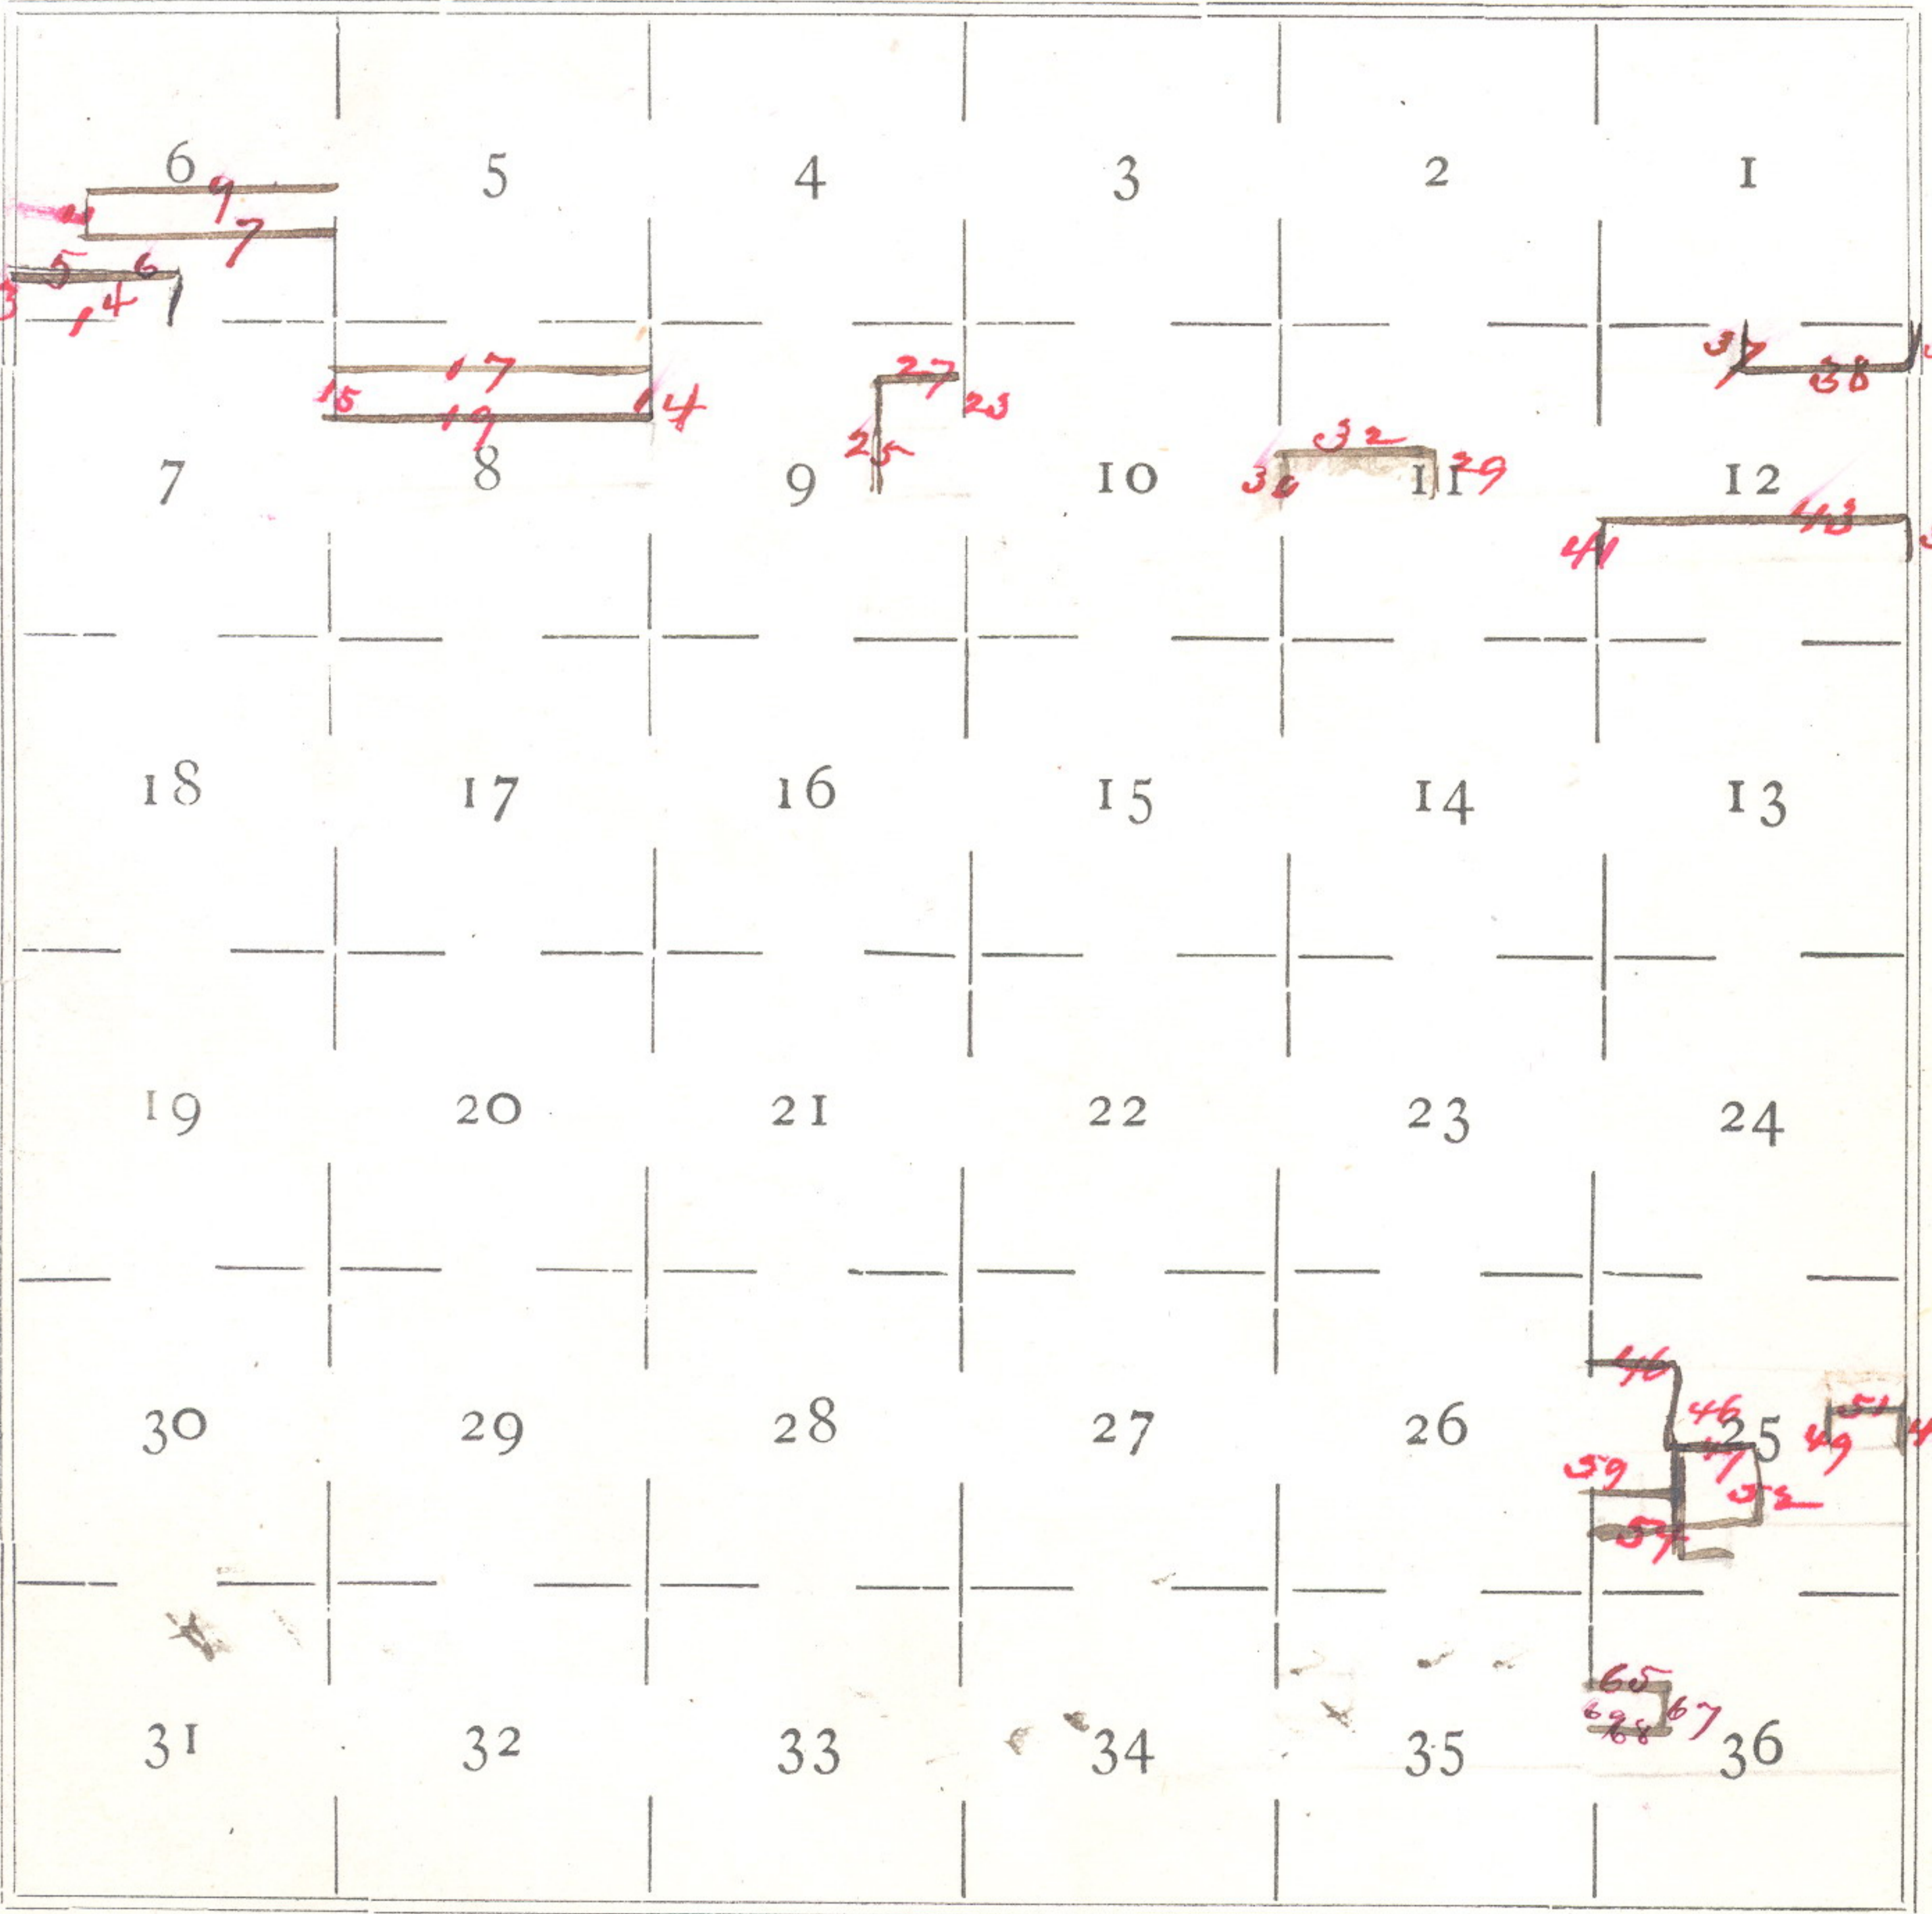

Meanders of _____ Pages _____ to _____

Meanders of _____ Pages _____ to _____

Allotment

35

Subdivision of T. 2 North R. 33 East

255

Willamette Meridian, Oregon.

See 12.

From the corner to See 12.
1-6-7 & 12 on East bdy
of Township which is
a Basalt stone 12 x 8 x 7 ins
8 ins in the ground marked
with 5 notches on S. & 1 notch
on N edge pits 18 x 18 x 12 ins
in each see 5 1/2 ft dirt &
mound of earth 2 ft high
4 1/2 ft base over it.

I run
Tenth on true line between
See 7 & 12

Var 19° 30' East

1000 Set basalt stone 9 x 8 x 7 ins
6 ins in the ground for 1/32
See corner marked 1/32 on N.
face; dug pits 18 x 18 x 12
ins N.E. of stone 5 1/2 ft
dirt.

36

Allotment

Subdivision of T. 2 North R. 33 E

Willamette Meridian, Oregon.

Sec 12.

(8093-10 M.)

and raised a mound of
earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft
base over it.

Land rolling
Soil arby & barren

Allotment

257/37

Subdivision of T. 2 North R. 33 East

Willamette Meridian, Oregon.

See 12

From the $\frac{1}{4}$ See corner bet.

Sees 1 & 2. which is a charred stake with pits 18 + 18 + 12 ins E & W. of stake 5 $\frac{1}{4}$ ft dist & mound of earth 1 $\frac{1}{4}$ ft high 3 $\frac{1}{4}$ ft base over it.

In O pit a stake 2 ins square firmly set in the ground marked $\frac{1}{4}$ S on N face.

From South on true line in See 12.

Var 20" East

- 9.00 Descend bank about 30 ft
- 14.00 Set basalt stake 10 + 8 x 7 ins 6 ins in the ground for $\frac{1}{32}$ See corner marked $\frac{1}{32}$ on W. face.

Allotment

Subdivided of T. 2 North R. 33 East

Willamette Meridian, Oregon.

Sec 12.

(8093-10 M.)

and raised a mound of
stone over it.

Pits impracticable

Land rolling

Soil not rich

Good grass

From $\frac{1}{32}$ Sec corner 10 chs.
S. of $\frac{1}{4}$ Sec corner between
Secs 1 and 12.

I run

N 89° 51' East on random
line in Sec 12.

Var. 20° E

Setting temporary corner
at 20 chains and at

4000 Intersect the N & S line
at $\frac{1}{32}$ Sec corner. 10 chs.

S. of corner to Secs 1-6-7 & 12.

Thence I run

Allotment

259/39

Subdiv³ of T. 2 North R. 33 E

Willamette Meridian, Oregon.

Sec 12

S 89° 51' W on true line in
Sec 12. Var 19° 30' E.

2000 Set post 3 ft long 3 ins. sq.
with marked stone 12 ins in
the ground for $\frac{1}{32}$ Sec corner
marked $\frac{1}{32}$ S. on N face; clay
pits 18 x 18 x 12 ins E. & W of post
5 1/2 ft dia and raised a mound
of earth 1 1/2 ft high 3 1/2 ft low
over it.

33.00 Gulch course S. - 50

38.00 Descend bank - 30

4000 To $\frac{1}{32}$ Sec corner 10 chs S
of $\frac{1}{4}$ Sec corner bet. Secs 1 & 12

Land mostly level

Soil 1st rate. Cultivated

From the $\frac{1}{16}$ Sec corner 20 chs
N. of the corner to Secs 7 12 13 &
18 which is a charred stake with
pits 18 x 18 x 12 ins N + S of Stake
5 1/2 ft dia & mound of earth

Attachment

Subdivision of T. 2 North R. 33 E.

Willamette Meridian, Oregon.

Sec 12

(8093-10 M.)

1 1/2 ft. high 3 1/2 ft base over it
In N. pit stake 2 ins square
firmly set in the ground
marked 1/16 S on N. face
Join
North on true line between
Secs. 7 and 12

Var 19° 15' E.

250

Fence corner E. + W

800

Road " S. W

1000

Deposited a marked stone

12 ins in the ground for
1/32 Sec
corners. dug pits 18 x 18

+ 12 ins N x S of corners

5 1/2 ft deep and raised a
mound of earth 1 1/2 ft. high
3 1/2 ft base over it. In N.

pit drove a stake, 2 ins sq.

2 ft long 12 ins in the

ground marked 1/32 S on N face

Land along bluff

Soil is rate

Growing Grain

488 268

Subdivision of T. 2 North R. 33 East

Willamette Meridian, Oregon.

See 25

(8093-10 M.)

From the $\frac{1}{4}$ See corner
 between Sees 25 + 30
 on East boundary of the
 which is a basalt stone
 $10 \times 9 \times 7$ ins & ins in the
 ground marked $\frac{1}{4}$ on N. face
 pits $18 \times 18 \times 12$ ins N. & S. of
 cor $5\frac{1}{2}$ ft dirt & mound
 of earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$
 ft base covered.

Iron

North on true line between
 Ranges 33 and 34 E.
 Var 20° E.

10.00 Set stone $10 \times 9 \times 7$ ins
 6 ins in the ground for
 $\frac{1}{32}$ See. corner, marked $\frac{1}{32}$
 on N. face; dug pits
 $18 \times 18 \times 12$ ins. N. & S. of
 stone $5\frac{1}{2}$ ft dirt and mound
 mound of earth $1\frac{1}{2}$ ft high

Subdivision of T. 2 North R. 33 East
Willamette Meridian, Oregon.

Sec 25

3 1/2 ft base over it.

Land rolling

Soil into & Grass

From the 1/6 Sec corner 20 ch
West of 1/4 Sec corner betw.
Secs 25 + 30 on E ldy. of
Sp. which is a charnel stake
12 ins in ground, pits 18 x 18
x 12 ins E. & W. of cor. 5 1/4 ft
dist & mound of earth 1 1/2
ft high 3 1/2 ft. base over it.

In E pit stake 2 ins square
marked

1/6 S. on N. face

I run

North on true line in

Sec 25

Var 20' E.

1000 Set stone 9 + 8 + 7 ins

6 ins in the ground

FINAL OATHS FOR SURVEYS.

List of the names of the individuals employed by James P. Currier, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field notes of the survey of the subdivisional and allotment lines of T. 2. N. R. 33. E. Willamette Meridian, Oregon, showing the respective capacities in which they acted:

- Compassman.
Chainman.
Chainman.
J. R. Laramore, Chainman.
J. L. Brown, Chainman.
E. M. Stone, Axeman.
R. E. Long, Axeman.
Flagman.

FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted James P. Currier, U. S. Deputy Surveyor, in surveying all those parts or portions of the subdivisional and allotment lines of T. 2. N. R. 33. E. Willamette Meridian, Oregon, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- Compassman.
J. R. Laramore, Chainman.
J. L. Brown, Chainman.
Chainman.
Chainman.
E. M. Stone, Axeman.
R. E. Long, Axeman.
Flagman.

Subscribed and sworn to before me, this 2nd day of July 1887.
[SEAL.] Wm L. General
Notary Public

FINAL OATH OF DEPUTY SURVEYOR.

I, James P. Plummer
United States Deputy Surveyor, do solemnly swear that in pursuance of

instructions received from Douglas H. Taylor

U. S. Surveyor General for Oregon, bearing date of the 19th

day of March 1889, I have well, faithfully and truly, in my own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor General for Oregon, the Surveying Manual, and the laws of the United States, surveying all those

parts or portions of the Allotment & subdivis-

ional lines of T. 2 N. R. 33 E

Willamette Meridian, in the State of Oregon, as are represented in the foregoing field notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions, the special written instructions of the U. S. Surveyor General for Oregon, and in the specific manner described in the field notes, and that the foregoing are the *true* field notes of such survey, and should any fraud be detected I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.

James P. Plummer
U. S. Deputy Surveyor.

Subscribed and sworn to before me, this 2nd

day of July 1889

Thos Fitz Gerald
Notary Public

207

Office U. S. Surveyor General,

Portland, Oregon, *August 30th* 1889

foregoing
The following Field Notes of the Survey of the

Subdivisions & Allotments

lots of Township 2 North

Range 33 E. Will. Mer. Co.

executed by *James P. Currier U.S.*
Dept. Surveyor

under his Contract No. *537*, dated

March 5 1889, having been critically examined, the

necessary corrections and explanations made, the said Field Notes

and the survey they describe, are hereby approved.

Douglas W. Taylor -

Surveyor General.