

Subdivisions

Page 125 River crossing

see notes as corrected

90 " "

" " " "

65 Railroad "

" " " "

83 P & L & G Wagon road

33 " " " " "

O. H.

Sub Subdivisions

Page 19 creek 60 links (7)

none

" 19 " 20 "

"

" 87 River crossing

none

" 39 P & L & G wagon Road

Roads in all directions

" 75 " " " " " and

meanders of Wild horse creek

FIELD NOTES

Of the survey of the *Subdivisional*

Lines of *Township 2 North*

Range 33 East Willamette Meridian, Oregon,

as surveyed by *Geo G. Currier and Geo Toland*

U. S. Deputy Surveyors, under ^{their} his Contract No. _____

dated *May 4th*, 1887

Survey commenced, *August 29th*, 1887

Survey completed, *August 31st*, 1887

NAMES AND DUTIES OF ASSISTANTS.

- L. J. Wooley*, _____, Compassman.
- J. S. Medley*, _____, Chainman.
- W. H. Medley*, _____, Chainman.
- Frank Belshaw*, _____, Chainman.
- Guy Davis*, _____, Chainman.
- D. B. Crowner*, _____, Axman.
- Frank Noyes*, _____, Axman.
- _____, _____, Flagman.

PRELIMINARY OATHS OF ASSISTANTS.

²
We, *J. S. Medley, W. H. Medley*
Frank Belshaw and Guy Davis

do solemnly swear that we will faithfully execute the duties of Chain Carriers; that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in the survey


of the

Subdivisional lines of *Township 2 North*
Range 38 East Willamette Meridian, Oregon.

J. S. Medley, Chainman.
W. H. Medley, Chainman.
Frank Belshaw, Chainman.
Guy Davis, Chainman.

Subscribed and sworn to before me this *29th*

day of *August*, 188*7*

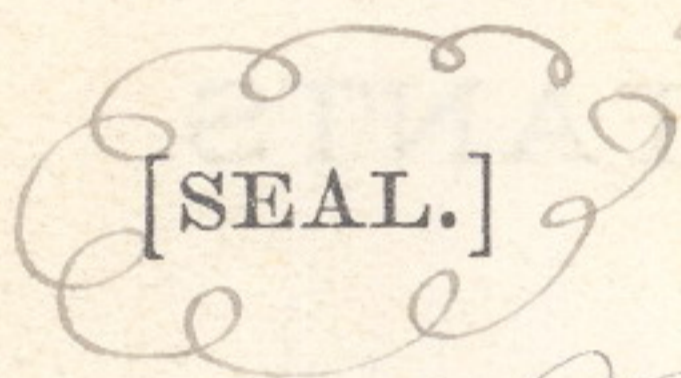

James E. Holcomb
U.S. Dept. Surveyors

We, *B. B. Cremer* and
Frank Koons, do solemnly

swear that we will well and truly perform the duties of Axmen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the

Subdivisional lines of *T. 2 N.*
Range 38 East Willamette Meridian, Oregon.

B. B. Cremer, Axman.
Frank Koons, Axman.

Subscribed and sworn to before me this *29th*

day of *August*, 188*7*



James E. Holcomb
U.S. Dept. Surveyors

INDEX

Referring the Lines to the Pages of the Field Notes.

T. 2 North R. 33 East Will. Mer.

6	128	5	93	4	69	3	46	2	22	1
127	125	91	67	44	20					
7	123	8	90	9	65	10	42	11	18	12
121	119	87	63	40	16					
18	116	17	85	16	61	15	37	14	14	13
114	111	83	59	35	11					
19	109	20	81	21	57	22	33	23	9	24
106	104	78	55	30	7					
30	101	29	76	28	42	27	28	26	4	25
99	97	74	50	26	3					
31	95	32	71	33	48	34	24	35	7	36

Meanders of _____, Pages _____ to _____

Meanders of _____, Pages _____ to _____

Subdivisions of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

Commenced the survey of this Township

on August 29th 1887

Beginning at cor to sec 35 & 36

T 2 North R 33 E and 1 & 2 N N

R 33 E I ran

North bet sec 35 and 36

Co 22 East

Ascend

1000 Top of ridge It + 400

2000 Set basalt stone 12 x 8 x 6 ins

8 ins in the ground for 1/6 sec, cor, marked 1/6 on N. face

dug pits 18 x 18 x 12 ins and 3

of stone 5 1/2 ft. diam raised

mound of earth 1 1/2 ft. high,

3 1/2 ft base, over it

Descend

2950 Gulch It - 300

Ascend gradual slope

3800 Summit ridge + 200

Descend gradual slope

4000 Set basalt stone 9 x 8 x 7 ins

6 ins in the ground for 1/4 sec

Subdivision of T. 2 North R. 23 East
Willamette Meridian, Oregon.

(8093-10 M.)

cor marked $\frac{1}{4}$ on W face
 dug pit 18x18x12 ins N & S
 of stone 5 $\frac{1}{2}$ ft diam. raised
 mound of earth 1 $\frac{1}{2}$ ft. high
 3 $\frac{1}{2}$ ft. base over it.
 6000 Deposited charred slate 12 ins
 in the ground for $\frac{1}{16}$ sec
 cor dug pit 18x18x12 ins
 N and S of stone 5 $\frac{1}{2}$ ft diam
 raised mound of earth
 1 $\frac{1}{2}$ ft. high 3 $\frac{1}{2}$ ft. base
 over it and in N pit
 drove stake 2 ft long, 2 ins
 square 12 ins in the ground
 marked $\frac{1}{16}$ on W face
 6500 Guleto It -200
 7500 Top of ridge It +200
 18000 Set basalt stone 10x10x10 ins
 6 ins in the ground for
 Cor to sec 25, 26, 35 and 36
 marked with 1 notch on S

Subdivisions of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

and E edges dug pits.
 18 x 18 x 12 ins in each sec
 5 1/2 ft dia. raised mound
 of earth 2 ft high 4 1/2 ft base
 over it

Land **Wannainans** 8000 chs
 Soil 2nd rate some rocks
 Grass fair.

East on random bet sees 25 and 36
 Va 20° East

4000 Set temporary 1/4 sec cor. and at
 7950 Intersect E bdy of Township
 at cor to sees 25, 36, 30 & 31

Thence West on true line
 Va 21° 45' East

- Descent
- 1225 Dry branch N - 300
- 1250 Begin ascent
- 3100 Ruddleton and La Grande Wagon road N.E.
- 3600 Summit ridge N + 500

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

9975. Set basalt stone 9x8x7 ins
@ ins in the ground for 1/4
sec. cor. marked 1/4 on N face
dug pits 18x18x12 ins E & S
of stone 5 1/2 ft. diam. raised
mound of stone & earth 1 1/2 ft
high. 9 1/2 ft. base over it
Descend gradual slope

7950 for to sec 25, 26, 35 and 36
Land mountainous 7950 chs
Soil 3rd rate considerable
shell rock, Torr. grass

North bet sec 25 and 26
Ta 20 East

1000 Top of ridge It -40
2000 Deposited charred stake 12 ins in
the ground for 1/16 sec. cor.
dug pits 18x18x12 ins N & S
of stake 5 1/2 ft. diam raised
mound of earth 1 1/2 ft high.

Subdivision of T. 2 North R. 98 East

Willamette Meridian, Oregon.

3 1/2 ft base over it and in N pit drove stake 2 ft long 2 ins square 12 ins in the ground marked 1/16 S on W face.

2410 Wagon road N.W.

4000 Deposited charred stake 12 ins in the ground for 1/4 sec. cor. dug pits 18x18x12 ins N & S of stake 5 1/2 ft diam. raised mound of earth 1 1/2 ft high 9 1/2 ft. base over it and in

N. pit drove stake 2 ft long 2 ins square 12 ins in the ground marked 1/4 S on W face.

6000 Deposited charred stake 12 ins in the ground for 1/16 sec. cor. dug pits 18x18x12 ins N & S of stake 5 1/2 ft diam. raised mound of earth 1 1/2 ft high 9 1/2 ft. base over it and in

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

A pit drove stake 2 ft long
 2 ins square 12 ins in the
 ground marked $\frac{1}{6}$ S on N face.
 6850 Wagon road N.W.
 ✓ 8000 Deposited charred stake 12 ins
 in the ground for cor to
 sees 28, 24, 25 and 26 Aug
 pits 18 x 18 x 12 ins in each
 see. 5 $\frac{1}{2}$ ft diam. raised
 mound of earth 2 ft high.
 4 $\frac{1}{2}$ ft base over it and
 in S.E. pit drove stake
 2 ft long 2 ins square
 12 ins in the ground marked
 S 24 on N.E.
 R 33 E S 25 on S.E.
 S 26 on S.W. and S 23 on N.W.
 faces with 2 notches on S
 and 1 notch on E edges
 Land rolling Soil 1st rate
 fair agricultural land

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(M 01-1000)

East on ran bet secs 24 and 25
Pa 18 1/2° East

8000 Set temporary corner at
20, 40 and 60 chains and at
Intersect E bdy of Township 10th
S of cor to secs 24, 25, 19 and 30
Thence S 89° 56' W. on true line

Pa 17° 25' East

2000 Set post 8 ft long, 3 ins square,
24 ins. in the ground for 1/6 sec
cor. marked 1/6 S on N. face
dig pits 18 x 18 x 12 ins E & W.
of post 5 1/2 ft dist raised
mound of earth 1 1/2 ft high
3 1/2 ft base over it.

2150 Enter field adjoining Indian School

2950 Leave same N & S.

3400 Wagon road to Catholic Church N.
about 800 chains

3536 Enter field and garden N & S

4000 Set basal stone 9 x 8 x 4 ins

Subdivisions of T. 2 North R. 83 East
Willamette Meridian, Oregon.

(8093-10 M.)

- 6 ins in the ground near edge
of garden for $\frac{1}{4}$ sec cor.
marked $\frac{1}{4}$ on N face dug
pits 18 x 18 x 12 ins E & W of
stone $5\frac{1}{2}$ ft dist. raised
mound of earth $1\frac{1}{2}$ ft
high $3\frac{1}{2}$ ft base. over it
and from which school building
bears N. W. about 8.00 chains
- 5600 Leads field and garden N & S.
- 6000 Deposited charred stake 12 ins in
the ground for $\frac{1}{6}$ sec cor
dug pits 18 x 18 x 12 ins E & W
of stake $5\frac{1}{2}$ ft dist. raised
mound of earth $1\frac{1}{2}$ ft high
 $3\frac{1}{2}$ ft base over it, and in
E pit drove stake 2 ft long
2 ins square. 12 ins in the
ground marked $\frac{1}{6}$. On N face
School house bears N. E.
- 6650 Ruddleton and Jaynards Wagon road N.

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

8000

for to secs 23, 24, 25 and 26
Land slightly rolling
Soil 1st rate
mostly cultivated.

North to secs 28 and 24

To 18 1/2 East

640 Wagon road S. W.

2000 Deposited charred stake 12 ins
in the ground for 1/16 sec
cor. dug pits 18 x 18 x 12 ins
N and S of stake 5 1/2 ft dist
raised mound of earth 1 1/2 ft
high 3 1/2 ft. base over it
and in N. pit drove stake
2 ft long 2 in square 12 ins
in the ground marked 1/16 S
on W face.

2010 Wagon road N. W.

2309 Boundary of La Grande Wagon road N. W.

2500 Old road S. W.

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

4000 Deposited charred stake 12 ins in
the ground for $\frac{1}{4}$ sec cor.
dug pits 18 x 18 x 12 ins N & S
of stake 5 $\frac{1}{2}$ ft dist, raised
mound of stone and earth
over it 1 $\frac{1}{2}$ ft high 3 $\frac{1}{2}$ ft base
and in N pit drove stake
2 feet long, 2 ins square,
12 ins in the ground marked
 $\frac{1}{4}$ ^S on N face.

4170 Old Wagon road N. W.

6000 Deposited charred stake 12 ins
in the ground for $\frac{1}{16}$ sec
cor. dug pits 18 x 18 x 12 ins
North & S. of stake 5 $\frac{1}{2}$ ft
dist raised mound of
earth 1 $\frac{1}{2}$ feet high 3 $\frac{1}{2}$ ft
base over in and in N pit
drove stake 2 ft long,
2 ins square, 12 ins in
the ground marked

Subdivision of T. 2 North R. 2 East
Willamette Meridian, Oregon.

7510 1/4 Sec. on N. face.
 8000 Hayon road N.W.
 Set post 4 ft long 4 ins square
 24 ins in the ground for cor.
 to sees 13, 14, 23 and 24 marked
 T 2 N S 13 on N.E.
 R 23 E S 24 on S.E.
 S 23 on S.W. and S 14 on N.W.
 faces with 3 notches on S and
 1 notch on E edges. dug pits
 18 x 11 x 12 ins in each see 5 1/2 ft
 dist and raised mound of earth
 2 ft high 4 1/2 ft base over it.
 Land level
 Soil 1st rate, no grass
 East on ran bet sees 19 and 24
 to 20 East
 Set temporary ~~marks~~ cords
 at 20, 40 and 60 chains and at
 8000 Subsect E bdy of Township 18 N S E

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

of cor to sec 18, 19, 13 & 24
Thence S 89°56' West on true
line N on 21 1/4 East.

2000 Set basalt stone 10 x 8 x 7 ins
0 ins in the ground for 1/6 sec
cor. marked 1/6 on N. face
dug pits 18 x 18 x 12 ins
E & W of stone 5 1/2 ft diam
raised mound of earth
1 1/2 ft high 3 1/2 ft base
over it.

2350 Gulch St. -25-

2900 Wagon road N.E.

4000 Deposited charred stake 10 ins
in the ground for 1/4 sec
cor. dug pits 18 x 18 x 12 ins
E & W of stake 5 1/2 ft diam
raised mound of earth
1 1/2 ft high 3 1/2 ft base
over it and in E pit
drove stake 2 ft long.

Subdivisions of T. 2 North R. 38 East
Willamette Meridian, Oregon.

5800

2 ins square, 12 ins in the ground marked $\frac{1}{4}$ S on N face Wagon road N. H.

6000

Drove charred stake 12 ins in the ground for $\frac{1}{16}$ P 20 cor dug pits 18 x 18 x 12 ins E of stake 5 1/2 ft dist, raised mound of earth 1 1/2 ft high 3 1/2 ft base over it and in E pit drove stake 2 ft long 2 ins square 12 ins in the ground marked $\frac{1}{16}$ S on N face.

6000

for to see, 13, 14, 29 and 24
Land mostly level
Soil 1st rate
Grass good
Can all be cultivated

Subdivision of T. 2 North R. 34 East

Willamette Meridian, Oregon.

(8093-10 M.)

North bet sees. 13 and 14
Q. 20° East

2000 Set post 3 ins square 3 ft long
24 ins in the ground for
1/16 sec cor marked 1/16 on
W face. dug pits 18 x 18 x 12
ins N & S of post 5 1/2 ft diam
raised mound of earth 1 1/2 ft
high 3 1/2 ft base over it

3495 Center field E & W.

3955 Leave same

4000 Set post 3 ft long, 3 ins
square, 24 ins in the ground
for 1/4 sec. cor. marked
1/4 on W face. dug pits
18 x 18 x 12 ins N and S of
post 5 1/2 ft diam, raised
mound of earth 1 1/2 ft high
3 1/2 ft base over it

4180 Dry ditch N. Ok.
Acad

Subdivision of T. 2 North R. 29 East

Willamette Meridian, Oregon.

6000 Deposited charred stake 12 ins.
 in the ground for $\frac{1}{16}$ sec cor
 dug pits 18x18x12 ins N & S
 of stake 5 1/2 ft diam, raised
 mound of earth 1 1/2 ft high
 9 1/2 ft base over it and in
 N pit drove stake 2 ft long
 2 ins square. 12 ins in the
 ground marked $\frac{1}{16}$ S on surface.

6455 Wagon road E & St.

8000 Set basalt stone 10x8x7 ins
 6 ins in the ground for
 cor to sec 11, 12, 13 and 14
 marked with 4 notches on
 S and 1 notch on E edges
 dug pits 18x18x12 ins in
 each sec 5 1/2 ft diam, raised
 mound of earth 2 ft high
 4 1/2 ft base over it
 Land gently rolling
 Soil 1st rate partly cultivated

Subdivision of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

(8093-10 M.)

- East on ran bet. secs 12 & 13
 Cor $20^{\circ} 10'$ East
- 7980 Set temporary ~~...~~ cor.
 at 20, 40, and 60 chains and at
 Intersect E. bdy Township 5ths
 N. of cor. to secs 12, 13, 17 & 18
 Thence $N 89^{\circ} 58'$ to true line
 Cor $20^{\circ} \frac{3}{4}'$ East
- 1995 Deposited charred stake 12 ins
 in the ground for $\frac{1}{6}$ sec. cor.
 dug pits 18 x 18 x 12 ins E & W
 of stake $5\frac{1}{2}$ ft. ^{dist} raised
 mound of stone and earth
 $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base over it
 and in E. pair drove stake
 2 ft long, 2 ins square 12 ins
 in the ground marked
 $\frac{1}{6}$ S on N. face
- 2090 Hayon road N.E.
- 3990 Deposited charred stake 12 ins
 in the ground for $\frac{1}{4}$ sec. cor.

Subdivisions of T. 2 North R. 23 East
Willamette Meridian, Oregon.

(11 of 100)

Dug pits 18x18x12 ins. E & W
of stake 5 1/2 ft dia, raised
mound of earth 1 1/2 ft high
3 1/2 ft base over it and in
E pit drove stake 2 ft long
2 ins square 12 ins in the
ground marked 1/4 S
on N. face

5985

Set basalt stone 10x8x7 ins
6 ins in the ground for
1/6 sec. cor. marked 1/16
on N face dug pits 18x18x12 ins
E & W of stake 5 1/2 ft dia
raised mound of earth 1 1/2 ft
high 3 1/2 ft ^{base} over it.

7900

Spring branch 2 lbs. N.

7980

Cor to sees 11, 12, 13 and 14

Land rolling
Soil generally good
can most all be cultivated

18

28

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

North bet sees 11 and 12

on 20' 10" East

425

Thorn thicket E & W

1500

Leave same

1700

Wagon road E & W

2000

Deposited charred stake 12 ins in the ground for 1/4 sec. cor. dug pits 18x18x12 ins N & S of stake 5 1/2 ft. dist, raised mound of earth 1 1/2 ft high 3 1/2 ft base over it and in

✓ A pit drove stake 2 ft long 2 ins square, 12 ins in the ground, marked 1/4 on W face,

3400

Enter Grave yard

3825

Brink of Bluff and leave +20 graveyard

4000

Set boulder rock 8x8x8 ins 6 ins in the ground for 1/4 sec cor. marked 1/4 on W face,

Subdivisions of T. 2 North R. 34 East

Willamette Meridian, Oregon.

(M. 01-5000)

4075
5000
4000

raised mound of stone over it
 O.R. & N. Railway S. Pt.
 Wmatilla river It 100 ft wide
 Set basalt stone 12 x 8 x 6 ins
 8 ins in the ground for
 cor to sees 1, 2, 11 and 12
 marked with 5 notches on
 on S and one notch on
 E edges. and raised
 mound of stone over it
 Land rolling somewhat
 rough
 Soil 2nd rate on rolling
 land 3rd rate in bottom
 Timber Balw Thorns & pine
 along river
 and considerable underbrush
 Grass fair
 Only part of this mile can
 be cultivated

Subdivisions of T. 2 North R. 89 East

Willamette Meridian, Oregon.

(8093-10 M.)

	<p>East on raw per sec 1 and 12 Va $20\frac{1}{4}^{\circ}$ East</p>
P002	<p>Set temporary cons. at 20,408.60 chains and at Intersect E. bdy Township 20ths S of cor to sec 6, 7, 1 and 12 Thence S $89^{\circ} 51'$ on true line Va $19\frac{1}{4}^{\circ}$ East</p>
2000	<p>Deposited charred stake 12 ins in the ground for $\frac{1}{16}$ sec cor, dug pits 18 x 18 x 12 ins E & W of stake $5\frac{1}{2}$ ft dist raised mound of stone $\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base over it and in E pit drove stake 2 ft long, 2 ins square, 12 ins in the ground marked $\frac{1}{16}$ sec on N face</p>
4001	<p>Deposited charred stake 12 ins in the ground for $\frac{1}{4}$ sec cor, dug pits 18 x 18 x 12 ins</p>

Subdivisions of T. 2 North R. 3³ East
 Willamette Meridian, Oregon.

E & W of stake 5 1/2 ft dist
 raised mound of earth
 1 1/2 ft high 3 1/2 ft base
 over it and in E pit drove
 stake 2 ft long 2 ins square
 12 ins in the ground marked
 1/4 on N. face,

6000. Set basalt stone 10x8x8 ins
 6 ins in the ground for
 1/6 sec. cor. marked 1/16 on
 N face. dug pits 18x18x12
 ins E & W of stake 5 1/2 ft
 dist. raised mound of
 earth 1 1/2 ft. high. 3 1/2 ft base
 over it

6150. Fence N & S

7130 Stream 60 lbs S. E.

8002 Cor. to secs. 1, 2, 11, 12

Land rolling Soil 1st rate
 can be cultivated. S of line
 some brush in river bottom

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

North on ran bet sees 172
Qa 20 1/4 East

Set temporary ~~corners~~ corners
at 20, 40 and 60 chains and at

7625 Intersect N. bdy of Township
30 lbs of cor to sees
35, 34, 1 and 2 Thence
S 13' W on true line

1625 Deposited charred stake 12 ins
in the ground for 1/6 sec. cor.
dug pits, 18 x 18 x 12 ins N and S
of stake 5 1/2 ft. dia. raised
mound of earth 1 1/2 ft. high
3 1/2 ft. base over it and in
A pit drove stake 2 ft. long
2 ins square 12 ins in the ground
marked 1/6 on N face

3550 Wagon road S. E.

3625 Set basalt stone 9 x 8 x 7 ins
6 ins in the ground for 1/4
sec. cor, marked 1/4 on

Subdivision of T. 2 North R. 88 East
Willamette Meridian, Oregon.

(M 01-500)

No face dug pits 18 x 18 x 12 ins
N & S of stone 5 1/2 ft dist.
raised mound of earth 1 1/2 ft
high 3 1/2 ft base over it

5625 Set charred stake 12 ins in the
ground. for 1/6 sec. cor. dug
pits 18 x 18 x 12 ins N & S of
stake 5 1/2 ft dist. raised mound
of earth 1 1/2 ft high, 3 1/2 ft base
over it and in N. pit
drove stake 2 ft. long 2 ins
square. 12 ins in the ground
marked 1/6 Tow N. face.

6615 Stream 20 kds. runs west
7625 by to sec 1, 2, 11 and 12

Land rolling. Soil 2nd rate
thickly set with rabbit brush
mostly adapted to cultivation
Little bunch grass.

Subdivisions of T. 2 North R. 83 East

Willamette Meridian, Oregon.

(8093-10 M.)

North bet sec 34 and 35
Go 21° East

650 Draw It -20

1110 Diagon road E It.

2000 Deposited charred stake 12 ins
in the ground for 1/6 sec.
cor. dug pits 18 x 18 x 12 ins
N and S of stake 5 1/2 ft dist
raised mound of earth 1 1/2 ft
high, 3 1/2 ft. base, over it
and in N pit drove stake
2 ft long, 2 ins square,
12 ins in the ground,
marked 1/6 Draw It face.

2970 Enter field S It.

4000 Set basalt stone 12 x 10 x 6 ins
8 ins in the ground for 1/4
sec cor marked 1/4 on
It face dug pits 18 x 18 x 12
ins N and S of cor 5 1/2 ft.
dist and raised mound

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

- of earth 1 1/2 ft high, 3 1/2 ft base over it.
- 4410 fence & Leave field S. W.
- 5350 Drail It.
- 5500 Dry ditch N. W. - 10
- 6000 Deposited charred stake 12 ins in the ground for 1/16 sec. cor dug pits 14x14x12 ins N and S of stake 5 1/2 ft diam raised mound of earth 1 1/2 ft. high 3 1/2 ft. base over it and in N. pit drove stake 2 ft long 2 ins square, 12 ins in the ground marked 1/16 S on It face.
- 8000 Set basalt stone 12x10x8 ins 8 ins in the ground for cor to sees. 26 27, 34 and 35 marked with 1 notch on S. an 2 notches on E edges. and raised mound of stone over it

Subdivisions of T. 2 North R. 99 East
Willamette Meridian, Oregon.

(8093-10 M.)

Land level
Soil 1st rate
Some bunch grass
but closely eaten off.

East on ran bet area 26 & 35
Cor 20° E

Set temporary ~~corners~~ corners
at 20, 40 and 60 chains and at

7940 Intersect N & S line at cor
to area 25, 26, 35 and 36

Place West on true line
by same

1150 Ditch N. H.

1995 Deposited charred stake 12 ins
in the ground for $\frac{1}{4}$ sec. cor.
dug pits 18 x 18 x 12 ins E and W
of stake 5 $\frac{1}{2}$ ft dist raised
mound of earth 1 $\frac{1}{2}$ ft high
9 $\frac{1}{2}$ ft base over it and in
E pit drove stake 2 ft long

Subdivisions of T. 2 North R. 33 East 37
Willamette Meridian, Oregon.

- 3990 2 ins square 12 ins in the ground marked $\frac{1}{4}$ S on N face
Deposited charred stake 12 ins in the ground for $\frac{1}{4}$ sec. cor. dug pits 18x18x12 ins E & W of cor. 5 1/2 ft dist. raised mound of earth 1 1/2 ft high 8 1/2 ft base over it and in E pit drove stake 2 ft long 2 ins square 12 ins in the ground marked $\frac{1}{4}$ S on N face.
- 4650 Wagon road N.E.
- 5500 Center plowed field N & S
- 5985 Deposited charred stake 12 ins in the ground for $\frac{1}{4}$ sec. cor. dug pits 18x18x12 ins E & W of stake 5 1/2 ft dist. raised mound of earth 1 1/2 ft high 9 1/2 ft base over it and in E pit drove stake 2 ft long 2 ins square, 12 ins in the ground

Subdivision of T. 2 North R. 9 East

Willamette Meridian, Oregon.

(8093-10 M.)

- marked $\frac{1}{4}$ S on N face
- 6075 Gave plowed field N & S.
- 7100 Trail N
- 7980 Cox to sec 26, 27, 34 and 35
Land mostly level
Soil 2nd rate
considerable Alkali
- North bet sec 26 and 27
R. 20° East
- 400 Dry bed of creek N. H.
- 1525 Dry bed of creek N. H.
- 2000 Deposited charred stake 12 ins
in the ground for $\frac{1}{4}$ sec. cor.
dug pits 18 x 18 x 12 ins N & S
of stake $5\frac{1}{2}$ ft dist, raised
mound of earth $1\frac{1}{2}$ ft high
 $3\frac{1}{2}$ ft base over it and
in N side drove stake
2 ft long 2 ins square
12 ins in the ground

Subdivisions of T. 2 North R. 99 East
Willamette Meridian, Oregon.

(M 01-500)

- marked $\frac{1}{16}$ Low It face
- 4000 Deposited charred stake 12 ins in the ground for $\frac{1}{4}$ sec cor. dug pits $11 \times 11 \times 12$ ins N & S of stake $5\frac{1}{2}$ ft dist raised mound of earth $1\frac{1}{2}$ ft high $9\frac{1}{2}$ ft base over it and in N pit drove stake 2 ft long 2 ins square 12 ins in the ground marked $\frac{1}{4}$ Low It face
- 6000 Deposited charred stake 12 ins in the ground for $\frac{1}{16}$ sec cor. dug pits $11 \times 11 \times 12$ ins N & S of stake $5\frac{1}{2}$ ft dist raised mound of earth $1\frac{1}{2}$ ft high $9\frac{1}{2}$ ft base over it and in N pit drove stake 2 ft long 2 ins square 12 ins in the ground marked $\frac{1}{16}$ Low It face
- 7900 Wagon road N. E. and S. E.
- 8000 Set post 4 ft long 4 ins square

Subdivisions of T. 2 North R. 29 East
 Willamette Meridian, Oregon.

(8093-10 M.)

24 ins in the ground for
 cor to pces 22, 23, 26 and 27
 marked

S 22 on N.E.

R 29 E S 26 on S.E.

S 27 on S.W. and S 22 on N.W.

faces with 2 notches on
 S and E edges

Dug pits 18 x 18 x 12 ins
 in each sec 5 1/2 ft dist
 raised mound of stone
 and earth 1 1/2 ft high 3 1/2 ft
 base over it

Land level. Soil generally
 1st rate, some rocks

Grass short

Set on raw bet pces 23 and 26

on 20° East

Set temporary ~~...~~ (corrs)
 at 20, 40 and 60 chains and at

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(M 01-500)

7980 Intersect N & S line at cor to secs
23, 24, 25 and 26 Thence
West on true line

to 18 1/2' East

1995 Set post 8 ft long, 8 ins square
24 ins in the ground for 1/16 sec
cor marked 1/16 on N face
dug pits 18 x 18 x 12 ins E & W
of post 5 1/2 ft dist raised
mound of earth 1 1/2 ft high
3 1/2 ft base around post

2410 Hayon road N.

3990 Deposited charred stake 12 ins
in the ground for 1/4 sec cor,
dug pits 18 x 18 x 12 ins. E & W
of stake 5 1/2 ft dist raised
mound of earth 1 1/2 ft high
3 1/2 ft base over it and in
E pit drove stake 2 ft long
2 ins square 12 ins in the
ground marked 1/4 on N face

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

5985 Deposited charred stake 12
ins in the ground for
 $\frac{1}{16}$ sec. cor. dug pit
18 x 18 x 12 ins E & S of
stake 5 $\frac{1}{2}$ ft dist raised
mound of earth 1 $\frac{1}{2}$ ft
high 8 $\frac{1}{2}$ ft base over it
and in E pit drove stake
2 ft long 2 ins square
12 ins in the ground,
marked $\frac{1}{16}$ S on N face

6550 Wagon road

7950 for to sec's 22, 23, 26 & 27

Land level

Soil 1st rate

Well adapted to agriculture

Small rabbit brush

Grass short

Subdivisions of T. 2 North R. 39 East

Willamette Meridian, Oregon.

(11 11-1888)

North bet sec 22 and 23
Co 20' East

2000 Deposited charred stake 12 ins
in the ground for 1/16 sec.
cor. dug pits 18x18x12 ins
N & S of stake 5 1/2 ft dist
raised mound of earth 1 1/2 ft
high 3 1/2 ft base over it
and in N. pit drove
stake 2 ft long 2 ins
square 12 ins in the ground
marked 1/16 S on W face

3925 Dry ditch N. - 10

4000 Set basalt stone 16x12x18
ins 12 ins in the ground
for 1/4 sec. cor. marked 1/4
on N face. dug pits 18x18x12
ins N & S of stone 5 1/2 ft dist
raised mound of earth 1 1/2 ft
high 3 1/2 ft base over it

4750 Wagon road E & N

Subdivisions of T. 2 North R. 23 East

Willamette Meridian, Oregon.

(8093-10 M.)

6000

Deposited charred stake 12 ins in the ground for $\frac{1}{16}$ sec. corner dug pits $18 \times 18 \times 12$ ins in each of stake $5\frac{1}{2}$ ft dist raised mound of earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base over it and in N pit drove stake 2 ft long, 2 ins square, 12 ins in the ground marked $\frac{1}{16}$ S on N. face

8000

Deposited charred stake 12 ins in the ground for cor. to sec. 14, 15, 22 and 23. dug pits $18 \times 18 \times 12$ ins in each sec $5\frac{1}{2}$ ft dist. raised mounds of earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base over it and in S.E. pit drove stake 2 ft long 2 ins square 12 ins in the ground marked T 2 N S 14 on N.E.

Subdivisions of T. 2 North R. 89 East

Willamette Meridian, Oregon.

R 88 E & 28 on S.E.

S 22 on S.W. & 15 on N.W. faces with 3 notches on South and 2 notches on E edges

Land level

Soil 1st rate

Gross short

East on ran bet secs 14 and 28.
 On 20° East

Set temporary corn
at 20, 40 and 60 chains and at
8000 Intersect N & S line at cor
to secs 13, 14, 23 and 24

Thence West on true line
 On same

2000 Set post 9 ft long 3 ins square
24 ins in the ground for 1/16
sec cor. marked 1/16 S on N face
dug pits 11 x 11 x 12 ins E & W
of post 5 1/2 ft dist, raised

Subdivision of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

- mound of earth $1\frac{1}{2}$ ft high,
 $3\frac{1}{2}$ ft base over it.
- 2300 Wagon road N
- 4000 Deposited charred stake 12 ins
 in the ground for $\frac{1}{4}$ sec.
 cor. dug pits $18 \times 18 \times 12$ ins
 E and W of stake $5\frac{1}{2}$ ft
 dist. raised mound of
 earth $1\frac{1}{2}$ ft high. $3\frac{1}{2}$ ft
 base over it and in
 E pit drove stake 2 ft
 long 2 ins square, 12 ins
 in the ground marked
 $\frac{1}{4}$ E on N. face.
- 6000 Deposited charred stake 12 ins
 in the ground for $\frac{1}{6}$ sec.
 cor. dug pits $18 \times 18 \times 12$ ins
 E and W of stake $5\frac{1}{2}$ ft. dist
 raised mound of earth
 $1\frac{1}{2}$ ft high, $3\frac{1}{2}$ ft base,
 over it and in E pit drove

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(M 01-3000)

8000 ✓ stake 2 ft long 2 ins square
 12 ins in the ground
 marked $\frac{1}{16}$ S on N. face.
 for to sees 14, 15, 22 and 23
 Land level
 Soil 1st rate
 Grass short

North bet sees 14 and 15
 Va 20° East

640 Hayon road N.W.
 1000 Same N.E.
 2000 Deposited charred stake 12 ins
 in the ground for $\frac{1}{16}$ sec
 cor., dug pits 18x18x12 ins
 N and S of stake 5 $\frac{1}{2}$ ft dist
 raised mound of earth
 1 $\frac{1}{2}$ ft high, 3 $\frac{1}{2}$ ft base over it
 and in N. pit drove stake
 2 ft long 2 ins square 12 ins
 in the ground marked $\frac{1}{16}$ S on N. face

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10, M.)

3200 Wagon road N. H.
 4000 Deposited charred stake 12 ins
 in the ground for $\frac{1}{4}$ sec. cor.
 dug pits 18 x 18 x 12 ins N & S
 of cor 5 $\frac{1}{2}$ ft dist raised
 mound of earth 1 $\frac{1}{2}$ ft high
 3 $\frac{1}{2}$ ft base over it and in
 N pit drove stake 2 ft
 long 2 ins square 12 ins
 in the ground marked $\frac{1}{4}$ S
 on N. face,

6000 Drove charred stake 12 ins in
 the ground for $\frac{1}{16}$ sec. cor.
 dug pits 18 x 18 x 12 ins N & S
 of stake 5 $\frac{1}{2}$ ft dist. raised
 mound of earth 1 $\frac{1}{2}$ ft high
 3 $\frac{1}{2}$ ft base over it and
 in N. pit drove stake 2 ft
 long, 2 ins square 12 ins
 in the ground marked
 $\frac{1}{16}$ S on N. face

Subdivisions of T. 2 North R. 39 East
Willamette Meridian, Oregon.

Proo Deposited charred stake 12 ins
in the ground for Cor to
secs 10, 11, 14 and 15. dug pits
18 x 18 x 12 ins in each sec.
5 1/2 ft diam. raised mound of
earth 1 1/2 ft high. 3 1/2 ft. base
over it and in N. pit
drove stake 2 ft. long 2 ins
square: 12 ins in the ground
marked

T 2 N S 11 on N. E
R 33 E S 14 on S. E
S 15 on S. W. and S 10 on N. W
faces with 4 notches on S
and 2 notches on E edges
Land. rolling
Soil 1st rate and
well adapted to farming
Grass short

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

- East on ran bet sec 11 & 14
 Va $20\frac{3}{4}^{\circ}$ East
- For temporary ~~mark~~ ~~at~~ ~~sec~~ ~~11~~ ~~12~~ ~~13~~ ~~and~~ ~~14~~ ~~corn~~
 at 20, 40 and 60 chains and at
 7974 Interior N and S line 14 Rs
 N of cor to sec. 11, 12, 13 and 14
 Thence $N 89^{\circ} 54'$ E on true line
- 1850 Hay on road Va $20^{\circ} 10'$ East.
- 1999 Deposited charred stake 12 ins
 in the ground for $\frac{1}{16}$ sec. cor.
 dug pits $18 \times 18 \times 12$ ins E & E of
 of stake $5\frac{1}{2}$ ft. dist. raised
 mound of earth $1\frac{1}{2}$ ft. high
 $9\frac{1}{2}$ ft. base over it and
 in E pit drove stake 2 ft
 long, 2 ins square, 12 ins in
 the ground marked $\frac{1}{16}$ S on
 N face.
- 2725 Lurch N -20
- 3987 For basalt stone $16 \times 10 \times 6$ ins
 16 ins in the ground for $\frac{1}{4}$

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

sec. cor. marked 1/4 on N. face.
dug pits 18 x 18 x 12 ins E & W of
stone 5 1/2 ft dist, raised
mound earth 1 1/2 ft high
3 1/2 ft base over it

5100 Gulch N.E.

5300 Wagon road N.E.

5980 For basalt stone 9 x 8 x 7 ins
6 ins in the ground for 1/6 sec
cor. marked 1/6 on N. face. dug
pits 18 x 18 x 12 ins E & W of stone
5 1/2 ft. dist, raised mound of
earth 1 1/2 ft high 3 1/2 ft base
over it

7200 Wagon road N.

7974 Cor to sees 10, 11, 14 and 15
Land rolling & high
Soil, a kind of ashy or alkali
fine loam 2nd rate
Grass poor.

Subdivision of T. North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

North bet sees 10 and 11

Pa 20³/₄ East

1280 Wagon road E & N.

1490 Brink of bluff 30 ft high
Descend

1590 Spring branch 6 hrs N.

2000 Set basalt stone 16 x 8 x 7 ins
10 ins in the ground for $\frac{1}{6}$ sec
cor. marked $\frac{1}{6}$ on N. face

raised mound of stone over it

3790 Wagon road E & N.

4000 Set basalt stone 10 x 8 x 7 ins

6 ins in the ground, for $\frac{1}{4}$
sec. cor. marked $\frac{1}{4}$ on N. face

Dug pits 18 x 18 x 12 ins E & N.

of stone 5 $\frac{1}{2}$ ft dist. raised
mound of earth 1 $\frac{1}{2}$ ft high.

3 $\frac{1}{2}$ ft base, over it.

5040 O. R. & N. Railway S. N.

* 6750 Umatta river bed. water in channel

7000 Leave same

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(M 01-5305)

* 6000

Set stone -

20 x 16 x 16 ins. 12 ins in the
ground. for 1/4 sec. cor. marked
1/6 on N. face. and raised mound
of stone over it

8000

An alder 5 ins diam. which I mark
T 2 N S 2 on N E

R 33 E S 11 on S E

S 10 on S. Th. and S 3 on N. Th. faces
for cor. to sees 23, 18 & 11 marked
with 5 notches on S and 2 notches
on E edges from which

An Alder 5 ins diam bears N 35° E 4 lks dist.
marked T 2 N R 33 E S 2 B. T.

An alder 4 ins diam. bears S 40° E 2 lks dist.
marked T 2 N. R. 33 E S 11 B. T.

✓ An Alder 5 ins diam. bears S 40° W 2 lks dist
marked T 2 N. R 33 E S 10 B. T.

An alder 5 ins. diam. bears N 45° W 1 lks dist
marked T 2 N. R. 33 E S 3 B. T.

Land rolling, Soil generally 1st rate

Heavy Timber Cottonwood & alder along river
56.70 cts Aug 29th 1887

Subdivisions of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

(8093-10 M.)

- East on ran bet sees 2 and 11.
 Pa 20° East
- Set temporary ~~mark~~ ~~at~~ ~~20~~ ~~and~~ ~~40~~ ~~chains~~ ~~and~~ ~~at~~
 at 20, 40 and 60 chains and at
 7970 Intersect N & E line at cor
 to sees 1, 2, 11 and 12
 Thence West on true line
 Pa 20 $\frac{1}{4}$ ° East
- 1992 Deposited charred stake 12 ins in
 the ground for $\frac{1}{16}$ sec cor.
 dug pits 18x18x12 ins E & W
 of stake $5\frac{1}{2}$ ft. dist raised
 mound of earth $1\frac{1}{2}$ ft high
 3 $\frac{1}{2}$ ft base over it and
 in East pit drove stake
 2 ft long 2 ins square, 12 ins
 in the ground marked
 $\frac{1}{16}$ E on N face.
- 3975 Set post 3 ft long 3 ins
 square 24 ins in the ground
 for $\frac{1}{4}$ sec cor. marked

47
55

Subdivisions of T. 2 North R. 3.3 East

Willamette Meridian, Oregon.

(M 01-500)

$\frac{1}{4}$ Iron N face from which
a Cottonwood 16 ins. diam, bears $N 65^{\circ} E$
54 lks dist, marked $\frac{1}{4} S. B. I.$

A Cottonwood 24 ins diam bears South
32 lks dist, marked $\frac{1}{4} S. B. I.$

5977

~~Deposit~~
Charred stake 12 ins in the
ground for $\frac{1}{6}$ sec, cor. dug pits
18 x 18 x 12 ins E & W of stake
 $5\frac{1}{2}$ ft dist. raised mound of
earth $1\frac{1}{2}$ ft high, $3\frac{1}{2}$ ft base
over it and in E. pit
drove stake 2 ft long, 2 ins
square, 12 ins in the ground
marked $\frac{1}{6}$ Iron N. face.

7900

Spring branch 55 links N.W.

7970

Cor. to secs 2, 3, 10 and 11

Land level

Soil sandy 2nd rate

Dense brush cottonwood 7970 chs

Alder and Thornus

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

North on ran bet Secs 2 & 3

On 20° East

Set temporary $\frac{1}{4}$ sec cor
at 20, 40 and 60 chains and at

75 & 4 Intersect N bdy Township 40 N
E of cor. to secs 2, 3, 4 and 5
Thence S 17° E on true line

On 21° East

15 & 4 Set post 3 ft long 3 ins square
24 ins in the ground for $\frac{1}{16}$
sec cor. marked $\frac{1}{16}$ S on

It face dug pits 18 x 8 x 12 ins
N and S of cor 5 $\frac{1}{2}$ ft. dist
raised mound of stone and
earth 1 $\frac{1}{2}$ ft high 3 $\frac{1}{2}$ ft base
over it.

3000 Wagon road It.

35 & 4 Deposited charred stake 12 ins
in the ground for $\frac{1}{4}$ sec
cor, dug pits 18 x 18 x 12 ins
N and S of stake 5 $\frac{1}{2}$ ft dist

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(M 01-3006)

raised mound of earth $1\frac{1}{2}$ ft
high $8\frac{1}{2}$ ft base over it and
in N. pit drove stake 2 ft
long 2 ins square 12 ins in
the ground marked
 $\frac{1}{4}$ S on N. face
Wagon road W.
5-473 fence and enter field
5-500
5-584 Set post 3 ft long 3 ins square
24 ins in the ground for
 $\frac{1}{16}$ sec. cor. marked $\frac{1}{16}$ S on
N. face dug pits $18 \times 18 \times 12$
ins N & S of post $5\frac{1}{2}$ ft dist.
raised mound of stone and earth
 $1\frac{1}{2}$ ft high $8\frac{1}{2}$ ft. base over
it
7100 Enter brush
7500 Spring branch 20 lbs W.
7584 Cor to secs 2, 3, 10 and 11
Land rolling Soil fair
Brush in bottom

Subdivision of T. 2 North R. 39 East

Willamette Meridian, Oregon.

(8093-10 M.)

North bet sees 39 and 94

Pa 21st East

2000 Deposited charred stake 12 ins
in the ground for $\frac{1}{16}$ sec
cor. dug pits 18 x 18 x 12 ins
N and S of stake $5\frac{1}{2}$ ft dist
raised mound of earth $1\frac{1}{2}$ ft
high, $3\frac{1}{2}$ ft base over it
and in N. pit drove stake
2 ft long 2 ins square
12 ins in the ground marked
 $\frac{1}{16}$ S on N. face.

4000 Deposited charred stake 12 ins
in the ground for $\frac{1}{4}$ sec.
cor. dug pits 18 x 18 x 12 ins
N and S of stake $5\frac{1}{2}$ ft dist
raised mound of earth
 $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base over
it and in N pit drove
stake 2 ft long 2 ins square.
12 ins in the ground marked

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(M 61-600)

- 4000 $\frac{1}{4}$ S on N. face
 Deposited charred stake 12 ins
 in the ground for $\frac{1}{6}$ sec cor
 dug pits 18 x 18 x 12 ins
 N and S of stake $5\frac{1}{2}$ ft dist
 raised mound of earth $1\frac{1}{2}$ ft
 high $3\frac{1}{2}$ ft base over it
 and in N pit drove stake
 2 ft. long, 2 ins square,
 12 ins in the ground marked
 $\frac{1}{6}$ S on N. face.
- 4700 Dry bed of Dudie Willows Creek
 N.E.
- 8000 Set post 4 ft long 4 ins square
 24 ins in the ground, for cor
 to sec 27, 28, 33 and 34 marked
 S 27 on N.E.
 R. 33 E S 34 on S.E.
 S 33 on S.W. and S 28 on N.W. faces
 with notch on S and 3 notches
 on E edges

50
1160

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

dug pits 18 x 18 x 12 ins
in each sec. 5 1/2 ft dist
raised mound of earth 2 ft
high 4 1/2 ft base around
it

Land level Soil rate
Well adapted to agriculture

East on ran bet secs 24 & 24
Pa 20° East

Set temporary ~~line~~
corn at 20, 40, and 60 chains
and at

7950 Intersect N and S line
24 1/2 N of cor to sec
26, 27, 34 and 35 Thence
N 89° 50' West on true line
Pa same

1987 Deposited charred stake 12 ins
in the ground for 1/6 sec
cor, dug pits 18 x 18 x 12 ins

Subdivisions of T. 2 North R. 83 East
 Willamette Meridian, Oregon.

E and W of stake $5\frac{1}{2}$ ft dist
 raised mound of earth $1\frac{1}{2}$ ft
 high, $3\frac{1}{2}$ ft base over it
 and in E pit drove stake
 2 ft long 2 ins square
 12 ins in the ground
 marked $\frac{1}{6}$ S on N. face

2175 Dry ditch N.

3950 Wagon road N

3975 Deposited charred stake 12 ins
 in the ground for $\frac{1}{4}$ sec

cor. dug pits $18 \times 18 \times 12$ ins
 E & W of stake $5\frac{1}{2}$ ft dist
 raised mound of earth $1\frac{1}{2}$ ft
 high $3\frac{1}{2}$ ft base over it
 and in E pit drove stake 2 ft
 long 2 ins square, 12 ins in
 the ground marked $\frac{1}{4}$ S. on
 N. face.

5962 Deposited charred stake 12 ins
 in the ground for $\frac{1}{6}$ sec cor.

Subdivision of T. 2 North R. 38 East

Willamette Meridian, Oregon.

(8093-10 M.)

dug pits 18' x 18' x 12 ins
 @ 1/2 W of stake 5 1/2 ft
 dist raised mound of
 earth 1 1/2 ft high 3 1/2 ft
 base over it and in
 @ pit drove stake 2 ft
 long 2 ins square 12 ins
 in the ground marked
 Mc Don N. face

7850 Indio Willows Creek Dry N. Th.
 7950 Cor to sees 27, 28, 33 and 34
 Land level
 Soil 1st rate
 Grass short

North bet. sees 27 and 28
 @ 200 East

150 Indio Willows creek Dry N. Th.
 1050 Wagon road @ N. Th.
 2000 Set post 2 ft long 3 ins
 square 2 4 ins. in the ground

Subdivision of T. 2 North R. 28 East

Willamette Meridian, Oregon.

(M. 01-2000)

for 1/16 sec. cor. dug pits
18 x 18 x 12 ins N and S of
stake 5 1/2 ft. dist. raised
mound of earth 1 1/2 ft high
8 1/2 ft base over it.

4000 Deposited charred stake 12 ins in
the ground for 1/4 sec. cor.
dug pits 18 x 18 x 12 ins N & S
of stake 5 1/2 ft. dist. raised mound
of earth 1 1/2 ft high 8 1/2 ft base
over it and in N pit drove
stake 2 ft long 2 ins square
12 ins in the ground marked
1/4 Sec. E. face.

4800 Wagon road E & W.

6000 Deposited charred stake 12 ins
in the ground for 1/16 sec. cor.
dug pits 18 x 18 x 12 ins N & S of
stake 5 1/2 ft dist. raised mound
of earth 1 1/2 ft high 8 1/2 ft base
over it and in N pit drove

Subdivisions of T. 2 North R. 28 East
Willamette Meridian, Oregon.

(8093-10 M.)

6875
2000

stake 2 ft long 2 ins square
12 ins in the ground marked
1/6 S on N. face.

Wagon road N.W.

Set post 4 ft long, 4 ins
square, 24 ins in the ground
for cor to sec 21 22 27 and 28
marked

S 21 on S.E. and S 22 on N.E.
R 23 on S.E. and S 27 on S.E.
S 28 on S.W. and S 21 on N.W.

faces with 2 notches on S
and 8 notches on E. edges
dug pits 18x18x12 ins in each
sec, 5 1/2 ft. dist, raised
mound of earth 2 ft high
4 1/2 ft base over in
Land level

Soil 1st rate Poor grass
well adapted to agriculture

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(M 01-6000)

Cast on ^{random} ~~set~~ sees 22 & 24
Pa 19 3/4 East

Set temporary ~~marks~~ ~~see~~ cor
at N. 20. 40. and 60 chains and at

7980 Interset stand & line at cor
to sees 22, 23, 26 and 27

Thence West on true line
Pa 20 East

450 Wagon road N & S.

1995 Deposited charred stake 12 ins in
the ground for 1/16 sec. cor.
dug pits 18 x 11 x 12 ins E & W
of stake 5 1/2 ft dist. raised mound
of earth 1 1/2 ft high 8 1/2 ft base
over it and in E pit drove
stake 2 ft long, 2 ins square
12 ins in the ground marked
1/16 S on N face.

3925 Dry ditch E by N.W.

3990 Set basalt stone 16 x 12 x 8 ins
10 ins in the ground for 1/4 sec

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

cor marked 1/4 on N face
dug pits 18 x 18 x 12 ins E of
of stone 5 1/2 ft. dist and
raised mound of stone and
earth 1 1/2 ft high 8 1/2 ft base
over it

5230

Gulch N

-20

5985

Set basalt stone 10 x 9 x 8 ins
6 ins in the ground for 1/4
sec cor, marked 1/6 on N face
dug pits 18 x 18 x 12 ins E of
of cor 5 1/2 ft dist. raised
mound of earth 1 1/2 ft high
8 1/2 ft base over it

7980

for to secs 21, 22, 27 and 28
Land rolling
Soil 1st rate
Bunch grass fair
all good agricultural land

Subdivisions of T. 2 North R. 23 East
Willamette Meridian, Oregon.

(11 of 100)

North br sees 21 and 22
Jan 1904¹⁵ East

264
2000
Dragon road N.E.
Set post 8 ft. long 8 ins square
24 ins in the ground for
1/6 sec. cor. marked 1/16 on
N face. dug pits 18x18x12 ins
N and S of post 5 1/2 ft dist.
and raised mound of earth
1 1/2 ft high 3 1/2 ft base around
it.

3450
Dry ditch N.W.

4000
Set basalt stone 9x8x7 ins
6 ins in the ground for 1/4
sec. cor. marked 1/4 on N face
dug pits 18x18x12 ins N and S
of stone 5 1/2 ft dist. raised
mound of earth 1 1/2 ft high.
3 1/2 ft base over it

5800
Foot of hill
Ascend

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

6000

Top of hill E & W and set +100
post 3 ft long 2 ins square
24 ins in the ground for $\frac{1}{16}$
sec. cor, marked $\frac{1}{16}$ S on W face
dug pits 18 x 18 x 12 ins N and S
of cor 5 $\frac{1}{2}$ ft dist and raised
mound of earth 1 $\frac{1}{2}$ ft high
3 $\frac{1}{2}$ ft base around it

7600

Wagon road E and W

8000

Deposited charred stake 12 ins. in
the ground for cor. to sec 15, 16,
21 and 22 dug pits 18 x 18 x 12 ins
in each sec 5 $\frac{1}{2}$ ft dist, raised
mound of earth 2 ft high 4 $\frac{1}{2}$
ft base over it and in S.E.
pit drove stake 2 ft long 2 ins
square 12 ins in the ground marked
T 2 N S 15 on N.E.
R 33 E S 22 on S.E.
S 21 on S of and S 16 on N.W. face
with 8 notches on S and E edges

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

Land mostly level
Soil 1st rate
All suited for agriculture

East on ran per sees. 15 and 22
Ra 20 1/4 East

8020 Set temporary ~~marks~~ ~~corns~~ ~~corns~~
at 20, 40 and 60 chains and at
Intersect N & S line 15-fts S
of cor to sees 14, 15, 22 and 23
Thence S 89° 58' W on true line
Ra 20° East

690 Wagon road N.E.
2005 Deposited charred stake 12 ins in
the ground for 1/16 sec cor.
dug pits 18x18x12 ins E & W
of stake 5 1/2 ft. dist raised
mound of earth 1/2 ft. high
3 1/2 ft base over it and in
E pit drove stake 2 ft long
2 ins square 12 ins in the ground

Subdivisions of T. 2 North R. 28 East

Willamette Meridian, Oregon.

(8093-10 M.)

- marked $\frac{1}{16}$ S on N. face.
- 4010 Deposited charred stake 12 ins
in the ground for $\frac{1}{4}$ sec
cor. dug pits 18 x 18 x 12 ins
E and W of stake $5\frac{1}{2}$ ft dist
raised mound of stone and
earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base
over it and in E pit drove
stake 2 ft. long 2 ins square
12 ins in the ground marked
 $\frac{1}{4}$ S on N. face.
- 6015 Deposited charred stake 12 ins
in the ground for $\frac{1}{16}$ sec cor.
dug pits 18 x 18 x 12 ins E & W
of stake $5\frac{1}{2}$ ft. dist. raised
mound of earth $1\frac{1}{2}$ ft high
 $3\frac{1}{2}$ ft base over it and in
E pit drove stake 2 ft long
2 ins square 12 ins in the
ground marked $\frac{1}{16}$ S on
N. face

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(20 05-000)

7500

Wagon road N.E.

8020

Cor to sec. 15, 16, 21 and 22

Land level, soil 1st rate

All good agricultural land

North lot sec 15 and 16

On 20 1/4 East

2000

Drove charred stake 12 ins in the ground for 1/16 sec. cor. dug pits 18x18x12 ins N and S. of stake 5 1/2 ft. dist. raised mound of earth 1 1/2 ft high 3 1/2 ft base over it and in N pit drove stake 2 ft long 2 ins square, 12 ins in the ground marked 1/16 S on N face.

4000

Deposited charred stake 12 ins in the ground for 1/4 sec. cor. dug pits 18x18x12 ins N & S of stake 5 1/2 ft dist, raised mound of earth 1 1/2 ft high 3 1/2 ft.

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

base over and in N. pit
drove stake 2 ft. long, 2 ins
square, 12 ins in the ground
marked $\frac{1}{4}$ S on N face.

6000 Deposited charred stake 12 ins
in the ground for $\frac{1}{16}$ sec
cor. dug pits 18 x 12 x 12 ins N & S
of stake $\frac{5}{8}$ ft dist, raised
mound of earth $\frac{1}{2}$ ft high,
 $\frac{3}{4}$ ft base over it and in
N pit drove stake 2 ft long
2 ins square 12 ins in the ground
marked $\frac{1}{16}$ S on N face

7950 Dragon road N.

7880 Spring branch N.E.

8000 Set post 4 ft long 4 ins
square, 24 ins in the ground
for cor to sec 9, 10, 15 and 16
marked

T 2 N S 10 on N.E.
R 33 E S 15 on S.E.

Subdivisions of T. 2 North R. 23 East
Willamette Meridian, Oregon.

T 16 on T 9 and T 9 on N.W. faces
with 4 notches on T and 3 notches on E
edges, dug pits 18x18x12 ins
in each sec. 5 1/2 ft diam. raised
mound of earth 2 ft high
4 1/2 ft base around it
Land level

Soil 1st rate
All good farming land

East on raw bet secs 10 & 15
Va 20 1/2 East

Set temporary ~~by~~ ^{at} ~~the~~ ^{the} ~~corners~~ ^{corners}
at 20, 40, and 60 chains and at
7980 Intersect N & S line 20 ths N of cor
to sec 10, 11, 14 & 15 thence
N 89° 51' N on true line
Va 20 3/4 East

1995 Deposited charred stake 12 ins in
the ground for 1/4 sec cor.

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

dug pits $18 \times 18 \times 12$ ins E & W of
 stake $5\frac{1}{2}$ ft. dist. raised mound
 of earth $1\frac{1}{2}$ ft high $9\frac{1}{2}$ ft. base.
 over it and in E pit
 drove stake 2 ft. long, 2 ins
 square 12 ins in the ground
 marked $\frac{1}{16}$ on N. face.

3990 Deposited charred stake 12 ins
 in the ground for $\frac{1}{4}$ sec. cor.
 dug pits $18 \times 18 \times 12$ ins E & W
 of stake $5\frac{1}{2}$ ft. dist. raised
 mound of earth $1\frac{1}{2}$ ft high
 $9\frac{1}{2}$ ft. base, over it and in
 E pit drove stake 2 ft long,
 2 ins square, 12 ins in the ground
 marked $\frac{1}{4}$ Tow N face

4275 Gulch North 70

5985 Deposited charred stake 12 ins in
 the ground for $\frac{1}{16}$ sec. cor.
 dug pits $18 \times 18 \times 12$ ins E & W
 of stake $5\frac{1}{2}$ ft dist

Subdivisions of T. 2 North R. 88 East
Willamette Meridian, Oregon.

raised mound of earth 1 1/2 ft high
3 1/2 ft base (over it and in E pit
drove stake 2 ft long 2 ins square
12 ins in the ground marked
1/6 S on N. face

7980 Cor to sec. 9, 10, 15 and 16

Land rolling gently sloping to N.
Soil light and ashy Ind rate

North bet sec 9 and 10.

Run 28 1/2° East

2000

Deposited charred stake 12 ins in
the ground for 1/6 sec. cor. dug
pits 18 x 18 x 12 ins N and S
of stake 5 1/2 ft dist raised
mound of earth 1 1/2 ft high
3 1/2 ft base over it and in
N pit drove stake 2 ft long
2 ins square, 12 ins in the ground
marked 1/6 S on N. face.

2825

Wagon road E and S.

Subdivisions of T. 2 North R. 23 East

Willamette Meridian, Oregon.

(8093-10 M.)

- 3175 Brush & edge of Bluff 20 ft high
- 3975 Spring branch 10 lbs runs N.
- 4000 Set basalt stone 17 x 5 x 7 ins
12 ins in the ground for
1/4 sec. cor. marked 1/4 on
N. face dug pits 18 x 18 x 12
ins N & S of stone 5 1/2 ft
dist raised mound of earth
1 1/2 ft. high 3 1/2 ft base over it
from which
A Balu 10 ins diam bears S 40° E
- 57.55
6000 83 lbs dist marked 1/4 S. B. T.
Rail Road runs E & W.
Set post 3 ft long, 3 ins square
24 ins in the ground for 1/6
sec. cor. marked 1/6 S on N.
face dug pits 18 x 18 x 12 ins
N & S of post, 5 1/2 ft dist,
raised mound of earth 1 1/2 ft
high 3 1/2 ft base around it,
- 7825 Umatilla river 100 lbs S. N.
- 8000 Set stone (boulder) 14 x 12 x 10 ins

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

9 ins in the ground for corners
3, 4, 9 and 10 marked with 5 notches
on S and 3 notches on E edges
from which

A Willow 14 ins diam bears N 80° E 35 kts dist
marked T 2 N S 3 B. T.

A Balun 6 ins diam bears S 10° E 50 kts dist
marked R 33 E S 10 B. T.

A Balun 12 ins diam bears N 40° W 112 kts dist
marked T 2 N R 33 E S 4 B. T.

no other tree in limits raised
mound of stone over cor.

Land mostly bottom

Soil 2nd rate some gravel

Heavy Cottonwood & underbrush 48. chs

East on ran bet pres 3 and 10

va 20 1/2 East

Set temporary ~~lines~~ (corners)
at 20, 40, and 60 chains and at

7990

Intersect N & S line at cor to
secs 2, 3, 10 and 11 Thence

Subdivisions of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

(8093-10 M.)

West on true line.

Co 20° East

Through dense brush

2800

Amatilla river bed N.E. 100 lbs

3995

Set boulders stone 14 x 8 x 6 ins

10 ins in the ground for 1/4 sec

cor marked 1/4 on N face

from which

A balm 26 ins diam bears 334 1/2° N

332 lbs dist marked 1/4 S.B.T.

no other trees in limits raised

mounds of stone 1/2 ft high,

3 1/2 ft base, aimed corners

6800

Amatilla river S.E. by E

7990

Cor to sec. 3, 4, 9 and 10

Land bottom soil 2nd and 3rd rate

Heavy Timber balm cherry and pine 7990

Subdivisions of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

North on ran bet sees 3 and 4
 Pa 20 1/2 East

7570 Set temporary ~~...~~ corrs.
 at 20, 40 and 60 chains and at
 Intersect N bdy. Township 20ths
 E of cor to sees 3, 4, 33 and 34
 Thence S 9' East on true line

1576 Set basalt stone 10 x 8 x 6 ins
 6 ins in the ground for 1/16 sec cor
 marked 1/16 on N. face. dug
 pits 18 x 18 x 12 ins N & S of stone
 5 1/2 ft diam. raised mound of
 earth 1 1/2 ft high, 3 1/2 ft base
 over it.

3520 Know S. W. - 100

3570 Deposited charred stake 12 ins
 in the ground for 1/4 sec cor.
 dug pits 18 x 18 x 12 ins N & S
 of stake 5 1/2 ft diam. raised mound
 of earth 1/2 ft high 3 1/2 ft base over it

Subdivisions of T. 2 North R. 38 East

Willamette Meridian, Oregon.

(8093-10 M.)

and in N pit drove stake
2 ft long 2 ins square
12 ins in the ground marked
 $\frac{1}{4}$ S on N face.

Ascend

4850 Bluff rock facing S + 10 ft

4800 Hayon road E & W.

4900 Fence & enter field

5570 Deposited charred stake 12 ins
in the ground for $\frac{1}{16}$ sec
cor. dug pits 11 x 11 x 12 ins
N and S of stake 5 $\frac{1}{2}$ ft
diam. raised mound of
earth 1 $\frac{1}{2}$ ft high 3 $\frac{1}{2}$ ft
base over it and in
N pit drove stake 2 ft
long 2 ins square 12 ins
in the ground marked
 $\frac{1}{16}$ S on W face

5600 Yard fence & leave field E & W

5750 House bears E 12 ft

Subdivisions of T. 2 North R. 30 East
Willamette Meridian, Oregon.

- 6020 House bears 8 58 links
 - 6300 Well 10 ft deep
 - 6400 Garden 8 ft
 - 7570 Cor to sec. 3, 4, 9 and 10
- Land N 1/2 rolling South 1/2 level
fair agricultural land
Soil 1st rate
Timber haw & pine in bottom

North bet sec 32 and 39
Row 20 East

- 2000 Deposited charred stake 12 ins
in the ground for 1/16 sec. cor.
dug pits 11 x 11 x 12 ins N & S
of stake 5 1/2 ft dist. raised mound
of earth 1 1/2 ft high 3 1/2 ft base
over it and in N. pit drove
stake 2 ft. long, 2 ins square
12 ins in the ground marked
1/16 S on N. face.
- 2600 Draw N.E.

Subdivisions of T. 2 North R. 38 East
Willamette Meridian, Oregon.

(8093-10 M.)

4000. Deposited charred stave 12 ins
in the ground for $\frac{1}{4}$ sec.
cor. dug pits 18x18x12
ins N and S of stave
5 $\frac{1}{2}$ ft dist. raised mound
of earth 1 $\frac{1}{2}$ ft high, 3 $\frac{1}{2}$ ft.
base over it, and in
N pit drove stave 2 ft
long, 2 ins square 12 ins
in the ground marked
 $\frac{1}{4}$ S on N. face.

6000 Deposited charred stave 12 ins
in the ground for $\frac{1}{16}$ sec. cor.
dug pits 18x18x12 ins
N and S of stave 5 $\frac{1}{2}$ ft dist.
raised mound of earth 1 $\frac{1}{2}$ ft
high, 3 $\frac{1}{2}$ ft. base over it.
And in N pit drove stave
2 ft long, 2 ins square, 12 ins
in the ground marked
 $\frac{1}{16}$ S on N. face.

Subdivisions of T. 2 North R. 38 East
Willamette Meridian, Oregon.

8000

Deposited charred stake 12 ins
in the ground for cor. to
222, 28, 29, 32 and 33, dug
pits 18x18x12 ins in each
222, 5 1/2 ft dist, raised mound
of earth 2 ft high 4 1/2 ft base
over it and in S.E. pit drove
stake 2 ft long, 2 ins square,
12 ins in the ground marked
T 28 on N.E.
R 33 on S.E.
T 32 on S.W. and T 29 on N.W. faces
with notch on T and H notches
on E edges,
Land Level
Considerable rabbit brush
Soil a kind of ashy, white
sandy nature 1/2 in rate
Some Alkali

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

	East on raw bet sec 28 & 33 Va 21° East
	For temporary line , cons at 28, 46, and 60 chains and at
1000.	Intersect N and S line 20 lbs N of cor. to sec 27, 28, 33 & 34 Thence N 89° 51' W on true line Va same
200	Indie willows ^{creek} N.
350	House bears S about 200 lbs.
2000	Deposited charred stake 12 ins in the ground for 1/6 sec cor dug pits 18 x 18 x 12 ins E & W of stake 5 1/2 ft dist raised mound of stone and earth 1 1/2 ft high 8 1/2 ft base over it and in E pit drows stake 2 ft long 2 ins square 12 ins in the ground, marked 1/16 S on N. face.

Subdivisions of T. 2 North R. 28 East
 Willamette Meridian, Oregon.

4500

Deposited charred stake 12 ins
 in the ground for $\frac{1}{4}$ sec. cor.
 dug pits 18 x 18 x 12 ins E & W
 of stake 5 $\frac{1}{2}$ ft dia raised
 mound of earth 1 $\frac{1}{2}$ ft high
 3 $\frac{1}{2}$ ft base over it and
 in E pit drove stake 2 ft
 long 2 ins square 12 ins in
 the ground marked $\frac{1}{4}$ S on
 N. face.

6000

Drove charred stake 12 ins
 in the ground for $\frac{1}{6}$ sec. cor.
 dug pits 18 x 18 x 12 ins
 E and W of stake 5 $\frac{1}{2}$ ft dia
 raised mound of earth
 1 $\frac{1}{2}$ ft. high, 3 $\frac{1}{2}$ ft. base over
 it and in E pit drove stake
 2 ft. long 2 ins square 12 ins
 in the ground marked
 $\frac{1}{6}$ S on N. face.

7000

Cor to sec 28, 29, 32 and 38

Subdivisions of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

(8093-10 M.)

Land mostly level
 Soil 2nd rate
 Considerable Alkali

North lot sees 28 and 29
 on 21° East

500 Wagon road S. Th.

2000 Deposited charred stake
 12 ins in the ground for
 $\frac{1}{6}$ sec. cor. dug pits 18x18x12
 ins N and S of stake $5\frac{1}{2}$ ft
 dist raised mound of earth
 $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base over
 it and in the N. pit drove
 stake 2 ft long, 2 ins square
 12 ins in the ground
 marked $\frac{1}{6}$ S on N. face.

3200 Dry ditch N. Th.

3275 Wagon road N. Th.

4000 Deposited charred stake 12 ins
 in the ground for $\frac{1}{4}$ sec. cor.

Subdivisions of T. 2 North R. 30 East

Willamette Meridian, Oregon.

dug pits 18 x 18 x 12 ins N and S of stake 5 1/2 ft diam. raised mound of earth 1 1/2 ft high 3 1/2 ft base over it, and in N pit drove stake 2 ft long 2 ins square 12 ins in the ground marked 1/4 S on N face.

6000

Deposited charred stake 12 ins in the ground, for 1/16 S on cor. dug pits 18 x 18 x 12 ins N and S of stake 5 1/2 ft diam raised mound of earth 1 1/2 ft high 3 1/2 ft base over it and in N pit drove stake 2 ft long 2 ins square 12 ins in the ground marked 1/16 S on N face

4575

Spring branch 3 lks

- 10

7800

Fence to leave field

ascend gradual slope.

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

8000

Set post 4 ft. long 4 ins square
 24 ins in the ground for
 cor to sees 20, 21, 28 & 29
 marked

Set S 21 on N.E.

R 33 E S 28 on S.E.

S 29 on S.W. and S 20 on N.W.

faces, with 2 notches on
 S and 4 notches on E edges
 dug pits 18 x 18 x 12 ins in
 each see 5 1/2 ft dist, raised
 mounds of earth 2 ft high
 4 1/2 ft base around post
 Land level

Soil 1st rate

Good agricultural land

Cast on raw bar sees 21 & 28

Bar 20° East

Set temporary 2 1/2 x 2 1/2 x 2 1/2 cor
 at 20, 40, and 60 chains and at

Subdivisions of T. 2 North R. 28 East
Willamette Meridian, Oregon.

- 8000 Intersect N & S line at cor
to sees 21, 22, 27 and 28
Thence West on true line
Ora 19⁰⁴ East
- 3000 Wagon road N.
- 2000 Deposited charred stake 12 ins
in the ground for $\frac{1}{16}$ sec cor
and dug pits 18 x 18 x 12 ins
E and W of stake 5 $\frac{1}{2}$ ft
diam. raised mound of earth
1 $\frac{1}{2}$ ft high 3 $\frac{1}{2}$ ft base over
it and in E pit drove
stake 2 ft long 2 ins
square 12 ins in the ground
marked $\frac{1}{16}$ Sec N. face
- 2440 Fence and Enter field N. N.
- 4000 Drove charred stake 12 ins in
the ground, for $\frac{1}{4}$ sec cor.
dug pits 18 x 18 x 12 ins E & W
of stake 5 $\frac{1}{2}$ ft diam raised
mounds of stone and earth

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

1 1/2 ft high 3 1/2 ft base over it
and in E pit drove stake 2 ft
long, 2 ins square, 12 ins in
the ground marked 1/4 S on
N face.

6000 Deposited charred stake 12 ins
in the ground for 1/6 sec. cor.
dug pits 18 x 18 x 12 ins E & W
of stake 5 1/2 ft dist. raised
mound of earth 1 1/2 ft high.
3 1/2 ft base over it and in E pit
drove stake 2 ft long, 2 ins
square, 12 ins in the ground
marked 1/4 S on N face.

7880

Fence N.E. and leave field

8000

Log to sees 28, 21, 28 and 29

Land level

Soil 1st rate

Well adapted to agriculture

Subdivisions of T. 2 North R. 98 East
 Willamette Meridian, Oregon.

Northber sees 20721
 Va 20° East

1350 Road E & H
 2000 Deposited charred stake 12 ins in
 the ground for $\frac{1}{4}$ sec. cor. dug
 pits 14x14x12 ins N & S of stake
 5 $\frac{1}{2}$ ft. dist. raised mound of
 earth 1 $\frac{1}{2}$ ft. high, 3 $\frac{1}{2}$ ft base
 over it and in N. pit drove
 stake 2 ft. long, 2 ins square
 12 ins in the ground marked
 $\frac{1}{4}$ S on W. face.

2100 Wagon road E & H.

3960 Old ditch fence N. E.

4000 Deposited charred stake 12 ins
 in the ground for $\frac{1}{4}$ sec. cor.
 dug pits 14x18x12 ins N & S of
 stake 5 $\frac{1}{2}$ ft dist. raised mound
 of earth 1 $\frac{1}{2}$ ft high 3 $\frac{1}{2}$ ft base
 over it and in N. pit drove stake
 2 ft long 2 ins (square) 12 ins in

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

- the ground marked $\frac{1}{4}$ Section
N. face.
- 5000 Judie Willows creek 5 kts. N.
ascend.
- 6000 Top of hill and Deposited charred ⁺¹⁰⁰
stake 12 ins in the ground
for $\frac{1}{16}$ sec. cor. dug pits 18x18x12
ins N and S of stake $5\frac{1}{2}$ ft
dist. raised mound of earth
 $1\frac{1}{2}$ ft. high, $3\frac{1}{2}$ ft. base
over it and in North pit.
Drove ~~stake~~ post 2 ft long
2 ins square 12 ins in the ground
marked $\frac{1}{16}$ Section N. face.
- 7000 Deposited charred stake 12 ins
in the ground for cor to secs.
16, 17, 20 and 21 dug pits
18x18x12 ins in each sec $5\frac{1}{2}$ ft
dist raised mound of earth
2 ft high $4\frac{1}{2}$ ft base over it
and in S.E. pit drove stake

Subdivisions of T. 2 North R. 99 East.
Willamette Meridian, Oregon.

2 ft long 2 ins square 12 ins in
the ground marked
T 2 N S 16 on N.E.
R 99 E S 21 on S.E.
S 20 on S.W. and S 17 on N.W.
faces with 3 notches on S and 4
notches on E edges

Land rolling
Soil 1st rate on high rolling land
but poor on lower land

East on ran bet sees 16 and 21
On 21° East

Set temporary ~~corners~~ corners
at 20, 40 and 60 chains and at
1960 Intersect N & S line 45 rods N of
cor to sees 15, 16, 21 and 22

Thence N 29° 40' W on true line
On 20 1/4° East

1990 Deposited charred stake 12 ins
in the ground for 1/16 sec. cor.

Subdivisions of T. North R. 93 East
Willamette Meridian, Oregon.

(8093-10 M.)

3980

Dug pits 18 x 18 x 12 ins E & W of stake 5 1/2 ft dist raised mound of earth 1 1/2 ft high 3 1/2 ft base over it and in E pit drove stake 2 ft long 2 ins square 12 ins in the ground marked 1/16 S on N. face,

5970

Deposited charred stake 12 ins in the ground for 1/4 sec. cor. dug pits 18 x 18 x 12 ins E & W of stake 5 1/2 ft. dist raised mound of earth 1 1/2 ft high, 3 1/2 ft base over it and in E pit drove stake 2 ft long, 2 ins square, 12 ins in the ground marked 1/4 S on N. face,

Deposited charred stake 12 ins in the ground for 1/16 sec cor. dug pits 18 x 18 x 12 ins E & W of stake 5 1/2 ft. dist. raised mound of earth 1 1/2 ft high 3 1/2 ft. base, over it and in

Subdivisions of T. 2 North R. 39 East 95
Willamette Meridian, Oregon.

7960
 E pit drove stake 2 ft long 2 ins square, 12 ins in ground marked $\frac{1}{16}$ S on N face
 (on to sees) 16, 17, 20 and 21
 Land mostly level
 Soil 1st rate
 Good farming land

Aug. 30th 1887,
 North bet sees 16 and 17
 Ra 21st East

2000
 Deposited charred stake 12 ins in the ground for $\frac{1}{16}$ sec cor.
 dug pits 18 x 18 x 12 ins N & S of stake 5 1/2 ft diam raised mound of earth 1/2 ft high 3 1/2 ft base over it and in N pit drove stake 2 ft long 2 ins square 12 ins in the ground marked $\frac{1}{16}$ S on N face
 2550
 Puddlow and La Grande wagon road N. N.

Subdivisions of T. North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

- 4000 Deposited charred stake 12 ins in the ground for $\frac{1}{4}$ sec. cor. dug pits 18 x 18 x 12 ins N & S of stake $5\frac{1}{2}$ ft dist, raised mound of earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base over it and in N. pit drove stake 2 ft long 2 ins square 12 ins in the ground marked $\frac{1}{4}$ S on N face
- 6000 Deposited charred stake 12 ins in the ground for $\frac{1}{16}$ sec. cor. dug pits 18 x 18 x 12 ins N and S of stake $5\frac{1}{2}$ ft dist raised mound of earth $1\frac{1}{2}$ ft high, $3\frac{1}{2}$ ft base, over it and in N. pit drove stake 2 ft long, 2 ins square 12 ins in the ground marked $\frac{1}{16}$ S on N. face
- 6800 Old Emigrant road N. H. descend gradually

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

Good

Set post 4 ft long, 4 ins square,
 24 ins in the ground for cor
 to sees 9, 16 and 17 marked
 9 on N.E.
 16 on S.E.
 17 on S.W. and 9 on N.W.
 faces with 4 notches on S
 and E edges dug pits
 18 x 18 x 12 ins in each see
 5 1/2 ft dia raised mound of
 earth 2 ft high 4 1/2 ft base
 around cor.
 Liquid level or nearly so
 Soil 1st rate
 Some Bush grass

East on ran bet sees 9 and 16
 on a 21° East

Set temporary ~~...~~ corner
 at 20, 40, & 60 chains and at

Good

Intersect N & S line 70 lbs

Subdivisions of T. 2 North R. 28 East

Willamette Meridian, Oregon.

(8093-10 M.)

At of cor. to sees 9, 10, 15 & 16
Thence N 89° 30' W on true line
to a 20 1/2' Post

225 Dry ditch N. W.
350 Wagon road N. W.
650 Wagon road N. W.
2000 Deposited charred stake 12 ins
in the ground for 1/16 sec. cor.
dug pits 18 x 18 x 12 ins E & W
of stake 5 1/2 ft dia. raised
mound of earth 1 1/2 ft
high 9 1/2 ft. base over it
and in E pit drove stake
2 ft long 2 ins square.

12 ins in the ground marked
1/16 E on N face.

4000 Deposited charred stake 12 ins in
the ground for 1/4 sec. cor.
dug pits 18 x 18 x 12 ins E & W
of stake 6 1/2 ft dia. raised
mound of earth 1 1/2 ft high

Subdivisions of T. 2 North R. 3 3 East

Willamette Meridian, Oregon.

3 1/2 ft base over it and in
E pit drove stake 2 ft
long 2 ins square 12 ins
in the ground marked 1/4
S on N. face.

4125

Gulch N

- 50

4130

Wagon road N

6000

Deposited charred stake 12 ins
in the ground for 1/16 sec. cor.
dug pits 18 x 18 x 12 ins E & N
of stake 5 1/2 ft dia raised mound
of earth 1 1/2 ft high, 3 1/2 ft base
over it and in E pit drove
stake 2 ft long, 2 ins square
12 ins in the ground marked
1/16 S on N. face

good

Cor to Secs 8, 9, 16 and 17
Land slightly rolling
Soil 2nd rate
Some Alkali
fair agricultural land

98
100

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

North bar 2000 8 and 9
Va 21° East

2000 Deposited charred stake 12 ins
in the ground for $\frac{1}{16}$ sec cor
dug pits 11 x 18 x 12 ins N & S
of stake $5\frac{1}{2}$ ft dia raised
mound of earth $1\frac{1}{2}$ ft high
 $8\frac{1}{2}$ ft base over it and
in N pit drove stake 2 ft
long, 2 ins square, 12 ins
in the ground marked $\frac{1}{16}$
S on W. face.

2450 Wagon road to Agency N.E.

3500 Wagon road to Agency N.E.

4000 Deposited charred stake 12 ins
in the ground for $\frac{1}{4}$ sec. cor.
dug pits 11 x 18 x 12 ins
N & S of stake $5\frac{1}{2}$ ft dia
raised mound of earth
 $1\frac{1}{2}$ ft high $8\frac{1}{2}$ ft base over it
and in N. pit drove stake

Subdivision of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

2 ft long, 2 ins square, 12 ins
 in the ground marked 44 on
 W face

5500 O.R. & N. Railway C.T.H.

7770 Wmatta river 100 lbs wide runs W.

8000 Set basalt stone 16x10x8 ins

10 ins in the ground for

Cor to Secs 4, 5, 8 and 9

marked with 5 notches on S and

4 notches on East edges and

raised mound of stone over
it,

Land mostly level

Soil white, sandy alkali

Poor agricultural land

East on ran bet Secs 4 and 9

621° East

4000 Set ten 1/4 Sec cor and an

8000 Intersec. N & S line 15 lbs of

Cor to Secs 8, 4, 9 and 10

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

Thence N. 89° 54' W on true line
 to Wagon road N
 1500 Urmatilla river N.W. 75 fts wide
 3250 Lane S.W.
 4000 Set basalt stone 12 x 10 x 8 ins
 8 ins in the ground for 1/4 sec
 cor. from which
 A balin 4 ins diam. bears N 10 W.
 64 fts dist marked 1/4 S.B.T.
 no other tree in limits dug
 pits 18 x 18 x 12 ins E. of
 stone 5 1/2 ft dist and raised
 mound of earth 1 1/2 ft high
 3 1/2 ft base, over it
 2000 Log to sec 45. 9 and 10
 Land river bottom
 Soil 1st rate
 Timber Balm, pine, and Willow
 Heavy under brush Lane 80 chs

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

North on number 222 4 and 5
Va 21° East

7555 Set temporary ~~corners~~ corners
at 20, 40 and 60 chains and at
Intersect N. bdy Township 50 (Kee)
E of cor to sec 4: 5, 32733
Thence S 21° E on true line

Va 21° East

1000 Gulch S. St.

1555 Deposited charred stake 12 ins
in the ground for 1/16 sec cor
dug pits 18x18x12 ins N & S
of stake 5 1/2 ft dist raised mound
of earth 1 1/2 ft high 3 1/2 ft base
over it and in N pit drove
stake 2 ft long 2 ins square
12 ins in the ground marked
1/16 S on N face

2000 Canyon S. St. — 200

3150 Top hill and begin descent + 200

3555 Set basalt stone 9x8x7 ins

Subdivisions of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

(8093-10 M.)

- ins in the ground for $\frac{1}{4}$ sec
 cor marked $\frac{1}{4}$ on N. face
 dug pits $18 \times 18 \times 12$ ins N & S
 of stake $5\frac{1}{2}$ ft. dist, raised
 mound of earth $1\frac{1}{2}$ ft high,
 $8\frac{1}{2}$ ft. base over it
- 4955 Bottom hill and enter river
 bottom
- 5555 Deposited charred stake 12 ins
 in the ground for $\frac{1}{6}$ sec. cor,
 dug pits $18 \times 18 \times 12$ ins N and
 S of stake $5\frac{1}{2}$ ft dist raised
 mound of earth $1\frac{1}{2}$ ft high
 $8\frac{1}{2}$ ft base over it and in
 N. pit drove stake 2 ft long,
 2 ins square, 12 ins in the
 ground, marked $\frac{1}{6}$ S on N
 face.
- 6450 Stream 20 lbs wide runs N
- 6600 Enter Timber
- 7555 Cor to secs 4, 5 8 and 9

Subdivisions of T. 2 North R. 38 East

Willamette Meridian, Oregon.

Land bottom and upland
Soil 2nd rate in bottom
1st rate on upland
Timber Balw along river

North bet sec 31 and 32
Twp 19 1/2 East

- 1625 Spring branch 3 lks N.
- 1645 Wagon road. N.
- 2000 Drove charred stake 12 ins in the ground for 1/16 sec cor dug pits 18x18x12 ins N & S of stake 5 1/2 ft. diam. raised mound of earth 1 1/2 ft high 3 1/2 ft. base over it and in N pit drove stake 2 ft long 2 ins square 12 ins in the ground marked 1/16 S on N face.

11000 Deposited charred stake 12 ins in the ground for 1/4 sec. cor. dug pits 18x18x12 ins N & S of stake

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

5 1/2 ft dia raised mound of earth 1 1/2 ft high 3 1/2 ft base over it and in N pit drove stake 2 ft long 2 ins square 12 ins in the ground marked 1/4 Low N. face.

6000 Deposited charred stake 12 ins in the ground for 1/6 sec cor dug pits 18 x 18 x 12 ins N & S of stake. 5 1/2 ft dia raised mound earth 1 1/2 ft high 3 1/2 ft base over it and in N. pit drove stake 2 ft long. 2 ins square 12 ins in the ground marked 1/6 Low N. face.

8000 Deposited charred stake 12 ins in the ground for 1/6 to 2 sec 29, 30, 31 and 32, dug pits 18 x 18 x 12 ins in each sec 5 1/2 ft dia raised mound of earth 2 ft high 4 1/2 ft base

Subdivisions of T. 2 North R. 38 East
Willamette Meridian, Oregon.

✓ over it and in S.E. corner
drive stake 2 ft long 2 ins
square 12 ins in the ground
marked

T 2 N S 29 on N.E.

R 38 E S 32 on S.E.

S 31 on S.W. and S 30 on N.W.

faces with 1 notch on S and
5 notches on E edges

Land level

Soil 1st rate

All good agricultural land

East on ran bet sec 28 and 32

on 21° East

Set temporary ~~corn~~ ^{corn}

at 20, 40 and 60 chains and at

good Intersect N & S line 12 blocks of

cor to sec. 28, 29 32 and 33

Thence N 89° 35' W on true line

Subdivisions of T. North R. 38 East
Willamette Meridian, Oregon.

(8093-10 M.)

		Was same
590	Wagon road N.W.	
2000	Deposited charred stake 12 ins in the ground for $\frac{1}{16}$ sec. cor. dug pits 18x18x12 ins E & W of stake 5 $\frac{1}{2}$ ft. dist. raised mound of earth 1 $\frac{1}{2}$ ft high 3 $\frac{1}{2}$ ft base over it and in E pit drove stake 2 ft long 2 ins square 12 ins in the ground marked $\frac{1}{16}$ S on N face	
2500	Ditch fence & enter field	
4000	Deposited charred stake 12 ins in the ground for $\frac{1}{4}$ sec. cor. dug pits 18x18x12 ins E & W of stake 5 $\frac{1}{2}$ ft dist. raised mound of earth 1 $\frac{1}{2}$ ft high 3 $\frac{1}{2}$ ft base over it and in E pit drove stake 2 ft long 2 ins square. 12 ins in the ground marked $\frac{1}{4}$ S on N face	

Subdivisions of T. 2 North R. 93 East

Willamette Meridian, Oregon.

House bears N.E. about 8 chains

4025
6000

Rail fence and leave field N & S
Deposited charred stake 12 ins in the
ground for $\frac{1}{16}$ sec. cor. dug pits 18x18x12
ins E & W of stake $5\frac{1}{2}$ ft. dist.
raised mound of earth $1\frac{1}{2}$ ft high
 $3\frac{1}{2}$ ft. base over it and in E pit
drove stake 2 ft. long 2 ins square
12 ins in the ground marked $\frac{1}{16}$ S
on N. face.

2000

for to sec 29, 30, 31 and 32
Land rolling
Soil 1st rate
All good agricultural land

West on true line bet sec 30 & 31

R. 93 East

2000

Deposited charred stake 12 ins in
the ground for $\frac{1}{16}$ sec cor
dug pits 18x18x12 ins E & W of stake
 $5\frac{1}{2}$ ft dist, raised mound of

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

* 6000. Deposited charred stake 12 ins in the ground for 1/16 Sec cor
Dug pits 18 x 18 x 12 ins E & W of Stake 5 1/2 ft dia raised a
mound of earth 1 1/2 ft high 3 1/2 ft base char. In E pit drove
stake 2 ft long 2 ins square 12 ins
in the ground marked 1/16 S.
in N. face
9565
4000
7655

earth 1 1/2 ft high 3 1/2 ft base
over it and in E pit drove
stake 2 ft long 2 ins square
12 ins in the ground marked
1/16 S on N. face.
Wagon road S.
Deposited charred stake 12 ins in
the ground for 1/16 sec. cor.
dug pits 18 x 18 x 12 ins E & W
of stake 5 1/2 ft dia raised mound
of earth 1 1/2 ft high 3 1/2 ft base
over it and in E pit drove
stake 2 ft long 2 ins square
12 ins in the ground marked
1/4 S on N. face
* Intersect N. bdy Township 6 & 8th
N of cor to secs 25 and 36 and
deposited charred stake 12 ins in the
ground for closing cor. to secs
30 and 31. dug pits 18 x 18 x 12 ins
N. E. and S of stake 5 1/2 ft dia

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

raised mound of earth 2 ft
high 4 1/2 ft base over it and
in E pit drove stake 2 ft long
2 ins square 12 ins in the ground
marked

66 T2 N R 33 E on E
S 30 on N and S 31 on S faces
with one notch on S and 5 notches
on N edge + edges

Land pretty rolling
Soil 2nd rate light and sandy
fair agricultural land.

North bet sec 29 and 30
ba 21° East

2000 Deposited charred stake 12 ins in the
ground for 1/4 sec cor. dug pits
18 x 18 x 12 ins N & S of stake 5 1/2 ft
dist. raised mound of earth
1 1/2 ft high 3 1/2 ft base over it and
in N pit drove stake 12 ins

112

Subdivisions of T. 2 North R. 39 East

Willamette Meridian, Oregon.

(8093-10 M.)

in the ground marked $\frac{1}{10}$ \otimes
on its face

4000 Deposited charred stake 12 ins in the
ground for $\frac{1}{4}$ sec. cor. dug
pits 18 x 18 x 12 ins N & S of
stake 5 $\frac{1}{2}$ ft dia. raised
mound of earth 1 $\frac{1}{2}$ ft high
3 $\frac{1}{2}$ ft base over it and in
N. pit. drove stake 2 ft long
2 ins square 12 ins in the
ground marked $\frac{1}{4}$ \otimes on its
face.

6000 Deposited charred stake 12 ins
in the ground for $\frac{1}{16}$ sec
cor. dug pits 18 x 18 x 12 ins
N & S of stake 5 $\frac{1}{2}$ ft dia.
raised mound of earth
1 $\frac{1}{2}$ ft high 3 $\frac{1}{2}$ ft base
over it and in N. pit
drove stake 2 ft long 2 ins
square 12 ins in the ground

113

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

marked $\frac{1}{6}$ on N. face
Drove charred stake 12 ins in
the ground for cor to see
19, 20, 29 and 30, dug pits
18 x 18 x 12 ins in each see
 $5\frac{1}{2}$ ft. diam raised mound of
earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base
over it and in S. E. pit
drove stake 2 ft. long 2 ins
square 12 ins in the ground
marked

T 2 N S 28 on N. E.
R 33 E S 29 on S. E.
S 30 on S. W. and S 19 on N. W.
faces. with 2 notches on S
and 5 notches on E. edges

Land level

Soil 1st. rate

Good agricultural land
But little grass,

Subdivision of T. 20 North R. 33 East
 Willamette Meridian, Oregon.

(8093-10 M.)

Bear on raw bar sees
 20 and 29

On 20th East
 Set temporary ~~points~~
 cor at 20, 40 & 60 chains
 and at

7960

Intersect N & S line 4 lks
 N of cor to sees 20, 21, 28 and 29
 Thence N 89° 58' W on true
 line

1990

On same
 Deposited charred stake 12 ins
 in the ground for $\frac{1}{16}$ sec
 cor. dug pits 18 x 18 x 12 ins
 E & W of stake 5 $\frac{1}{2}$ ft dist
 raised mounds of earth 1 $\frac{1}{2}$ ft
 high 3 $\frac{1}{2}$ ft base over it
 and in E pit drove stake
 2 ft. long 2 ins square.
 12 ins in the ground marked
 $\frac{1}{16}$ S on N. face

Subdivisions of T. J. North R. 99 East

Willamette Meridian, Oregon.

2475

Indie willows creek 5ths It

3650

Hagoo road N.

3980

Deposited charred stake 12 ins in the ground for 1/4 sec. cor. dug pits 18 x 18 x 12 ins E & It of stake 5 1/2 ft dist. raised mound of earth 1 1/2 ft high 3 1/2 ft base over it and in E pit drove stake 2 ft long 2 ins square 12 ins in the ground marked 1/4 E on N face.

5970

Deposited charred stake 12 ins in the ground for 1/16 sec. cor. dug pits 18 x 18 x 12 ins E & It of stake 5 1/2 ft dist raised mound of earth 1 1/2 ft high 3 1/2 ft base over it and in E pit drove stake 2 ft long 2 ins square 12 ins in the ground marked 1/16 E on N face.

Subdivision of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

(8093-10 M.)

7960

Con to secs 19, 20, 29 and 30
 Land level
 Soil good
 All fair agricultural land
 Post on true line bet secs
 19 and 30

Pa 20° East

2000

Deposited charred stake 12 ins
 in the ground for $\frac{1}{16}$ sec
 cor. dug pits 18 x 18 x 12 ins
 E and W of stake $5\frac{1}{2}$ ft
 dist raised mound of
 earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$
 ft base over it and
 in E pit drove stake
 2 ft long 2 ins square
 12 ins in the ground
 marked $\frac{1}{16}$ S on N. face

4000

Deposited charred stake 12 ins
 in the ground for $\frac{1}{4}$ sec.

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(12 01-000)

cor. dug pits 18 x 18 x 12 ins
 E and N. of stake 5 1/2 ft dist
 raised mound of earth
 1 1/2 ft high 3 1/2 ft base over
 it and in East pit drove
 stake 2 ft long 2 ins
 square 12 ins in the
 ground marked 1/4 S on
 N. face.

6000 Deposited charred stake 12
 ins in the ground for
 1/16 sec. cor. dug pits
 18 x 18 x 12 ins E and N. of
 stake 5 1/2 ft dist raised
 mound of earth 1 1/2 ft
 high 3 1/2 ft. base over it
 and in E pit drove stake
 2 ft long 2 ins square
 12 ins in the ground
 marked 1/16 S on N face

7625

Intersect N. body Township and

Subdivision of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

Deposited charred stake
12 ins in the ground
for closing cor. to sees
19 and 20. 184 lks N of
cor to sees 24 and 25

T 2 N R 33 East, dug
pits 18 x 18 x 12 ins N.E.
and S of stake 5 1/2 ft dist
raised mound of earth
2 ft high 4 1/2 ft base
over it and in E pit
drove stake 2 ft long.

2 ins square 12 ins in
the ground marked

C.C. T 2 N R 33 E on C

S 19 on N and S 30 on S
faces with 2 notches

on S and 4 notches on

N edges

Level land, Soil 1st rate
Some bunch grass

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

North bet sees 19 and 20
On 20th East

2000 Deposited charred stake 12
ins in the ground for
1/16 sec. cor. dug pits
18 x 18 x 12 ins N and S of
stake 5 1/2 ft. dist. raised
mound of earth 1 1/2 ft high
3 1/2 ft base over it, and in
N. pit. drove stake 2 ft long.
2 ins square. 12 ins in the
ground marked 1/16 S on
N. face.

2175 Wagon road E and W

4000 Grove charred stake 12 ins
in the ground for 1/16[?] sec
cor. dug pits 18 x 18 x 12 ins
N and S of stake 5 1/2 ft. dist
raised mound of earth 1 1/2 ft
high 3 1/2 ft. base over it
and in N pit. drove stake

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

- 2 ft. long 2 ins square
12 ins in the ground
marked $\frac{1}{4}$ S on It. face
- 4500 Fence and enter field E. & It.
- 6000 Deposited charred stake
12 ins in the ground for
 $\frac{1}{16}$ sec. cor. dug pits.
18 x 18 x 12 ins. It and S of
stake $5\frac{1}{2}$ ft diam. raised
mound of earth $1\frac{1}{2}$ ft
high $3\frac{1}{2}$ ft base over it
and in N. pit drove
stake 2 ft long. 2 ins
square 12 ins in the
ground marked $\frac{1}{16}$ S.
on It. face.
- 8000 Deposited charred stake
12 ins in the ground
for cor. to sees 17, 18, 19 &
20 dug pits 18 x 18 x 12 ins
in each sees $5\frac{1}{2}$ ft diam

Subdivision of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

raised mound of earth
 2 ft high $4\frac{1}{2}$ ft base over
 it, and in S.E. pit
 drove stake 2 ft long 2 ins
 square 12 ins in the ground
 marked

S 2 N S 17 on N.E.

R 33 E S 20 on S.E.

S 19 on S. W. and S 18 on N. W.

faces with 3 notches on
 S and 5 notches on E edges

Land gently rolling
 Soil 1st rate

Well adapted to agriculture

East on ran bet secs 17 and 20

Qa 19° East

Set temporary ~~mark~~ cor.

at 20,40,800 chains and at

7940

Intersect N and S line 12 kts

S of cor to secs 16, 17, 20 and 21

Subdivision of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

Thence S $89^{\circ} 55'$ W on true
line Pa. 21° East

200 Wagon road N.

1100 Wagon road N.

1995 19.95 Deposited charred stake 12 ins
in the ground for $\frac{1}{16}$ sec.
cor. dug pits $18 \times 18 \times 12$ ins
E and W of stake $5\frac{1}{2}$ ft diam
raised mound of earth
 $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base
over it and in East pit
drove stake 2 ft long.

2 ins square 12 ins in
the ground, marked
 $\frac{1}{16}$ S on N face

3990 39.90 Deposited charred stake 12 ins
in the ground for $\frac{1}{4}$ sec. cor.
dug pits $18 \times 17 \times 12$ ins E & W
of stake $5\frac{1}{2}$ ft diam raised
mounds of earth $1\frac{1}{2}$ ft high
 $3\frac{1}{2}$ ft base over it and in

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

Cast pit drove stake 2 ft
long 2 ins square 12 ins
in the ground marked
 $\frac{1}{4}$ S on N. face.

4650 Fence Rd enter field

4800 Dry ditch N.W.

5985

Deposited charred stake 12 ins in
the ground for $\frac{1}{6}$ sec. cor.

dug pits 18 x 18 x 12 ins E & W
of stake $5\frac{1}{2}$ ft dist raised
mound of earth $1\frac{1}{2}$ ft high
 $3\frac{1}{2}$ ft base over it and in

E pit drove stake 2 ft long
2 ins square 12 ins in the
ground marked $\frac{1}{6}$ S on
N. face.

7980 Cor. to sees 17, 18, 19 and 20

Land level

Soil 1st rate

Well adapted to agriculture

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

- West on true line bet secs 18 & 19
Ta 19th East
- 2000 Deposited charred stake 12 ins
in the ground for $\frac{1}{6}$ sec.
1 cor. dug pits 18x18x12 ins
E & W of stake $5\frac{1}{2}$ ft dist
raised mound of earth
 $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base
over it and in E pit
drove stake 2 ft long
2 ins square 12 ins
in the ground marked
 $\frac{1}{6}$ D on N. face.
- 3000 Fence and leave field N & S
- 3550 Wagon road N.
- 4000 Deposited charred stake 12
ins in the ground for
 $\frac{1}{4}$ sec. cor. dug pits
18x18x12 ins E & W of stake
 $5\frac{1}{2}$ ft dist raised mound
of earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

base over it and in E pit
drove stake 2 ft long 2 ins
square 12 ins in the
ground marked 1/4 S on
N face

5585 Wagon road N

6000 Deposited charred stake 12 ins
in the ground for 1/6 sec.
cor dug pits 18 x 18 x 12 ins
E end N of stake 5 1/2 ft dist
raised mound of earth
1 1/2 ft high 3 1/2 ft base over
it and in E pit drove
stake 2 ft long 2 ins square
12 ins in the ground marked
1/6 S on N face

7668 Intersect N bdy Township
275 lbs N of cor to sec.

18 and 24 T 2 N R 32 E and
deposited charred stake 12
ins in the ground

126

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

for closing cor. to sees
18 and 19 dug pits 18x18x12
ins N. E. and S. of stake
5 1/2 ft. dist. raised mound
of earth 2 ft high 4 1/2 ft.
base over it and in

E pit drove stake 2 ft
long 2 ins square 12 ins
in the ground marked

C. C. T. 2 N R 33. On C
S 18 on N and S 19 on S face
with 3 notches on S and N

~~edges~~ edges
Land level
Soil 1st rate

North bet sees 17 and 18

On 19th East

1675 Fence and leave field or meadow

2000 Set post 8 ft long 3 ins square
24 ins in the ground for.

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

1/6 sec. cor. marked 1/6 D
on N. face. and raised mound
of stone 1 1/2 ft high 3 1/2 ft base
around it

2500 Top hill E and N.

4000 Deposited charred stake 12 ins
in the ground for 1/4 sec.
cor. dug pits 18 x 18 x 12 ins
N and S of stake 5 1/2 ft. dist
raised mound of earth 1 1/2 ft
high 3 1/2 ft. base over it.
and in N. pit drove stake 2 ft.
long 2 ins square 12 ins in the
ground marked 1/4 D on N. face

4450 Gulch S. N.

-20

5300 Wagon road

6000 Deposited charred stake 12 ins
in the ground for 1/6 sec. cor.
dug pits 18 x 18 x 12 ins N and S
of stake 5 1/2 ft. dist. raised
mound of earth 1 1/2 ft high.

118

128

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

3 1/2 ft base over it and in
N pit drove stake 2 ft long
2 ins square 12 ins in the
ground marked 1/6 S on N.
face.

6680

Old Emigrant wagon road N.

8000

Deposited charred stake 12 ins
in the ground for cor to
secs 7, 8, 17 and 18 dug pits
18 x 18 x 12 ins in each sec

4 1/2 ft

5 1/2 ft dist raised mound
base over it and in S.E. pit drove stake 2 ft long
of earth 2 ft high, 2 ins
square 12 ins in the ground
marked

S 2 N S & on N. E.
R 33 E S 17 on S. E.
S 18 on S. N. and S 7 on N. N.

faces with 4 notches on S and
5 notches on E. Edges

Land rolling Soil 1st rate
Good agricultural land

Subdivisions of T. 2 North R. 39 East
 Willamette Meridian, Oregon.

East on random lot sees § 2nd 17
 Pa 20 1/4 East

7960 Set temporary ~~4~~ ~~5~~ ~~6~~ ~~7~~ ~~8~~ ~~9~~ ~~10~~ ~~11~~ ~~12~~ ~~13~~ ~~14~~ ~~15~~ ~~16~~ ~~17~~ ~~18~~ ~~19~~ ~~20~~ ~~21~~ ~~22~~ ~~23~~ ~~24~~ ~~25~~ ~~26~~ ~~27~~ ~~28~~ ~~29~~ ~~30~~ ~~31~~ ~~32~~ ~~33~~ ~~34~~ ~~35~~ ~~36~~ ~~37~~ ~~38~~ ~~39~~ ~~40~~ ~~41~~ ~~42~~ ~~43~~ ~~44~~ ~~45~~ ~~46~~ ~~47~~ ~~48~~ ~~49~~ ~~50~~ ~~51~~ ~~52~~ ~~53~~ ~~54~~ ~~55~~ ~~56~~ ~~57~~ ~~58~~ ~~59~~ ~~60~~ ~~61~~ ~~62~~ ~~63~~ ~~64~~ ~~65~~ ~~66~~ ~~67~~ ~~68~~ ~~69~~ ~~70~~ ~~71~~ ~~72~~ ~~73~~ ~~74~~ ~~75~~ ~~76~~ ~~77~~ ~~78~~ ~~79~~ ~~80~~ ~~81~~ ~~82~~ ~~83~~ ~~84~~ ~~85~~ ~~86~~ ~~87~~ ~~88~~ ~~89~~ ~~90~~ ~~91~~ ~~92~~ ~~93~~ ~~94~~ ~~95~~ ~~96~~ ~~97~~ ~~98~~ ~~99~~ ~~100~~ ~~101~~ ~~102~~ ~~103~~ ~~104~~ ~~105~~ ~~106~~ ~~107~~ ~~108~~ ~~109~~ ~~110~~ ~~111~~ ~~112~~ ~~113~~ ~~114~~ ~~115~~ ~~116~~ ~~117~~ ~~118~~ ~~119~~ ~~120~~ ~~121~~ ~~122~~ ~~123~~ ~~124~~ ~~125~~ ~~126~~ ~~127~~ ~~128~~ ~~129~~ ~~130~~ ~~131~~ ~~132~~ ~~133~~ ~~134~~ ~~135~~ ~~136~~ ~~137~~ ~~138~~ ~~139~~ ~~140~~ ~~141~~ ~~142~~ ~~143~~ ~~144~~ ~~145~~ ~~146~~ ~~147~~ ~~148~~ ~~149~~ ~~150~~ ~~151~~ ~~152~~ ~~153~~ ~~154~~ ~~155~~ ~~156~~ ~~157~~ ~~158~~ ~~159~~ ~~160~~ ~~161~~ ~~162~~ ~~163~~ ~~164~~ ~~165~~ ~~166~~ ~~167~~ ~~168~~ ~~169~~ ~~170~~ ~~171~~ ~~172~~ ~~173~~ ~~174~~ ~~175~~ ~~176~~ ~~177~~ ~~178~~ ~~179~~ ~~180~~ ~~181~~ ~~182~~ ~~183~~ ~~184~~ ~~185~~ ~~186~~ ~~187~~ ~~188~~ ~~189~~ ~~190~~ ~~191~~ ~~192~~ ~~193~~ ~~194~~ ~~195~~ ~~196~~ ~~197~~ ~~198~~ ~~199~~ ~~200~~ ~~201~~ ~~202~~ ~~203~~ ~~204~~ ~~205~~ ~~206~~ ~~207~~ ~~208~~ ~~209~~ ~~210~~ ~~211~~ ~~212~~ ~~213~~ ~~214~~ ~~215~~ ~~216~~ ~~217~~ ~~218~~ ~~219~~ ~~220~~ ~~221~~ ~~222~~ ~~223~~ ~~224~~ ~~225~~ ~~226~~ ~~227~~ ~~228~~ ~~229~~ ~~230~~ ~~231~~ ~~232~~ ~~233~~ ~~234~~ ~~235~~ ~~236~~ ~~237~~ ~~238~~ ~~239~~ ~~240~~ ~~241~~ ~~242~~ ~~243~~ ~~244~~ ~~245~~ ~~246~~ ~~247~~ ~~248~~ ~~249~~ ~~250~~ ~~251~~ ~~252~~ ~~253~~ ~~254~~ ~~255~~ ~~256~~ ~~257~~ ~~258~~ ~~259~~ ~~260~~ ~~261~~ ~~262~~ ~~263~~ ~~264~~ ~~265~~ ~~266~~ ~~267~~ ~~268~~ ~~269~~ ~~270~~ ~~271~~ ~~272~~ ~~273~~ ~~274~~ ~~275~~ ~~276~~ ~~277~~ ~~278~~ ~~279~~ ~~280~~ ~~281~~ ~~282~~ ~~283~~ ~~284~~ ~~285~~ ~~286~~ ~~287~~ ~~288~~ ~~289~~ ~~290~~ ~~291~~ ~~292~~ ~~293~~ ~~294~~ ~~295~~ ~~296~~ ~~297~~ ~~298~~ ~~299~~ ~~300~~ ~~301~~ ~~302~~ ~~303~~ ~~304~~ ~~305~~ ~~306~~ ~~307~~ ~~308~~ ~~309~~ ~~310~~ ~~311~~ ~~312~~ ~~313~~ ~~314~~ ~~315~~ ~~316~~ ~~317~~ ~~318~~ ~~319~~ ~~320~~ ~~321~~ ~~322~~ ~~323~~ ~~324~~ ~~325~~ ~~326~~ ~~327~~ ~~328~~ ~~329~~ ~~330~~ ~~331~~ ~~332~~ ~~333~~ ~~334~~ ~~335~~ ~~336~~ ~~337~~ ~~338~~ ~~339~~ ~~340~~ ~~341~~ ~~342~~ ~~343~~ ~~344~~ ~~345~~ ~~346~~ ~~347~~ ~~348~~ ~~349~~ ~~350~~ ~~351~~ ~~352~~ ~~353~~ ~~354~~ ~~355~~ ~~356~~ ~~357~~ ~~358~~ ~~359~~ ~~360~~ ~~361~~ ~~362~~ ~~363~~ ~~364~~ ~~365~~ ~~366~~ ~~367~~ ~~368~~ ~~369~~ ~~370~~ ~~371~~ ~~372~~ ~~373~~ ~~374~~ ~~375~~ ~~376~~ ~~377~~ ~~378~~ ~~379~~ ~~380~~ ~~381~~ ~~382~~ ~~383~~ ~~384~~ ~~385~~ ~~386~~ ~~387~~ ~~388~~ ~~389~~ ~~390~~ ~~391~~ ~~392~~ ~~393~~ ~~394~~ ~~395~~ ~~396~~ ~~397~~ ~~398~~ ~~399~~ ~~400~~ ~~401~~ ~~402~~ ~~403~~ ~~404~~ ~~405~~ ~~406~~ ~~407~~ ~~408~~ ~~409~~ ~~410~~ ~~411~~ ~~412~~ ~~413~~ ~~414~~ ~~415~~ ~~416~~ ~~417~~ ~~418~~ ~~419~~ ~~420~~ ~~421~~ ~~422~~ ~~423~~ ~~424~~ ~~425~~ ~~426~~ ~~427~~ ~~428~~ ~~429~~ ~~430~~ ~~431~~ ~~432~~ ~~433~~ ~~434~~ ~~435~~ ~~436~~ ~~437~~ ~~438~~ ~~439~~ ~~440~~ ~~441~~ ~~442~~ ~~443~~ ~~444~~ ~~445~~ ~~446~~ ~~447~~ ~~448~~ ~~449~~ ~~450~~ ~~451~~ ~~452~~ ~~453~~ ~~454~~ ~~455~~ ~~456~~ ~~457~~ ~~458~~ ~~459~~ ~~460~~ ~~461~~ ~~462~~ ~~463~~ ~~464~~ ~~465~~ ~~466~~ ~~467~~ ~~468~~ ~~469~~ ~~470~~ ~~471~~ ~~472~~ ~~473~~ ~~474~~ ~~475~~ ~~476~~ ~~477~~ ~~478~~ ~~479~~ ~~480~~ ~~481~~ ~~482~~ ~~483~~ ~~484~~ ~~485~~ ~~486~~ ~~487~~ ~~488~~ ~~489~~ ~~490~~ ~~491~~ ~~492~~ ~~493~~ ~~494~~ ~~495~~ ~~496~~ ~~497~~ ~~498~~ ~~499~~ ~~500~~ ~~501~~ ~~502~~ ~~503~~ ~~504~~ ~~505~~ ~~506~~ ~~507~~ ~~508~~ ~~509~~ ~~510~~ ~~511~~ ~~512~~ ~~513~~ ~~514~~ ~~515~~ ~~516~~ ~~517~~ ~~518~~ ~~519~~ ~~520~~ ~~521~~ ~~522~~ ~~523~~ ~~524~~ ~~525~~ ~~526~~ ~~527~~ ~~528~~ ~~529~~ ~~530~~ ~~531~~ ~~532~~ ~~533~~ ~~534~~ ~~535~~ ~~536~~ ~~537~~ ~~538~~ ~~539~~ ~~540~~ ~~541~~ ~~542~~ ~~543~~ ~~544~~ ~~545~~ ~~546~~ ~~547~~ ~~548~~ ~~549~~ ~~550~~ ~~551~~ ~~552~~ ~~553~~ ~~554~~ ~~555~~ ~~556~~ ~~557~~ ~~558~~ ~~559~~ ~~560~~ ~~561~~ ~~562~~ ~~563~~ ~~564~~ ~~565~~ ~~566~~ ~~567~~ ~~568~~ ~~569~~ ~~570~~ ~~571~~ ~~572~~ ~~573~~ ~~574~~ ~~575~~ ~~576~~ ~~577~~ ~~578~~ ~~579~~ ~~580~~ ~~581~~ ~~582~~ ~~583~~ ~~584~~ ~~585~~ ~~586~~ ~~587~~ ~~588~~ ~~589~~ ~~590~~ ~~591~~ ~~592~~ ~~593~~ ~~594~~ ~~595~~ ~~596~~ ~~597~~ ~~598~~ ~~599~~ ~~600~~ ~~601~~ ~~602~~ ~~603~~ ~~604~~ ~~605~~ ~~606~~ ~~607~~ ~~608~~ ~~609~~ ~~610~~ ~~611~~ ~~612~~ ~~613~~ ~~614~~ ~~615~~ ~~616~~ ~~617~~ ~~618~~ ~~619~~ ~~620~~ ~~621~~ ~~622~~ ~~623~~ ~~624~~ ~~625~~ ~~626~~ ~~627~~ ~~628~~ ~~629~~ ~~630~~ ~~631~~ ~~632~~ ~~633~~ ~~634~~ ~~635~~ ~~636~~ ~~637~~ ~~638~~ ~~639~~ ~~640~~ ~~641~~ ~~642~~ ~~643~~ ~~644~~ ~~645~~ ~~646~~ ~~647~~ ~~648~~ ~~649~~ ~~650~~ ~~651~~ ~~652~~ ~~653~~ ~~654~~ ~~655~~ ~~656~~ ~~657~~ ~~658~~ ~~659~~ ~~660~~ ~~661~~ ~~662~~ ~~663~~ ~~664~~ ~~665~~ ~~666~~ ~~667~~ ~~668~~ ~~669~~ ~~670~~ ~~671~~ ~~672~~ ~~673~~ ~~674~~ ~~675~~ ~~676~~ ~~677~~ ~~678~~ ~~679~~ ~~680~~ ~~681~~ ~~682~~ ~~683~~ ~~684~~ ~~685~~ ~~686~~ ~~687~~ ~~688~~ ~~689~~ ~~690~~ ~~691~~ ~~692~~ ~~693~~ ~~694~~ ~~695~~ ~~696~~ ~~697~~ ~~698~~ ~~699~~ ~~700~~ ~~701~~ ~~702~~ ~~703~~ ~~704~~ ~~705~~ ~~706~~ ~~707~~ ~~708~~ ~~709~~ ~~710~~ ~~711~~ ~~712~~ ~~713~~ ~~714~~ ~~715~~ ~~716~~ ~~717~~ ~~718~~ ~~719~~ ~~720~~ ~~721~~ ~~722~~ ~~723~~ ~~724~~ ~~725~~ ~~726~~ ~~727~~ ~~728~~ ~~729~~ ~~730~~ ~~731~~ ~~732~~ ~~733~~ ~~734~~ ~~735~~ ~~736~~ ~~737~~ ~~738~~ ~~739~~ ~~740~~ ~~741~~ ~~742~~ ~~743~~ ~~744~~ ~~745~~ ~~746~~ ~~747~~ ~~748~~ ~~749~~ ~~750~~ ~~751~~ ~~752~~ ~~753~~ ~~754~~ ~~755~~ ~~756~~ ~~757~~ ~~758~~ ~~759~~ ~~760~~ ~~761~~ ~~762~~ ~~763~~ ~~764~~ ~~765~~ ~~766~~ ~~767~~ ~~768~~ ~~769~~ ~~770~~ ~~771~~ ~~772~~ ~~773~~ ~~774~~ ~~775~~ ~~776~~ ~~777~~ ~~778~~ ~~779~~ ~~780~~ ~~781~~ ~~782~~ ~~783~~ ~~784~~ ~~785~~ ~~786~~ ~~787~~ ~~788~~ ~~789~~ ~~790~~ ~~791~~ ~~792~~ ~~793~~ ~~794~~ ~~795~~ ~~796~~ ~~797~~ ~~798~~ ~~799~~ ~~800~~ ~~801~~ ~~802~~ ~~803~~ ~~804~~ ~~805~~ ~~806~~ ~~807~~ ~~808~~ ~~809~~ ~~810~~ ~~811~~ ~~812~~ ~~813~~ ~~814~~ ~~815~~ ~~816~~ ~~817~~ ~~818~~ ~~819~~ ~~820~~ ~~821~~ ~~822~~ ~~823~~ ~~824~~ ~~825~~ ~~826~~ ~~827~~ ~~828~~ ~~829~~ ~~830~~ ~~831~~ ~~832~~ ~~833~~ ~~834~~ ~~835~~ ~~836~~ ~~837~~ ~~838~~ ~~839~~ ~~840~~ ~~841~~ ~~842~~ ~~843~~ ~~844~~ ~~845~~ ~~846~~ ~~847~~ ~~848~~ ~~849~~ ~~850~~ ~~851~~ ~~852~~ ~~853~~ ~~854~~ ~~855~~ ~~856~~ ~~857~~ ~~858~~ ~~859~~ ~~860~~ ~~861~~ ~~862~~ ~~863~~ ~~864~~ ~~865~~ ~~866~~ ~~867~~ ~~868~~ ~~869~~ ~~870~~ ~~871~~ ~~872~~ ~~873~~ ~~874~~ ~~875~~ ~~876~~ ~~877~~ ~~878~~ ~~879~~ ~~880~~ ~~881~~ ~~882~~ ~~883~~ ~~884~~ ~~885~~ ~~886~~ ~~887~~ ~~888~~ ~~889~~ ~~890~~ ~~891~~ ~~892~~ ~~893~~ ~~894~~ ~~895~~ ~~896~~ ~~897~~ ~~898~~ ~~899~~ ~~900~~ ~~901~~ ~~902~~ ~~903~~ ~~904~~ ~~905~~ ~~906~~ ~~907~~ ~~908~~ ~~909~~ ~~910~~ ~~911~~ ~~912~~ ~~913~~ ~~914~~ ~~915~~ ~~916~~ ~~917~~ ~~918~~ ~~919~~ ~~920~~ ~~921~~ ~~922~~ ~~923~~ ~~924~~ ~~925~~ ~~926~~ ~~927~~ ~~928~~ ~~929~~ ~~930~~ ~~931~~ ~~932~~ ~~933~~ ~~934~~ ~~935~~ ~~936~~ ~~937~~ ~~938~~ ~~939~~ ~~940~~ ~~941~~ ~~942~~ ~~943~~ ~~944~~ ~~945~~ ~~946~~ ~~947~~ ~~948~~ ~~949~~ ~~950~~ ~~951~~ ~~952~~ ~~953~~ ~~954~~ ~~955~~ ~~956~~ ~~957~~ ~~958~~ ~~959~~ ~~960~~ ~~961~~ ~~962~~ ~~963~~ ~~964~~ ~~965~~ ~~966~~ ~~967~~ ~~968~~ ~~969~~ ~~970~~ ~~971~~ ~~972~~ ~~973~~ ~~974~~ ~~975~~ ~~976~~ ~~977~~ ~~978~~ ~~979~~ ~~980~~ ~~981~~ ~~982~~ ~~983~~ ~~984~~ ~~985~~ ~~986~~ ~~987~~ ~~988~~ ~~989~~ ~~990~~ ~~991~~ ~~992~~ ~~993~~ ~~994~~ ~~995~~ ~~996~~ ~~997~~ ~~998~~ ~~999~~ ~~1000~~ ~~1001~~ ~~1002~~ ~~1003~~ ~~1004~~ ~~1005~~ ~~1006~~ ~~1007~~ ~~1008~~ ~~1009~~ ~~1010~~ ~~1011~~ ~~1012~~ ~~1013~~ ~~1014~~ ~~1015~~ ~~1016~~ ~~1017~~ ~~1018~~ ~~1019~~ ~~1020~~ ~~1021~~ ~~1022~~ ~~1023~~ ~~1024~~ ~~1025~~ ~~1026~~ ~~1027~~ ~~1028~~ ~~1029~~ ~~1030~~ ~~1031~~ ~~1032~~ ~~1033~~ ~~1034~~ ~~1035~~ ~~1036~~ ~~1037~~ ~~1038~~ ~~1039~~ ~~1040~~ ~~1041~~ ~~1042~~ ~~1043~~ ~~1044~~ ~~1045~~ ~~1046~~ ~~1047~~ ~~1048~~ ~~1049~~ ~~1050~~ ~~1051~~ ~~1052~~ ~~1053~~ ~~1054~~ ~~1055~~ ~~1056~~ ~~1057~~ ~~1058~~ ~~1059~~ ~~1060~~ ~~1061~~ ~~1062~~ ~~1063~~ ~~1064~~ ~~1065~~ ~~1066~~ ~~1067~~ ~~1068~~ ~~1069~~ ~~1070~~ ~~1071~~ ~~1072~~ ~~1073~~ ~~1074~~ ~~1075~~ ~~1076~~ ~~1077~~ ~~1078~~ ~~1079~~ ~~1080~~ ~~1081~~ ~~1082~~ ~~1083~~ ~~1084~~ ~~1085~~ ~~1086~~ ~~1087~~ ~~1088~~ ~~1089~~ ~~1090~~ ~~1091~~ ~~1092~~ ~~1093~~ ~~1094~~ ~~1095~~ ~~1096~~ ~~1097~~ ~~1098~~ ~~1099~~ ~~1100~~ ~~1101~~ ~~1102~~ ~~1103~~ ~~1104~~ ~~1105~~ ~~1106~~ ~~1107~~ ~~1108~~ ~~1109~~ ~~1110~~ ~~1111~~ ~~1112~~ ~~1113~~ ~~1114~~ ~~1115~~ ~~1116~~ ~~1117~~ ~~1118~~ ~~1119~~ ~~1120~~ ~~1121~~ ~~1122~~ ~~1123~~ ~~1124~~ ~~1125~~ ~~1126~~ ~~1127~~ ~~1128~~ ~~1129~~ ~~1130~~ ~~1131~~ ~~1132~~ ~~1133~~ ~~1134~~ ~~1135~~ ~~1136~~ ~~1137~~ ~~1138~~ ~~1139~~ ~~1140~~ ~~1141~~ ~~1142~~ ~~1143~~ ~~1144~~ ~~1145~~ ~~1146~~ ~~1147~~ ~~1148~~ ~~1149~~ ~~1150~~ ~~1151~~ ~~1152~~ ~~1153~~ ~~1154~~ ~~1155~~ ~~1156~~ ~~1157~~ ~~1158~~ ~~1159~~ ~~1160~~ ~~1161~~ ~~1162~~ ~~1163~~ ~~1164~~ ~~1165~~ ~~1166~~ ~~1167~~ ~~1168~~ ~~1169~~ ~~1170~~ ~~1171~~ ~~1172~~ ~~1173~~ ~~1174~~ ~~1175~~ ~~1176~~ ~~1177~~ ~~1178~~ ~~1179~~ ~~1180~~ ~~1181~~ ~~1182~~ ~~1183~~ ~~1184~~ ~~1185~~ ~~1186~~ ~~1187~~ ~~1188~~ ~~1189~~ ~~1190~~ ~~1191~~ ~~1192~~ ~~1193~~ ~~1194~~ ~~1195~~ ~~1196~~ ~~1197~~ ~~1198~~ ~~1199~~ ~~1200~~ ~~1201~~ ~~1202~~ ~~1203~~ ~~1204~~ ~~1205~~ ~~1206~~ ~~1207~~ ~~1208~~ ~~1209~~ ~~1210~~ ~~1211~~ ~~1212~~ ~~1213~~ ~~1214~~ ~~1215~~ ~~1216~~ ~~1217~~ ~~1218~~ ~~1219~~ ~~1220~~ ~~1221~~ ~~1222~~ ~~1223~~ ~~1224~~ ~~1225~~ ~~1226~~ ~~1227~~ ~~1228~~ ~~1229~~ ~~1230~~ ~~1231~~ ~~1232~~ ~~1233~~ ~~1234~~ ~~1235~~ ~~1236~~ ~~1237~~ ~~1238~~ ~~1239~~ ~~1240~~ ~~1241~~ ~~1242~~ ~~1243~~ ~~1244~~ ~~1245~~ ~~1246~~ ~~1247~~ ~~1248~~ ~~1249~~ ~~1250~~ ~~1251~~ ~~1252~~ ~~1253~~ ~~1254~~ ~~1255~~ ~~1256~~ ~~1257~~ ~~1258~~ ~~1259~~ ~~1260~~ ~~1261~~ ~~1262~~ ~~1263~~ ~~1264~~ ~~1265~~ ~~1266~~ ~~1267~~ ~~1268~~ ~~1269~~ ~~1270~~ ~~1271~~ ~~1272~~ ~~1273~~ ~~1274~~ ~~1275~~ ~~1276~~ ~~1277~~ ~~1278~~ ~~1279~~ ~~1280~~ ~~1281~~ ~~1282~~ ~~1283~~ ~~1284~~ ~~1285~~ ~~1286~~ ~~1287~~ ~~1288~~ ~~1289~~ ~~1290~~ ~~1291~~ ~~1292~~ ~~1293~~ ~~1294~~ ~~1295~~ ~~1296~~ ~~1297~~ ~~1298~~ ~~1299~~ ~~1300~~ ~~1301~~ ~~1302~~ ~~1303~~ ~~1304~~ ~~1305~~ ~~1306~~ ~~1307~~ ~~1308~~ ~~1309~~ ~~1310~~ ~~1311~~ ~~1312~~ ~~1313~~ ~~1314~~ ~~1315~~ ~~1316~~ ~~1317~~ ~~1318~~ ~~1319~~ ~~1320~~ ~~1321~~ ~~1322~~ ~~1323~~ ~~1324~~ ~~1325~~ ~~1326~~ ~~1327~~ ~~1328~~ ~~1329~~ ~~1330~~ ~~133~~

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

- dug pits 1 ft x 1 ft x 12 ins
E and W of stake 5 1/2 ft dia
raised mound of earth 1 1/2 ft
high 3 1/2 ft base over it
and in E pit drove stake
2 ft long 2 ins square
12 ins in the ground marked
1/4 S on N face
4375 Wagon road N and S
5940 Deposited. charr'd stake 12
ins in the ground for
1/6 sec. cor. dug pits
1 ft x 1 ft x 12 ins E and W of
stake 5 1/2 ft dia raised
mound of earth 1 1/2 ft
high 3 1/2 ft base over it
and in E pit drove stake
2 ft long 2 ins square
12 ins in the ground
marked 1/4 S on N face
7400 Wagon road

Subdivisions of T. 2 North R. 33 East

Willamette Meridian, Oregon.

7960 Cor to secs 7, 8, 17 and 18
Land rolling
Soil 1st rate

West on true line bet secs 7 & 18
on 20 1/4 East

1700 Gulch N.

2000 Grove charred stake 12 ins in
the ground for 1/6 sec. cor.
dug pits 18 x 18 x 12 ins E and W.
of stake 5 1/2 ft dist raised mound
of earth 1 1/2 ft high 3 1/2 ft base
over it and in E pit drove stake
2 ft. long 2 ins square 12 ins in
the ground marked 1/6 S on
N face

4000 Grove charred stake 12 ins in the
ground for 1/4 sec. cor. dug pits
18 x 18 x 12 ins E and W. of stake 5 1/2 ft dist
raised mound of earth 1 1/2 ft high
3 1/2 ft base over it and in E pit

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

drove stake 2 ft long 2 ins square 12 ins in the ground marked $\frac{1}{4}$ S on N face
5076 Gulch N. -100

6000 Deposited charred stake 12 ins in the ground for $\frac{1}{6}$ sec. cor dug pits 18 x 18 x 12 ins E and N of stake $5\frac{1}{2}$ ft. dist raised mound of earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base over it and in E. pit drove stake 2 ft long 2 ins square 12 ins in the ground marked $\frac{1}{6}$ S on N face.

6425 Pendleton and La Grande way road N.W.

7025 Old Emigrant way road N.W.

7675 Intersect It bdy Township 395 lbs N of cor to secs 12 and 18 T 2 N R 33 E and deposited charred stake 12 ins in the ground for closing cor. to secs 7 and 14.

Subdivision of T. 2 North R. 33 East
Willamette Meridian, Oregon.

dug pits 18x18x12 ins
N. End S of stake 5 1/2 ft dist
raised mound of earth
2 ft. high 4 1/2 ft base
over it and in O pit drove
stake 2 ft. long 2 ins square 12 ins
in the ground marked
C C T 2 R 33 O on O
T 7 on N and S 18 on S faces
with 4 notches on S and 2 notches
on N edges.
Land rolling
Soil 2nd rate

North bet sees 7 and 8
Va 20 1/4 East

1500 Enter river bottom
2000 Deposited charred stake 12 ins
in the ground for 1/6 sec. cor.
dug pits 18x18x12 ins
N and S of stake 5 1/2 ft dist

Subdivisions of T. 12 North R. 33 East
Willamette Meridian, Oregon.

(8093-10 M.)

	raised mound of earth 1 1/2 ft. high 3 1/2 ft. base over it. Nud in N pit drove stake 2 ft long 2 ins square 12 ins in the ground marked 1/6 S on N face.
2500	Wagon road N. W.
3500	Wagon road E and W.
4000	Deposited charred stake 12 ins in the ground for 1/4 sec. cor. dug pits 18 x 18 x 12 ins N and S of stake 5 1/2 ft dist raised mound of stone and earth 1 1/2 ft high 3 1/2 ft base over it. Nud in the N pit drove stake 2 ft long. 2 ins square, 12 ins in the ground marked 1/4 S on N face.
6000	O. R. & N. R. R. E and W
7000	A balw pins diam. which I.

Subdivision of T. 2 North R. 33 East
Willamette Meridian, Oregon.

mark T 2 N S 5 on N.E.
R 33 E S 8 on S.E.
S 7 on S. W. and S 6 on N.W.
faces with 5 notches on S and E
edges, for cor to sees 5, 6, 7 & 8.

from which

A balw 4 ins. diam. ^{bore} N 30° E 26 lks. dist.
marked T 2 N R 33 E S 5 B.T.

A balw 8 ins. diam. bears S 10° E 10 lks dist
marked T 2 N R 33 E S 8 B.T.

A balw 24 ins. diam. bears S 45° W 90 lks. ii
marked T 2 N R 33 E S 7 B.T.

A balw 18 ins. diam. bears N 5° W 2 lks dist
marked T 2 N R 33 E S 6 B.T.

Land mostly level Soil good
Timber Balw in bottom.

East on ran bet sees 5 and 8

ba 21° East

4000 Set temporary 1/4 sec cor and at

7980 Intersect N and S line 15 lks

136

Subdivision of T. 2 North R. 33 East

Willamette Meridian, Oregon.

(8093-10 M.)

N of cor to sees 4, 5, 8 and 9.
Thence N 89° 53' W on true line
Va same

1000 Umatilla river 75 lbs at curve from S.E. to S.W.

2400 Same at It.

3500 Hayon road to agency S.E. & N.W.

3990 Set post 3 ft long, 3 ins square
24 ins in the ground marked
↓ 1/4 S on N face for 1/4 sec. cor.

from which
A balun 14 ins. diam. bears N 45° E

150 lbs dist marked 1/4 S. B. T.

A balun 4 ins diam bears S 68° E

40 lbs dist marked 1/4 S. B. T.

4100 Center brush

50.00

7980

lost to sees 5, 6, 7 and 8

Land bottom Soil 1st rate

Heavy underbrush 79.80 chs

and some Balun & pine timber

Subdivisions of T. 2 North R. 88 East
Willamette Meridian, Oregon.

Went on town line bet secs 6 & 7
C^o 21° East

750 Unmatilla river 150 lbs S. W.

2000 Bluff rock 10 ft high S. W.

3300 Bluff and scattered bottom

4000 A balun 4 ins diam which I mark

$\frac{1}{4}$ S on N face for $\frac{1}{4}$ sec cor from which
A balun 4 ins diam bears N 40° E 40 lbs dist
marked $\frac{1}{4}$ S. B. T.

A balun 8 ins diam bears S 10° W 55 lbs dist
marked $\frac{1}{4}$ S. B. T.

7650. Intersect W bdy Township 375 lbs N
of cor. to secs 1 and 12 T 2 N. R 88 E
Set post 4 ft long 4 ins square 2 1/2 ins
in the ground for closing cor to secs
6 and 7 marked

C. C. T 2 N R 88 E on E face
S 6 on N and S 7 on S faces with
5 notches on S and 1 notch on N edges
raised mound of stone around it
Land bottom Pine & Balun Timber & brush
63.50 chs

Subdivisions of T. 2 North R. 33 East
 Willamette Meridian, Oregon.

(8093-10 M.)

North on ran bet sees 5th & 6
 Va 21° East

Set temporary ~~mark~~ at 20
 40th and 60 chains and at

7550 Intersect N. bdy Township 40th N. E
 of cor to see 5.6. 31st & 32nd Thence
 S 18° E on true line
 Va 21½° East

1000 Guleb W - 20

1550 Set post 8 ft long zinc square 24 ins
 in the ground for ^{1/4} sec cor
 marked ^{1/4} S on W face dug pits
 18 x 18 x 12 ins Nth & Sth of post 5½ ft dist
 raised mound of earth ½ ft high
 3½ ft base ^{mound} around it

2650 Wagon road Eth & W.

3550 Deposited charred stake 12 ins
 in the ground for ^{1/4} sec
 cor. dug pits 18 x 18 x 12 ins
 Nth & Sth of stake 5½ ft dist
 raised mound of earth

Subdivisions of T. 2 North R. 33 East
Willamette Meridian, Oregon.

1 1/2 ft high 3 1/2 ft base
over it dug in N. pit
drove stake 2 ft long
2 ins square 12 ins in
the ground, marked
1/4 S on N face

*
7150 Umatilla river forks runs W.
7550 Cox to secs 5, 6, 7 and 8.
Land rolling hills
Soil 1st and 2nd grade
Bunch grass short
The N 1/2 of sec 5 can be
cultivated

Aug. 31st 1887,

*5550 Deposited charred stake 12 ins in the
ground for 1/16 Sec cor dug pits 18x18x12
ins N & S of stake 5 1/2 ft deep & raised
a mound of earth 1 1/2 ft high 3 1/2 ft base
over it in N pit drove stake 2 ft long
2 ins square 12 ins in the ground marked
1/16 S. on N face.

(8093-10 M.)

General Description

This Township is rough and mountainous only in S.E.S.

86 & 25; the balance is rolling ^{or} level.

The soil is a light loam very little in cultivation

Grass is about killed out by stock.

The Umatilla River runs from E. to W. across N. portion of Township.

Some level land along the river with high hills or bluffs on N. side.

Considerable Balsam Timber and Thorn brush along river bottoms

Subdivisions of T. 2 North R. 33. East
 Willamette Meridian, Oregon.

In accordance with
 the requirements of the ma-
 nual of surveys, we have
 carefully used the adjust-
 ment of our instruments
 daily - weather permitting -
 during the progress of the
 surveys represented by the
 foregoing field notes and
 in all cases the instruments
 were found to be in cor-
 rect adjustment -

James P. Currier
 James E. Notland
 U. S. Dept. - Surveyors

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by Jas P Currie
and Jas Noland, U. S. Deputy Surveyor, to assist in
running, measuring, and marking the lines and corners described in the
foregoing field notes of the survey of the
Subdivisional lines of Township 2 North
Range 33 East Willamette Meridian, Oregon,
showing the respective capacities in which they acted:

- J. D. Woolley, Compassman.
- J. S. Medley, Chainman.
- W. H. Medley, Chainman.
- Frank Belshaw, Chainman.
- Guy Davis, Chainman.
- B. B. Brown, Axman.
- Frank Rowitz, Axman.
-, Flagman.

FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted Jas P Currie
Jas Noland, U. S. Deputy Surveyor, in surveying
all those parts or portions of the
Subdivisional lines of Township 2 North
Range 33 East Willamette Meridian, Oregon,
as represented in the foregoing field notes as having been surveyed by
him and under his direction; and that said survey has been in all respects,
to the best of our knowledge and belief, well and faithfully surveyed,
and the corner monuments established, according to the instructions
furnished by the U. S. Surveyor General of Oregon.

- J. D. Woolley, Compassman.
- J. S. Medley, Chainman.
- W. H. Medley, Chainman.
- Frank Belshaw, Chainman.
- Guy Davis, Chainman.
- B. B. Brown, Axman.
- Frank Swans, Axman.
-, Flagman.

Subscribed and sworn to before me this 31st day of
August, 1887



James E. Noland
U. S. Deputy Surveyor

FINAL OATH OF DEPUTY SURVEYOR.

We, James P. Currier and James E. Roland, United States
Deputy Surveyor, do solemnly swear that in pursuance of instructions
received from Douglas H. Taylor, U. S.

Surveyor General for Oregon, bearing date of the 13th

day of May, 1887. We have well, faithfully,
and truly, in my ^{own} proper person, and in strict conformity with the
instructions furnished by the U. S. Surveyor General for Oregon, the
Surveying Manual, and the laws of the United States, surveying all

those parts or portions of Township 2 North

Range 33 East

Willamette Meridian, in the State of Oregon, as are represented in the
foregoing field notes as having been surveyed by me and under my
directions; and I do further solemnly swear that all the corners of said
survey have been established and perpetuated in strict accordance with
the Surveying Manual, printed instructions, the special written instruc-
tions of the U. S. Surveyor General for Oregon, and in the specific man-
ner described in the field notes, and that the foregoing are the *true* field
notes of such survey, and should any fraud be detected I will suffer the
penalty of perjury under the provisions of an act of Congress approved
August 8, 1846.

James P. Currier James E. Roland
U. S. Deputy Surveyor. S

Subscribed and sworn to before me this Fifteenth
day of February, 1888

Oliver Woodcock
Notary Public
for Oregon

Office of U. S. Surveyor General,

Portland, Oregon, ^{July} July 30th, 1888.

foregoing
The following Field Notes of the Survey of the

Subdivisional lines of
Township 2 North Range
33 East Will Mer Or.

executed by James P. Currier and James E. Nolan
Special Joint U. S. Deputy Surveyors
under ~~his~~ Contract No., dated May

4th, 1887, having been critically examined,
the necessary corrections and explanations made, the
said Field Notes and the survey they describe, are
hereby approved.

Douglas W. Taylor -

Surveyor General.