


FIELD NOTES

Of the survey of the Subdivisional
 Lines of Township 2 South Range
36 East of, Willamette Meridian,
 Oregon, as surveyed by Rufus S. Moran
 U. S. Deputy Surveyor, under his Contract No. 451
 dated June 12, 1882

Survey commenced, September 20th 1882
 Survey completed, September 29th 1882

NAMES AND DUTIES OF ASSISTANTS.

-, Compassman.
- James Guttridge, Chainman.
- John Guttridge, Chainman.
-, Chainman.
-, Chainman.
- Joe Parodi, Axeman.
-, Axeman.
-, Flagman.

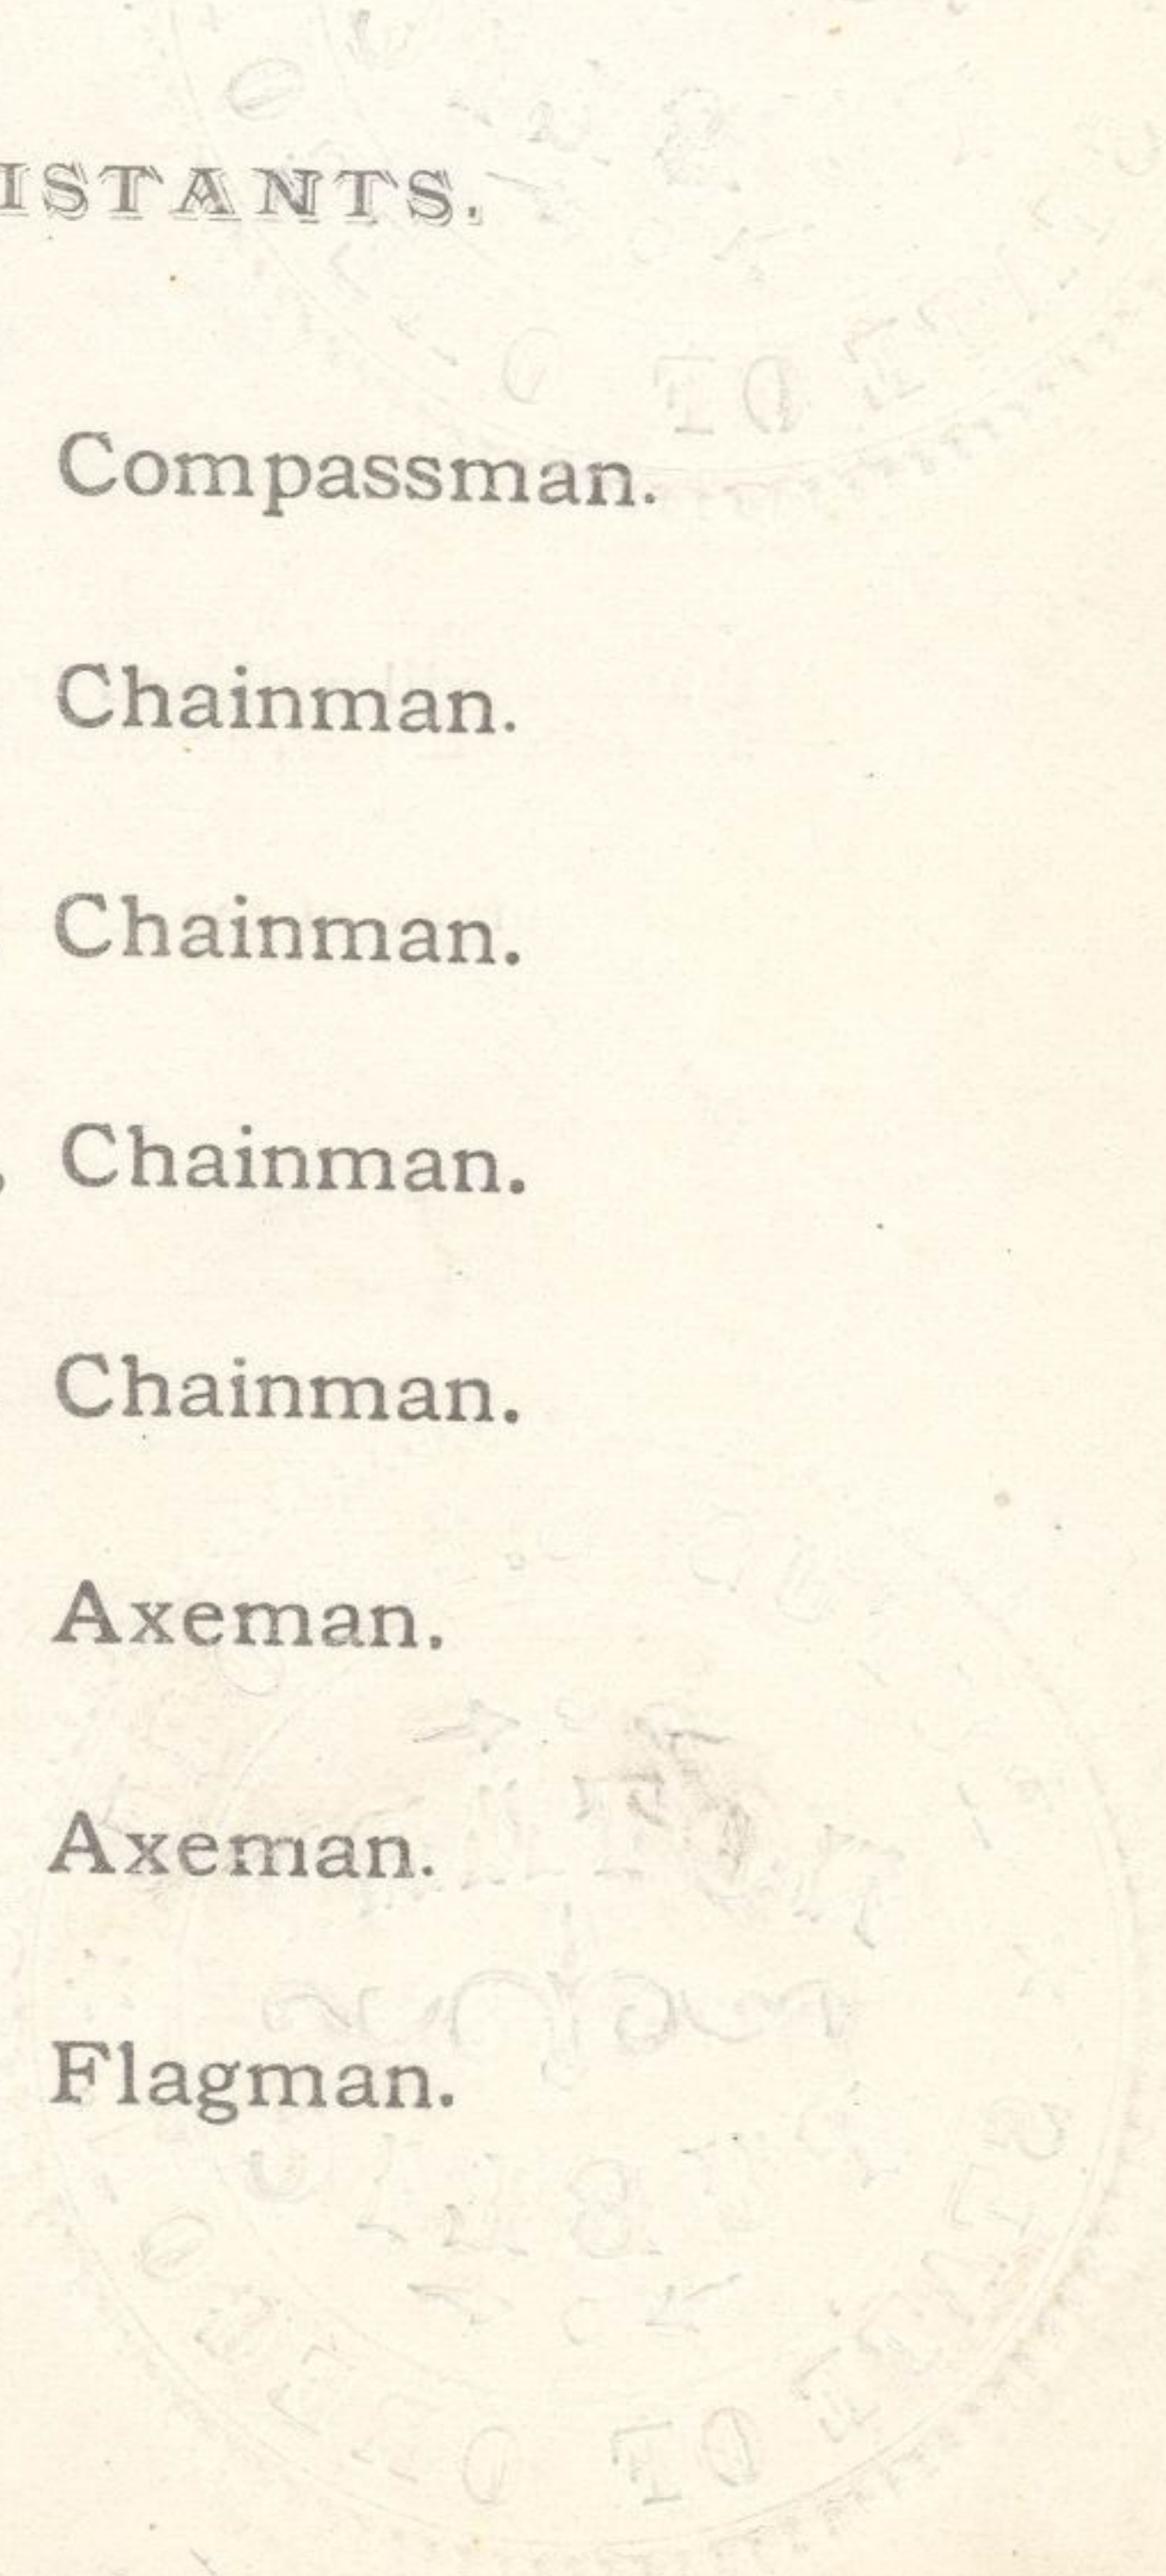

PRELIMINARY OATHS OF ASSISTANTS:

We, James Guttridge and John Guttridge

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the Subdivisional
 lines of Lower 2 South
Range 35 East of Willamette Meridian, Oregon.

James Guttridge, Chainman.
John Guttridge, Chainman.
 _____, Chainman.
 _____, Chainman.

Subscribed and sworn to before me, this Fifteenth
 day of August 1882

[SEAL.] _____
Rufus S. Moon
 Notary Public

We, Joseph Parodi and


do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability,

in the survey of the Subdivisional line of Lower
2 South Range 35 East Willamette Meridian, Oregon.

Joe Parodi, Axeman.
 _____, Axeman.

Subscribed and sworn to before me, this Fifteenth
 day of August 1882

[SEAL.] _____
Rufus S. Moon
 Notary Public

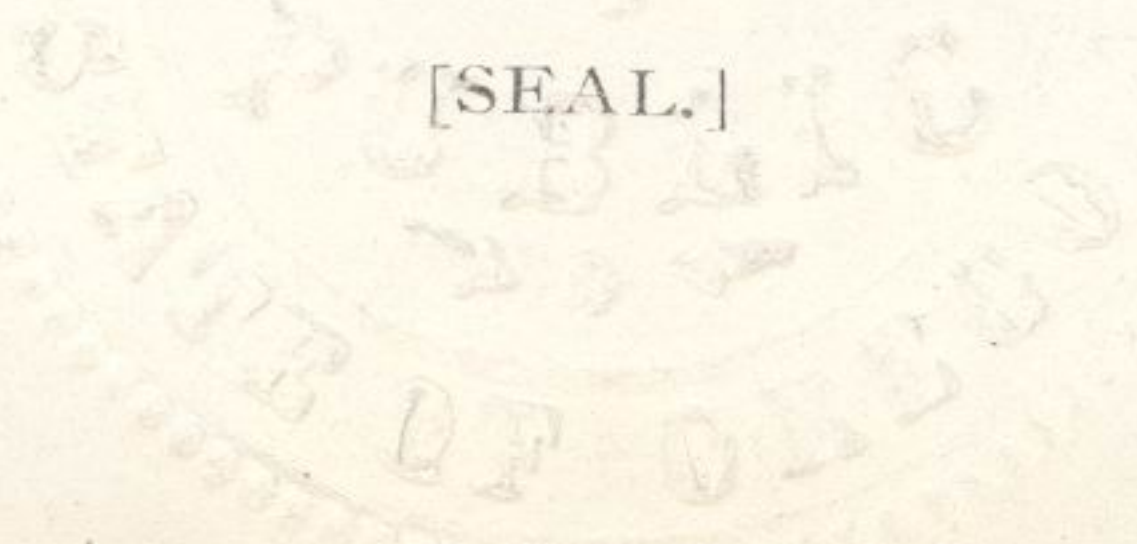

INDEX.

Referring the Lines to the Pages of the field Notes.

T. *2 South* R. *35 East* Will. Mer.

6	103	5	76	4	58	3	38	2	20	1							
-----		101	-----		75	-----		56	-----		37	-----		18			
7	99	8	73	9	54	10	35	11	16	12							
-----		98	-----		96	-----		71	-----		53	-----		34	-----		14
18	94	17	69	16	51	15	32	14	12	13							
-----		92	-----		91	-----		68	-----		49	-----		31	-----		10
19	89	20	66	21	48	22	29	23	9	24							
-----		86	-----		85	-----		65	-----		46	-----		27	-----		7
30	84	29	63	28	44	27	25	26	5	25							
-----		82	-----		81	-----		62	-----		43	-----		24	-----		3
31	78	32	61	33	41	34	22	35	1	36							

Meanders of ----- Pages ----- to -----

Meanders of ----- Pages ----- to -----

pages 942 + 943
are blank

Subdivision of T. 2 South R. 35 East

Willamette Meridian, Oregon.

944
945
946
947
948
949
950

Preliminary to commencing this Survey I run North on a blank line on East boundary of sec. 36 and at 39,91 chs I found the $\frac{1}{4}$ sec. cor. and at 79,92 chs I found the sec. cor.

Thence I run, commencing at the township cor.

S 89° 49' W On a blank line on the South boundary of Sec. 36, and at 40,05 chs. I found the $\frac{1}{4}$ sec. cor. and at 80,05 chs. I found the sec. cor. My Compass will therefore run the same line as the Exterior boundaries and the chaining practically agrees

Subdivision of T. 2 South R. 35 East

Willamette Meridian, Oregon.

Survey commenced September 20th 1882
with a Burt's Solar Compass

I begin at the cor. to sec. 1, 2, 35 &
36 on the South boundary of the
township which is a post 5 ins sq.
marked. T 2 S S 36 on W E

R 35 E S 1 on S E

T 3 S. S 2 on S W and S 35 on
NW. face, with 1 notch on E and
5 notches on W. edges.

from which

A pine 15 ins. in dia. bears S 50° E 55 lks.
dist. marked - T 3 S R 35 E S 1 B F

A tamarack 20 ins. in dia. bears N 56° W 30 lks.
dist. marked, T 2 S R 35 E S 35 B F

A pine 26 ins. in dia. bears S 34° W 67 lks.
dist. marked T 3 S, R 35 E S 2 B F

A tamarack 6 ins. in dia. bears N 60° E 8 lks.
dist. marked T 2 S R 35 E S 36 B F

I run

North between Secs. 35 & 36,
Var 20° 15' East

Subdivisions of T. 2 South R. 35 East

Willamette Meridian, Oregon.

with pine, fir, tamarack and
spruce and dense undergrowth
of pine, fir, tamarack, spruce
and mountain laurel.

From the Cor. to sec. 2 + 3, 34 + 35 on
the South boundary of the town-
ship, which is a post 4 mis. sq.
marked, T 2 S R 35 on NE

R 35 E S 2 on SE

T 3 S S 3 SW and S 34 on NW.

face, with 2 notches on E. & 4 notches
on W. face, from which

A fir 22 mis. in dia. bears $N 4^{\circ} E$ 24 k. dist.
marked T 2 S R 35 E S 35 B F

A fir 14 mis. in dia. bears $N 65^{\circ} W$ 36 k.
dist. marked T 2 S R 35 E S 34 B F

A fir 16 mis. in dia. bears $S 69^{\circ} W$ 43 k. dist.
marked T 3 S R 35 E S 3 B F

I run

North between Secs. 34 & 35

$T. 20^{\circ} 15'$ East

Subdivision of T. 2 South R. 35 East

Willamette Meridian, Oregon.

From the cor to sees. 3 & 4, 33 & 34
on the South boundary of the town-
ship which is a post 4 ins sq. marked

T 2 S S 34 on NE

R 35 E S 3 on SE

F 3 S S 4 on SW and S 33 on

WW. faces. with 3 notches on E and

W. faces.

from which

A pin 22 ins. in dia. bears N 88° E. 48 lks. dist.

marked T 2 S R 35 E S 34 B F

A pin 24 ins. in dia. bears N 40° W 15 lks.

dist. marked T 2 S R 35 E S 33 B F

A pin 13 ins. in dia. bears S 5° E 23 lks. dist.

marked T 3 S R 35 E S 3 B F

Draw

North between Seas. 33 & 34

Var 50° 45' East

14,75 Dry gulch corner W 50 ft. below sea,
cor.

40,00 Det a post 3 ft long 3 ins. sq. 24 ins. in
ground for 1/2 sec cor. marked 1/4 S on

W. face

from which

1010

Subdivision of T. 2 South R. 35 East
Willamette Meridian, Oregon.

Compared Compass
with line established by an obser-
-vation on the star Polaris and
find Compass agrees with
line thus established

September 25th 1882

From the cor. to sec. 4, 5, 32 & 33
on the South boundary of the
township, which is a post 4 in. sq
marker. T 2 S R 35 E

R 35 E S 4 on S E

T 3 S. S. 5 on S W and S 32 on N W.
facis, with 4 notches on E, and 2
notches on W, facis, from which

A tamarack 14 in. in dia. bears S 34° E 10 lks.
dist. marked. T 3 S R 35 E S 4 B F

A tamarack 10 in. in dia. bears S 50° W
2 1/2 lks. dist. marked. T 3 S R 35 E S 5 B F

A tamarack 14 in. in dia. bears N 41° W 38 lks.
dist. marked. T 2 S R 35 E S 32 B F

A tamarack 10 in. in dia. bears N 18° E

Subdivision of T. 2 South R. 35 E 1911
Willamette Meridian, Oregon.

37 lrs. dist. marked T 2 S R 35 E S 33 B J
Iron

North bet. Secs. 32 & 33

γ 18° 45' East

4000 Set a post 3 ft. long 3 ins. sq. 24 ins.
in ground for $\frac{1}{4}$ sec. cor. 50 ft.
above sec. cor. marked $\frac{1}{4}$ S on W.
face. from which

A fir *Pinus. india.* bears S 58° E 52 lrs.
dist. marked $\frac{1}{4}$ S B J

A pine *Pinus. india.* bears S 70° W 15 lrs.
dist. marked $\frac{1}{4}$ S B J

8000 Set a post 4 ft. long 4 ins. sq. 24 ins.
in ground for cor. to secs. 28, 29, 32 &
33. 50 ft. above $\frac{1}{4}$ sec cor. marked

T 2 S R 35 E S 28 on NW

T 2 S R 35 E S 29 on NW

S 32 on SW and S 33 on S. E. face

with 1 notch on S and 4 notches on
E. edges. from which

A pine 5 ins. in dia. bears N 42° E 27 lrs. dist.
marked T 2 S R 35 E S 28 B J

Subdivision of T. 2. South R. 35 East
Willamette Meridian, Oregon.

From the cor. to sec. 5. 6. 31 & 32
on the South boundary of the
township which is a post 4 in sq.
marked - T 2 S S 32 on N E

R 35 E S 5 on S E

T 3 S S 6 on S W and S 31 on
N. W. face, with 5 notches on E

and 1 notch on W. edge, in mound of
stone 18 in, high 3 1/2 ft ^{around post} from which

A pine 26 in. in dia. bears N 51° W 14 l. R.
dist. marked. T 2 S R 35 E S 31 B F

A pine 15 in. in dia. bears S 30° E 12 l. R.
dist. marked. T 3 S R 35 E S 5 B F

A fir 10 in. in dia. bears N 77° E 70 l. R. dist.
marked. T 2 S R 35 E S 32 B F

I run

North between Sec. 31 & 32

Var. 23° 40' East

4.00 Descend hill and enter opening
bears NW & SE

5.33 Old Daly road bears NW & SE and
shup corral bears N 45° W about

1058

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by Rufus S. Moore, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field notes of the survey of the Subdivisional lines of Town 2 South Range 35 East of Willamette Meridian, Oregon, showing the respective capacities in which they acted :

- _____, Compassman.
- James Guttridge, Chainman.
- John Guttridge, Chainman.
- _____, Chainman.
- _____, Chainman.
- Joe Parodi, Axeman.
- _____, Axeman.
- _____, Flagman.

FINAL OATHS OF ASSISTANTS

We hereby certify that we assisted Rufus S. Moore, U. S. Deputy Surveyor, in surveying all those parts or portions of the Subdivisional lines of Town 2 South of Range 35 East of Willamette Meridian, Oregon, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- _____, Compassman.
- James Guttridge, Chainman.
- John Guttridge, Chainman.
- _____, Chainman.
- _____, Chainman.
- Joe Parodi, Axeman.
- _____, Axeman.
- _____, Flagman.

Subscribed and sworn to before me, this Twenty First day of November 1882
 [SEAL.] Rufus S. Moore
 Notary Public

FINAL OATH OF DEPUTY SURVEYOR.

1957

I, Rufus S. Moore

United States Deputy Surveyor, do solemnly swear that in pursuance of in-

structions received from James C. Selman

U. S. Surveyor General for Oregon, bearing date of the Twelfth

day of June, 1882, I have well, faith-
fully and truly, in my own proper person, and in strict conformity with
the instructions furnished by the U. S. Surveyor General for Oregon, the
Surveying Manual, and the laws of the United States, surveying all those

parts or portions of The Subdivisional Lines of
Town 2 South Range 35 East of

Willamette Meridian, in the State of Oregon, as are represented in the fore-
going Field Notes as having been surveyed by me and under my directions;
and I do further solemnly swear that all the corners of said survey have been
established and perpetuated in strict accordance with the Surveying Manual,
printed instructions, the special written instructions of the U. S. Surveyor
General for Oregon, and in the specific manner described in the field notes,
and that the foregoing are the *true* field notes of such survey, and should
any fraud be detected I will suffer the penalty of perjury under the pro-
visions of an Act of Congress approved August 8, 1846.

Rufus S. Moore
U. S. Deputy Surveyor.

Subscribed and sworn to before me, this 10th
day of February 1883

Benford Robb
Notary Public

1058

Office U. S. Surveyor General,

Portland, Oregon, June 5 1883

The following Field Notes of the Survey of the

Subdivisional lines of
T2 South, R. 35 East

Will. Meridian, Oregon,

executed by Rufus S. Moore

under his Contract No. 451, dated June 12th

1882, having been critically examined, the
necessary corrections and explanations made, the said field notes
and the survey they describe, are hereby approved.

James C. Tolman

Surveyor General.