

FIELD NOTES

Of the survey of the Subdivisional

Lines of Township 3 South Range

No 35 East of, Willamette Meridian,

Oregon, as surveyed by Rufus S. Moore

U. S. Deputy Surveyor, under his Contract No. 451

dated June 12, 1882

Survey commenced, September 10th 1882

Survey completed, September 18th 1882

NAMES AND DUTIES OF ASSISTANTS.

R. S. Moore, Compassman.

James Guttridge, Chainman.

John Guttridge, Chainman.


_____, Chainman.

_____, Chainman.

Joseph Parodi, Axeman.

_____, Axeman.

_____, Flagman.

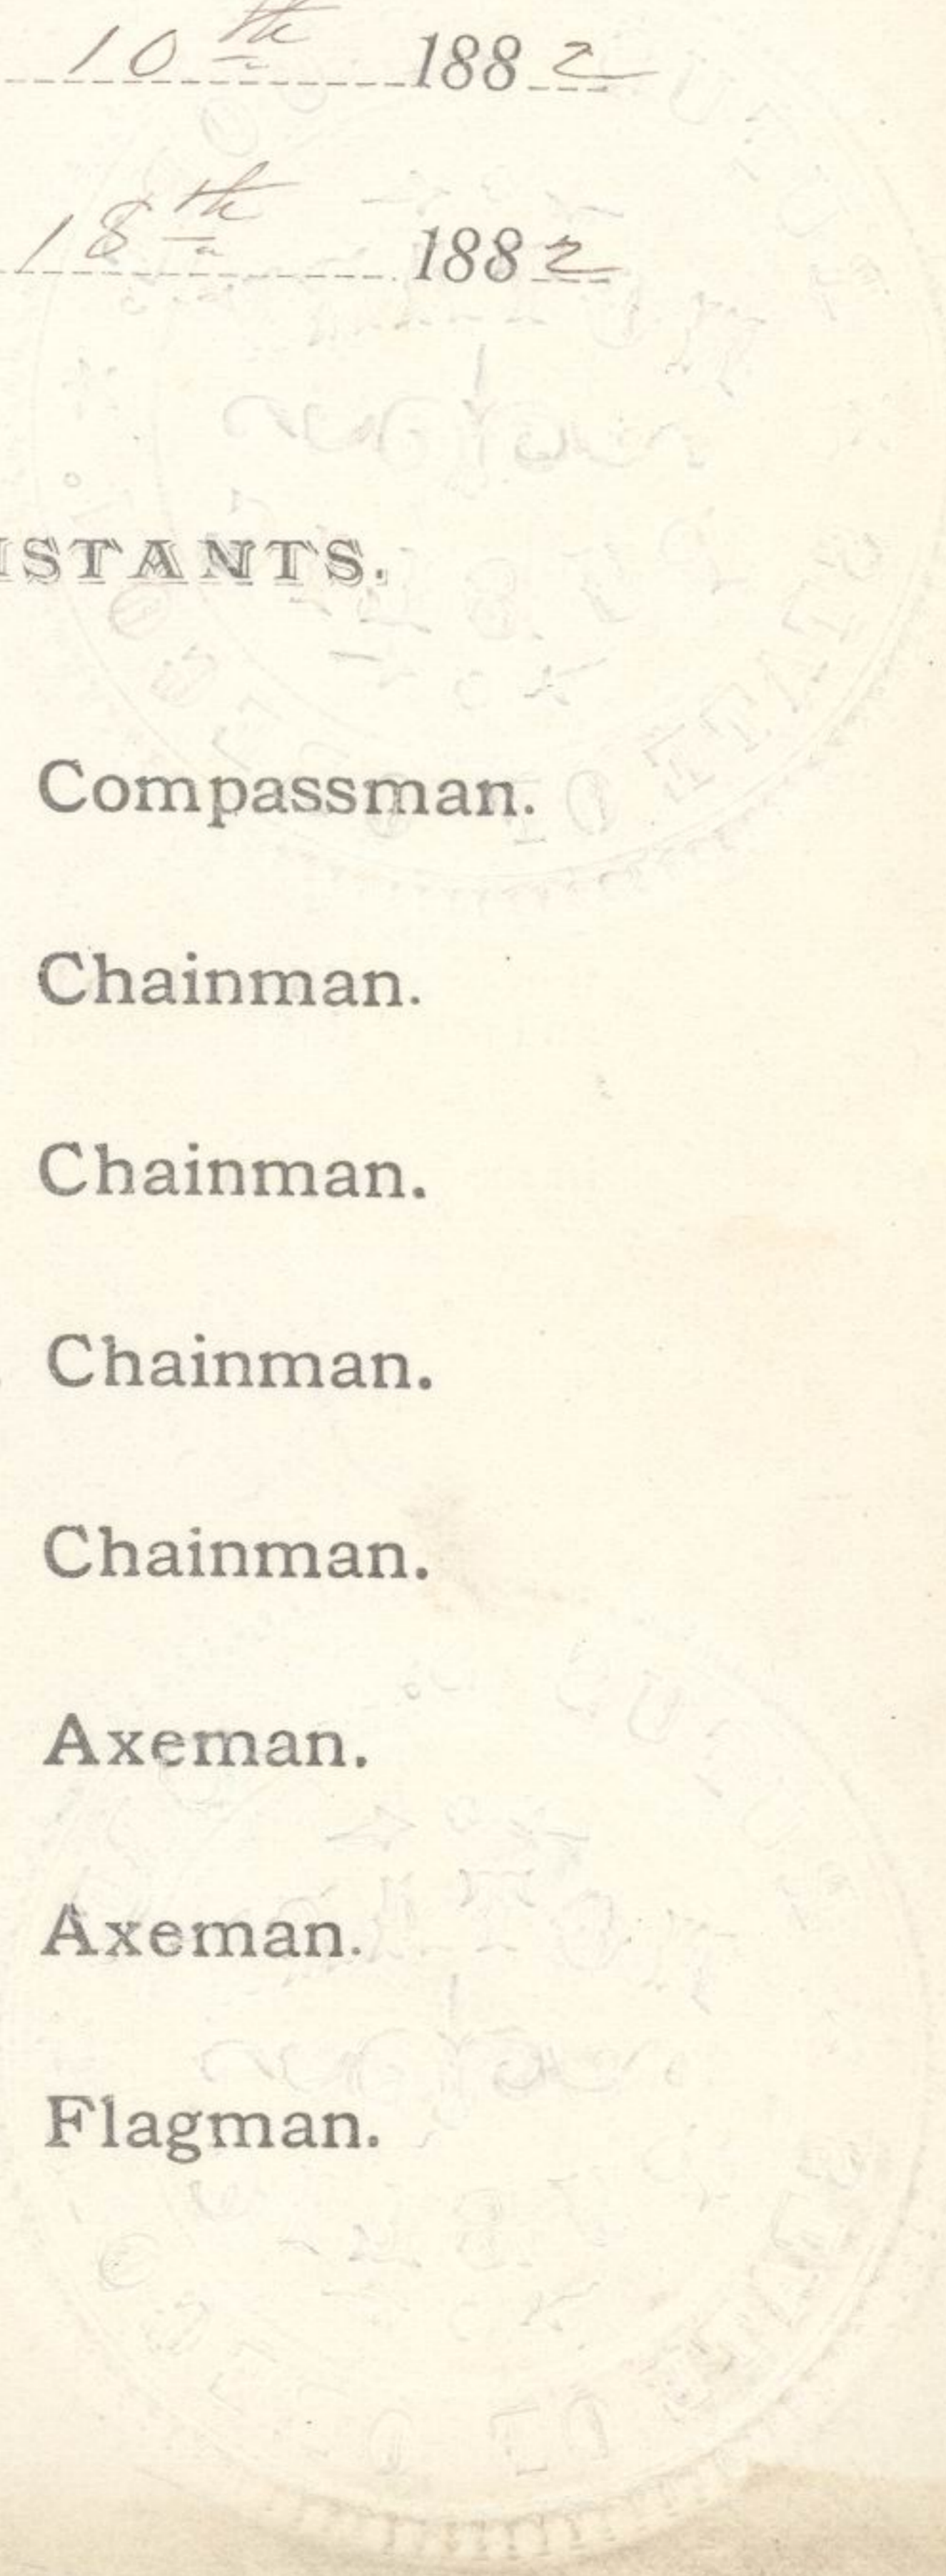

1A

V

PRELIMINARY OATHS OF ASSISTANTS:

We, James Guttridge and
John Guttridge

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the Subdivisional
lines of Township 3 South
Range No. 35 East of Willamette Meridian, Oregon.

James Guttridge, Chainman.

John Guttridge, Chainman.

, Chainman.

, Chainman.

Subscribed and sworn to before me, this Fifteenth

day of August 1882

[SEAL.]

Rufus S. Moore
Notary Public

We, Joe Parodi and

do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability,

in the survey of the Subdivisional lines of
Town 3. S. R. 35 East of Willamette Meridian, Oregon.

Joe Parodi, Axeman.

, Axeman.

Subscribed and sworn to before me, this Fifteenth

day of August 1882

[SEAL.]

Rufus S. Moore
Notary Public

INDEX.

Referring the Lines to the Pages of the field Notes.

T. *3 South* R. *35 East* Will. Mer.

6	96	5	71	4	55	3	38	2	20	1
94		93		70		53		36		18
7	92	8	68	9	51	10	35	11	16	12
90		89		67		50		34		15
18	88	17	66	16	49	15	32	14	13	13
85		84		64		47		31		11
19	82	20	63	21	46	22	29	23	9	24
80		79		62		45		28		8
30	78	29	60	28	43	27	26	26	6	25
76		75		58		41		25		4
31	73	32	57	33	40	34	23	35	1	36

Meanders of _____ Pages _____ to _____

Meanders of _____ Pages _____ to _____

120

Subdivision of T. 3 South R. 35 East
Willamette Meridian, Oregon.

80.30 The cor. to secs 1, 2, 11 & 12
Land mountain side
Soil 2" rats
Heavily timbered with pine
fir and tamarack 71.215' etc
and some undergrowth of
pine, fir and tamarack.
Good bunch grass

North on a random line bet. Secs. 1 & 2
T₃ R₃₅ East

1.75 Dry ravine course East 25 ft. below
sec. cor. and ascent

40.00 Set temporary $\frac{1}{4}$ sec. cor. 300 ft. above
ravine

64.00 begin to descend

76.00 Dry gulch course NE

80.00 Intersect North boundary of the town
ship at the cor. to secs. 35, 36, 1 & 2
500 ft below $\frac{1}{4}$ sec. cor. which is

Subdivision of T. 3 South R. 35 East
Willamette Meridian, Oregon.

a post 5 ins. sq. marked -

F 2 S S 36 on W E.

R 35 E S 1 on S E

F 3 S S 2 on S W and S 35 on N W,

face, with 1 notch on E and 5 notches on W. edges. from which

A pine 15 ins. in dia. bears S 50° E 55 lks.

dist. marked F 3 S R 35 E S 1 B F

A tamarack 20 ins. in dia. bears N 56° W 30 lks. dist.

marked F 2 S R 35 E S 35 B F

A pine 26 ins. in dia. bears S 34° W 67 lks. dist.

marked F 3 S R 35 E S 2 B F

A tamarack 6 ins. in dia. bears N 60° E 8 lks.

dist. marked F 2 S R 35 E S 36 B F

Thence I run

South on a true line bet. sees. 1 & 2

To 20° 15' East

40.00 Set a post 3 ft. long 3 ins. sq. 24 ins. in ground for 1/4 sec. cor. marked 1/4 S on W. face. from which

A fir 16 ins. in dia. bears East 18 lks. dist.

marked 1/4 S B F

9830

Subdivision of T. 3 South R. 35 East
Willamette Meridian, Oregon.

North on a random line bet. Sec. 2 & 3
Cor. 79° 45' East

28.00 Dry gulch corner N E

40.00 Set temporary 1/4 sec. cor.

79.90 Interest N. boundary of the town-
ship 14 lks. East of the cor. to sec.
34, 35, 2 + 3 which is a past 4 in.
sq. marked F 2 S 35 on N E
R 35 E S 2 on S E

F 3 S 3 on S W and S 3 4 on
N W. faces, with 2 notches on E,
and 4 notches on W. edge

from which

A fir 22 in. in dia. bears N 4° E 24 lks.
dist. marked F 2 S R 35 E S 35 B F

A fir 14 in. in dia. bears N 65° W 36 lks. dist.
marked F 2 S R 35 E S 3 4 B F

A fir 16 in. in dia. bears S 69° W 43 lks.
dist. marked F 3 S R 35 E S 3 B F

Then a S-run

S 6 E. on a true line bet. sec. 2 & 3

Cor. 20° 15' East

Subdivision of T. 3 South R. 35 East
Willamette Meridian, Oregon.

Northward random line bet. Secs. 3 & 4
to 22° East

3.50 Enter bottom bears E & W and
brook 3 lks. wide runs N.E.
line runs up bottom

9.30 Reel 10 lks. wide runs S.E. 20 ft.
below sec. cor.

9.70 Leave bottom and ascend hill
bears N.W. & S.E.

40.00 Set temporary $\frac{1}{4}$ sec. cor. on W.
hillside 150 ft. above bottom
thence along hillside through
dense brush

79.82 Intersect N. boundary of the
township 18 lks. E. of the cor.
to sec. 33, 34, 3 & 4 which is a
past 4 ms. sq. marked

F 2 S. S 34 on N.E.

R 35 E S 3 on S.E.

F 3 S. S 4 on S.W. and S 33 on
N.W. faces with 3 notches on E.
and W. edges. from which

Subdivision of T. 3 South R. 35 East

Willamette Meridian, Oregon.

A fir 22 ins. in dia. bears $N 88^{\circ} E 48$ lks.
dist. marked $F 2 D R 35 E S 34 B J$

A pine 24 ins. in dia. bears $N 40^{\circ} W 15$ lks. dist.
marked $F 2 D R 35 E S 33 B J$

A fir 13 ins. in dia. bears $S 5^{\circ} E 23$ lks. dist.
marked $F 3 D R 35 E S 3 B J$

Thru a run

$S 8^{\circ} E$ on a true line bet. Secs 3 & 4
Va. $20^{\circ} 45'$ East
39.82 Set a post 3 ft. long 3 ins. sq. 24 ins.
in ground for $\frac{1}{4}$ sec. cor. marked
 $\frac{1}{4}$ S. on W. face, from which

A fir 18 ins. in dia. bears $S 53^{\circ} E 40$ lks.
dist. marked $\frac{1}{4} D B J$

A fir 18 ins. in dia. bears $S 63^{\circ} W 30$ lks.
dist. marked $\frac{1}{4} D B J$

79.82 Thru cor. to secs, 3, 4, 9 & 10

Land mountainous sloping
W. Soil 2" rate

Heavily timbered with pine, fir
& tamarack, and dense
undergrowth of pine, fir & tamarack.

Subdivision of T. 3 South R. 35 East
Willamette Meridian, Oregon.

Land mountainous.

Soil 2nd rate

Heavily timbered with pine, fir & tamarack, and dense undergrowth of pine, fir and tamarack.

Northward random line bet. Secs. 4 & 5
Var. 21° 30' East

- 3.50 Creek 7 R. wide runs SW
- 9.20 " 7 " " " SE
- 13.00 " 7 " " " SW
- 13.50 " 7 " " " SE
- 17.25 " 7 " " " SW

Ascend along hillside

- 36.75 Ravine course East
- 40.00 Set temporary $\frac{1}{4}$ sec. cor.
- 43.00 Ravine course S.E.
- 79.89 Intersect N. boundary of the town-
ship 20 R. E. of the cor. to sec.
32, 33, 4 & 5, which is a post
4 ms. sq. marked T 2 S. S 33 on N E

7/2

Subdivision of T. 3 South R. 35 East
Willamette Meridian, Oregon.

R 35-E S 4 on S E

T 3 S, S 5 on S W and S 3 2 on
NW. face, with 4 notches on E.
and 2 notches on W. edge.

from which

A tamarack 14 ins. in dia. bears S 34° E 10 lks,
dist. marked T 3 S R 35 E S 4 B F

A tamarack 10 ins. in dia. bears S 50° W 2 1/2 lks.
dist. marked T 3 S R 35 E S 5 B F

A tamarack 14 ins. in dia. bears N 41° W 38 lks.
dist. marked T 2 S R 35 E S 3 2 B F

A tamarack 10 ins. in dia. bears N 18° E 37 lks.
dist. marked T 2 S R 35 E S 3 3 B F

Thence I run

S. 9° E. on a true line bet. Decs. 4 & 5

Var. 18° 45' East

39.89 A pine 8 ins. in dia. which I mark
1/4 S. on W. face, for 1/4 sec. cor.

from which

A pine 8 ins. in dia. bears S 70° E. 15 lks. dist
marked 1/4 S B F

A pine 6 ins. in dia. bears N 60° W 12 lks. dist

Subdivision of T. 3 South R. 35 East
Willamette Meridian, Oregon.

49.00 Ravine course West 2,50 ft below
top of ridge, and Ascend

79.90

79.90 Intersect N. boundary of the town-
ship, 32 R. East of the cor. to sec.

31, 32, 5 & 6, 300 ft. above ravine
which is a post 4 in sq. marked

T 2 S. S 32 on N E

R 35 E S 5 on S E, - T 3 S S 6 on

S W and S 31 on NW. faces, with
5 notches on E and 1 notch on W. edge,

in mound of stone 18 in. high

3 1/2 ft. base around post.

from which

A pine 26 in. in dia. bears N 51° W 14 R.
dist. marked T 2 S R 35 E S 31 B F

A pine 15 in. in dia. bears S 30° E 12 R.
dist. marked, T 3 S R 35 E S 5 B F

A fir 10 in. in dia. bears N 77° E 70 R.
dist. marked, T 2 S R 35 E S 32 B F

Then I run

S 14° E on a true line bet. Secs. 5 & 6

To 23° 40' East

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by Rufus S. Moore, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field notes of the survey of the Subdivisional lines of Township 3 South Range No. 35 East of Willamette Meridian, Oregon, showing the respective capacities in which they acted :

- _____, **Compassman.**
- James Guttridge, **Chainman.**
- John Guttridge, **Chainman.**
- _____, **Chainman.**
- _____, **Chainman.**
- Joe Parodi, **Axeman.**
- _____, **Axeman.**
- _____, **Flagman.**

FINAL OATHS OF ASSISTANTS


We hereby certify that we assisted Rufus S. Moore, U. S. Deputy Surveyor, in surveying all those parts or portions of the Subdivisional lines of Town 3 South of Range No. 35 East of the Willamette Meridian, Oregon, as are represented in the foregoing field notes as having been surveyed by him and under his direction ; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- _____, **Compassman.**
- James Guttridge, **Chainman.**
- John Guttridge, **Chainman.**
- _____, **Chainman.**
- _____, **Chainman.**
- Joe Parodi, **Axeman.**
- _____, **Axeman.**
- _____, **Flagman.**

Subscribed and sworn to before me, this Twenty First day of November, 1882

[SEAL.] Rufus S. Moore

Notary Public

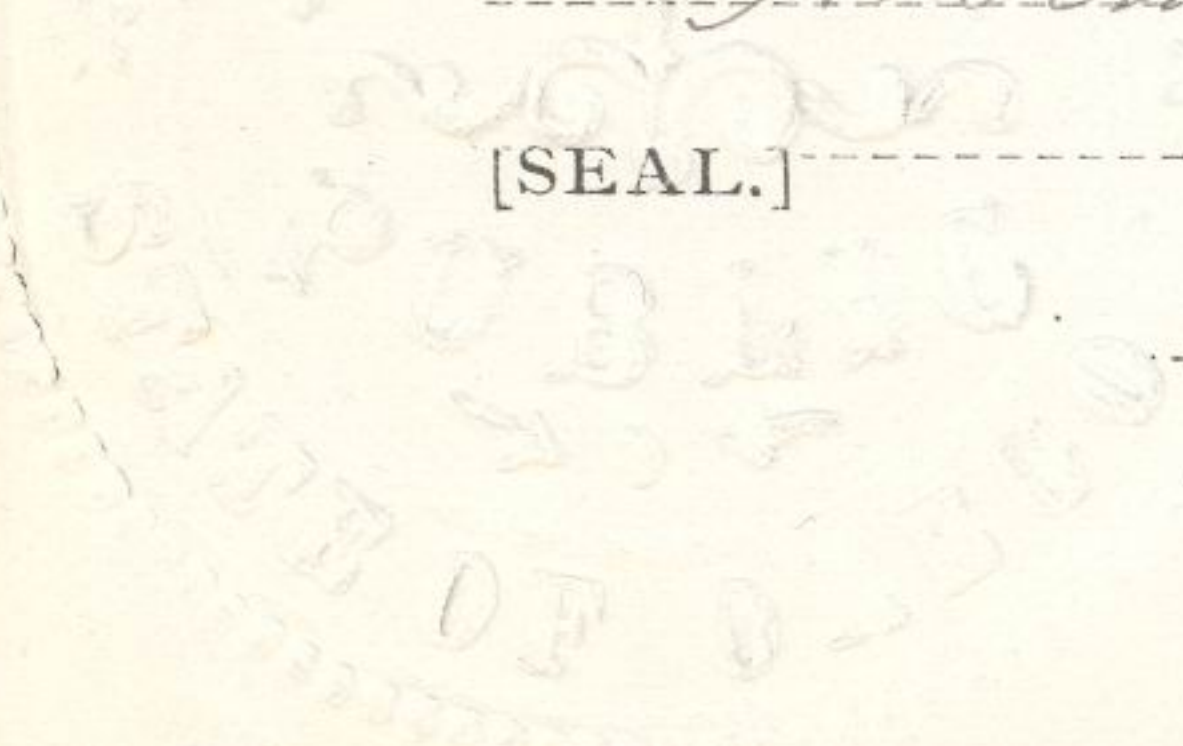

FINAL OATH OF DEPUTY SURVEYOR.

I, Rufus S. Moore

United States Deputy Surveyor, do solemnly swear that in pursuance of in-

structions received from James C. Latham

U. S. Surveyor General for Oregon, bearing date of the Twenty Eighth

day of June, 1882, I have well, faithfully and truly, in my own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor General for Oregon, the Surveying Manual, and the laws of the United States, surveying all those

parts or portions of the Subdivisional lot
of Township 3. South Range 35 East of

Willamette Meridian, in the State of Oregon, as are represented in the foregoing Field Notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions, the special written instructions of the U. S. Surveyor General for Oregon, and in the specific manner described in the field notes, and that the foregoing are the *true* field notes of such survey, and should any fraud be detected I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.

Rufus S. Moore
U. S. Deputy Surveyor.

Subscribed and sworn to before me, this 10th

day of February, 1883

Bamford Robb
Notary Public

104
Office U. S. Surveyor General,

Portland, Oregon, June 5 1883.

The following Field Notes of the Survey of the
Subdivisions of Township
3 South Range 35 East,
Will. Mer., Oregon

executed by

Rufus S. Moore

under his Contract No.

451

, dated

12th

June 1882, having been critically examined, the
necessary corrections and explanations made, the said field notes
and the survey they describe, are hereby approved.

James C. Tolman
Surveyor General.