


FIELD NOTES

Of the survey of the Subdivisional
 Lines of Township 2 South Range
36 East of, Willamette Meridian,
 Oregon, as surveyed by Rufus S. Moran
 U. S. Deputy Surveyor, under his Contract No. 451
 dated June 12, 1882

Survey commenced, September 20th 1882
 Survey completed, September 29th 1882

NAMES AND DUTIES OF ASSISTANTS.

-, Compassman.
- James Guttridge, Chainman.
- John Guttridge, Chainman.
-, Chainman.
-, Chainman.
- Joe Parodi, Axeman.
-, Axeman.
-, Flagman.

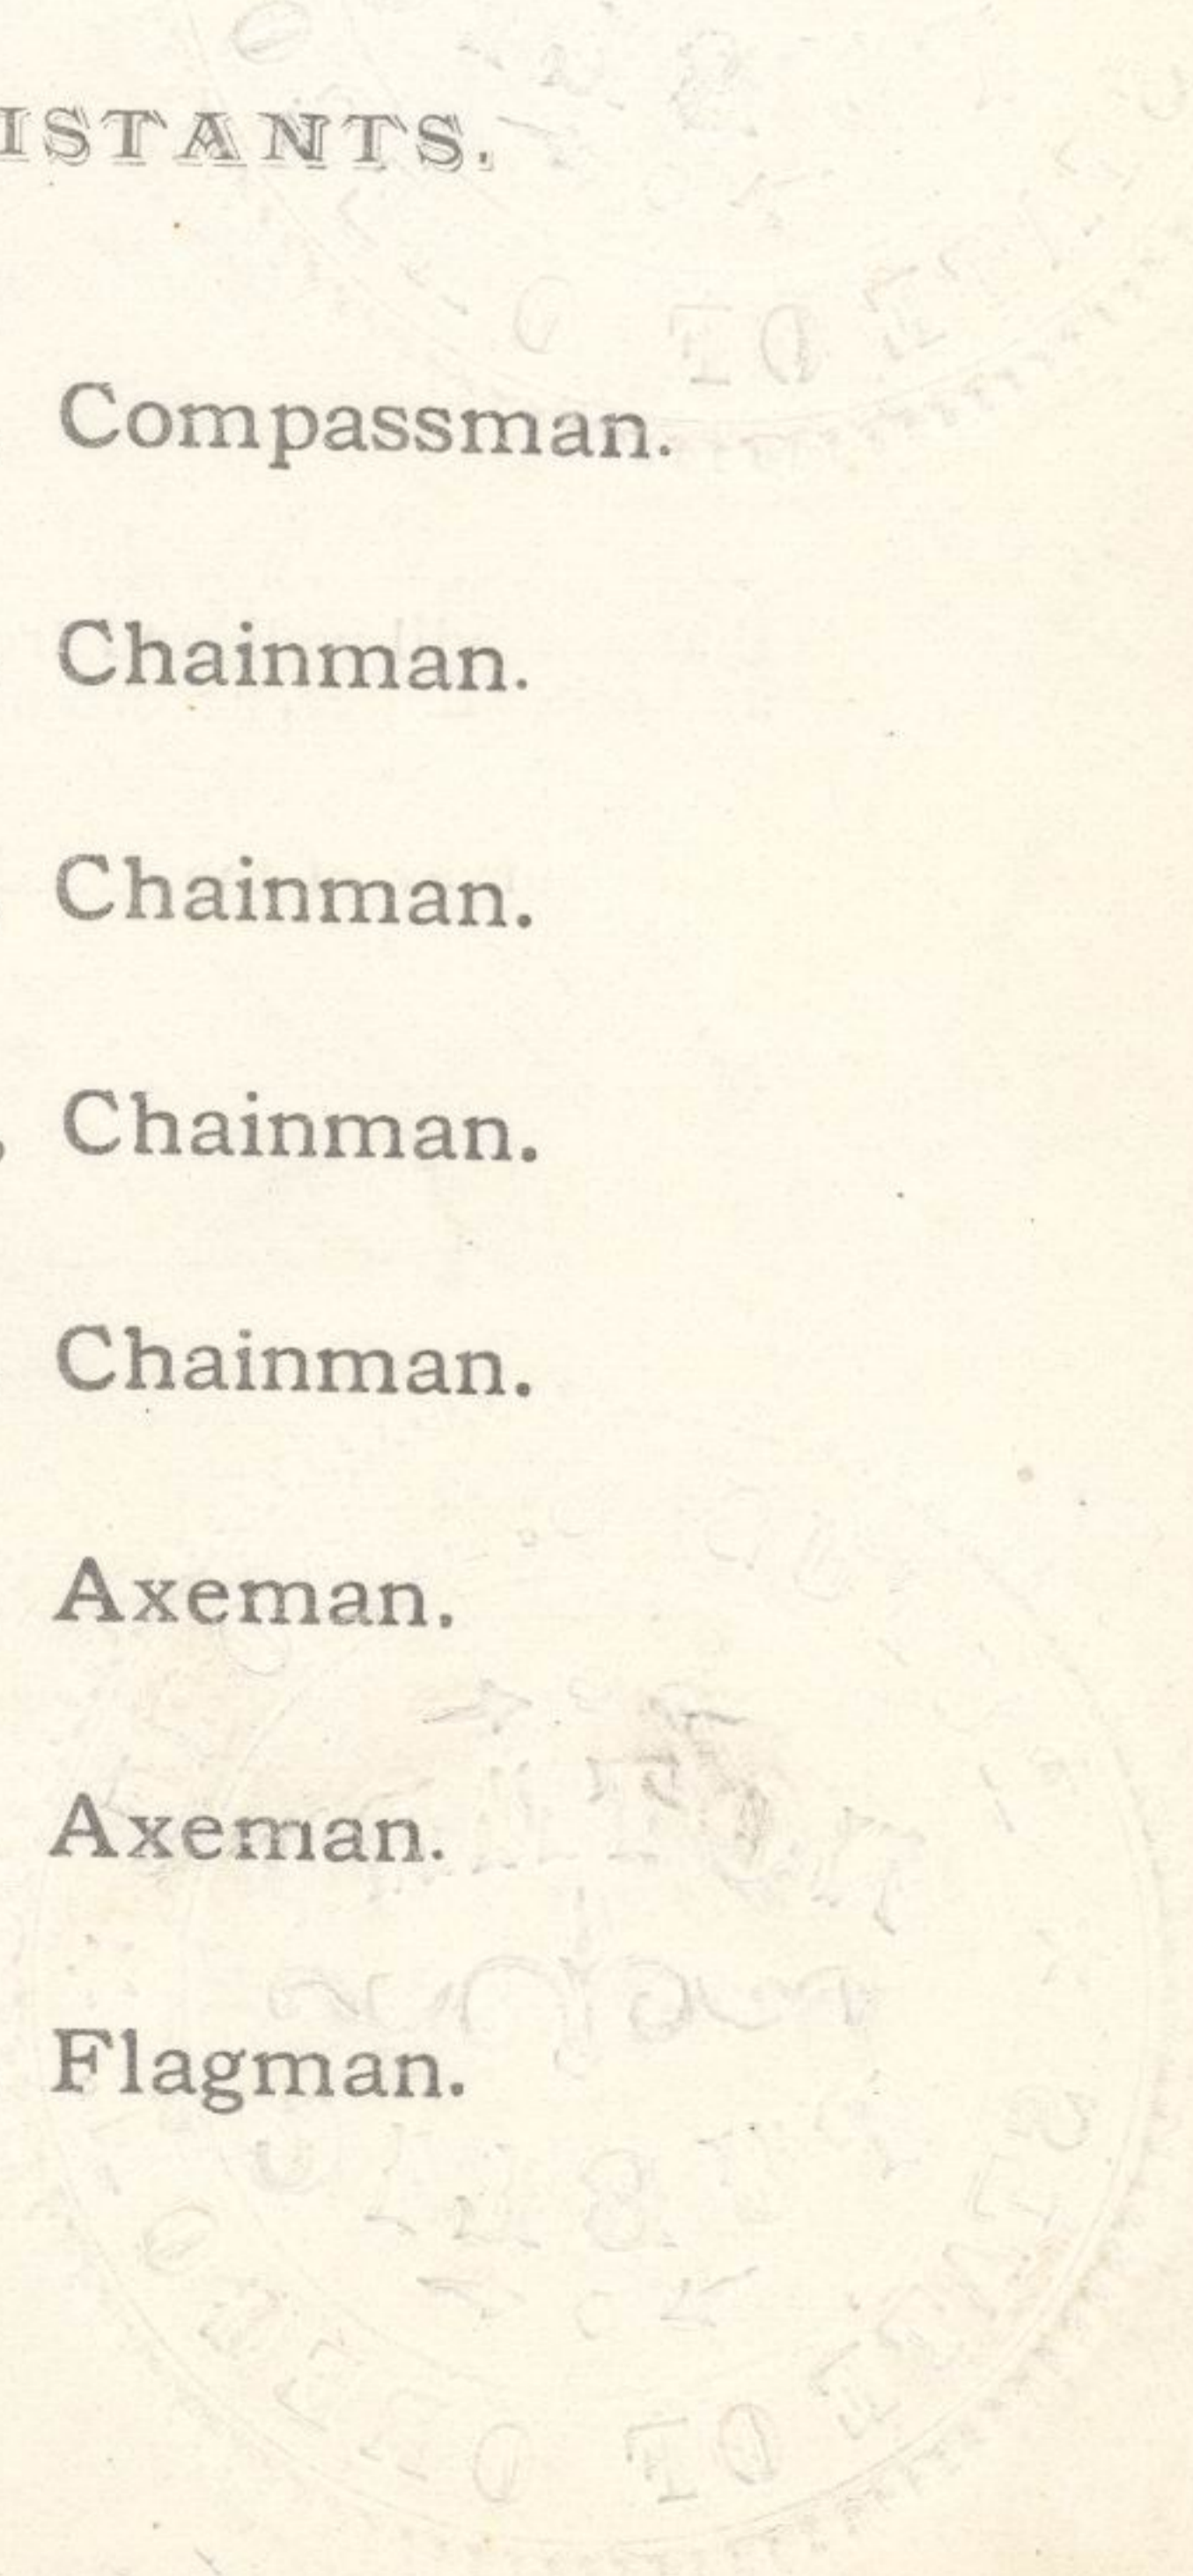

PRELIMINARY OATHS OF ASSISTANTS:

We, James Guttridge and John Guttridge

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the Subdivisional lines of Lower 2 South Range 35 East of Willamette Meridian, Oregon.

James Guttridge, Chainman.

John Guttridge, Chainman.

_____, Chainman.

_____, Chainman.

Subscribed and sworn to before me, this Fifteenth

day of August 1882

[SEAL.]

Rufus S. Moore
Notary Public

We, Joseph Parodi and

do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability,

in the survey of the Subdivisional line of Lower 2 South Range 35 East Willamette Meridian, Oregon.

Joe Parodi, Axeman.

_____, Axeman.

Subscribed and sworn to before me, this Fifteenth

day of August 1882

[SEAL.]

Rufus S. Moore
Notary Public

INDEX.

Referring the Lines to the Pages of the field Notes.

T. *2 South* R. *35 East* Will. Mer.

| | | | | | | | | | | | | | | | | | |
|-------|-----|-----|-------|----|----|-------|----|----|-------|----|----|-------|--|----|-------|--|----|
| 6 | 103 | 5 | 76 | 4 | 58 | 3 | 38 | 2 | 20 | 1 | | | | | | | |
| ----- | | 101 | ----- | | 75 | ----- | | 56 | ----- | | 37 | ----- | | 18 | | | |
| 7 | 99 | 8 | 73 | 9 | 54 | 10 | 35 | 11 | 16 | 12 | | | | | | | |
| ----- | | 98 | ----- | | 96 | ----- | | 71 | ----- | | 53 | ----- | | 34 | ----- | | 14 |
| 18 | 94 | 17 | 69 | 16 | 51 | 15 | 32 | 14 | 12 | 13 | | | | | | | |
| ----- | | 92 | ----- | | 91 | ----- | | 68 | ----- | | 49 | ----- | | 31 | ----- | | 10 |
| 19 | 89 | 20 | 66 | 21 | 48 | 22 | 29 | 23 | 9 | 24 | | | | | | | |
| ----- | | 86 | ----- | | 85 | ----- | | 65 | ----- | | 46 | ----- | | 27 | ----- | | 7 |
| 30 | 84 | 29 | 63 | 28 | 44 | 27 | 25 | 26 | 5 | 25 | | | | | | | |
| ----- | | 82 | ----- | | 81 | ----- | | 62 | ----- | | 43 | ----- | | 24 | ----- | | 3 |
| 31 | 78 | 32 | 61 | 33 | 41 | 34 | 22 | 35 | 1 | 36 | | | | | | | |

Meanders of ----- Pages ----- to -----

Meanders of ----- Pages ----- to -----

pages 942 + 943
are blank

1032

Subdivision of T. 2 South R. 35 East
Willamette Meridian, Oregon.

West on a random line bet. Sec. 30 & 31
Ta. 23° 30' East

4.00 Dim wagon road bears NE & SW

15.00 Descend hill bears N & S

19.60 Dry gulch course North 300 ft.
below top of hill

And Ascend

21.50 Dry gulch course NE

24.75 Top of hill bears S. and NW 300 ft.
above dry gulch

40.00 Set temporary $\frac{1}{4}$ sec. cor.

79.70 Intersect W. boundary of the township
35-lks. North of the cor. to sec. 25, 36,

30 & 31, which is a Fir tree 18 ins. in
dia, marked T 2 S. S 30 on NE

R 35 E S 31 on SE

R 34 E S 36 on SW and S 25 on
NW. face, with 1 notch on S.
and 5 notches on W. edge,

from which

A fir 16 ins. in dia. bears S 60° E 13 lks. dist.
marked T 2 S R 35 E S 31 B 7

Subdivision of T. 2 South R. 35 East
Willamette Meridian, Oregon.

A fir 18 ins. in dia. bears $N 43^{\circ} E$ 42 lks. dist.
marked T 2 S R 35 E S 30 B J

A fir 20 ins. in dia. bears $N 44^{\circ} W$ 38 lks. dist.
marked T 2 S R 32 E S 25 B J

A pine 8 ins. in dia. bears $S 31^{\circ} E$ 35 lks. dist.
marked T 2 S R 35 E S 31 B J

Thena I run

$N 89^{\circ} 45' E$. on a true line bet. Secs. 30 & 31
Var. $18^{\circ} 50'$ East

39.70 Set a post 3 ft. long 3 ins. sq. 24 ins.
in ground for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$
Down W. face. from which

A tamarack 8 ins. in dia. bears $N 52^{\circ} W$ 8 lks.
dist. marked $\frac{1}{4}$ S. B. J.

A tamarack 9 ins. in dia. bears $S 77^{\circ} W$ 30 lks.
dist. marked $\frac{1}{4}$ S. B. J.

79.70 The cor. to secs. 29, 30, 31 & 32

Land high and mountainous
firs 2" & 3" tall

Heavily timbered with pine fir &
tamarack and some dense
undergrowth of spruce, fir &
tamarack.

1038

-88-

Subdivision of T. 2 South R. 35 East
Willamette Meridian, Oregon.

40.00 Set temporary $\frac{1}{4}$ sec. cor. 50 ft.
below sec. cor

50.00 Descend hill bears NW 7° SE

75.00 Branch 4 lks. wide course NW 2000 ft
below top of hill and ascend

79.74 Intersect W. boundary of the
township at the cor to sec 24, 25;

19 & 30, ^{20 ft above branch} which is a post 4 ins. sq

marked. T 2 S. S 19 on NE

R. 35 E S 30 on SE

R 34 E S 25 on SW and S 24

on NW. face, with 3 notches on base

4 notches on W. edge, from which

A fir 40 ins. in dia. bears S 79° E 44 lks.

dist. marked. T 2 S R 35 E S 30 B J

Atamarack 15 ins. in dia. bears N 40° E 58 lks.

dist. marked. T 2 S R 35 E S 19 B J

and mound of stone alongside

Thence I run

East on a true line bet. Sec 19 & 30

To $19^{\circ} 40'$ East

39.74 Set a post 3 ft. long 3 ins. sq. 24 ins

Subdivision of T. 2 South R. 35 East
Willamette Meridian, Oregon.

Gradual Descent

31.72 Indian trail bears NW & SE
38.90 Dry bed of creek in ravine course NW
1000 ft. wide 400 ft. below Sec. cor.
and ascends
46.00 Det temporary $\frac{1}{2}$ sec. cor. 50 ft. above
Ravine

79.76 Intersect W. boundary of the township
6200 ft. North of the corners. 13, 24,
18 & 19. 400 ft above $\frac{1}{2}$ sec. cor. which
is a Lava Stone 60 x 36 x 12 inches
above ground, marked with 3 notches
on W. & S. edges. from which

A tamarack 7 ins. in dia. bears N 85° E 1300 ft.
dist. marked T 2 S R 35 E S 18 B J

A tamarack 7 ins. in dia. bears N 35° W 2400 ft.
dist. marked T 2 S R 34 E S 13 B F

A tamarack 7 ins. in dia. bears S 66° W 1600 ft.
dist. marked T 2 S R 34 E S 24 B F

A tamarack 7 ins. in dia. bears S 39° E 3300 ft.
dist. marked T 2 S R 35 E S 19 B J

Then a drain

N 89° ^{33'} E on a true line bet. Secs. 18 & 19

1058

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by Rufus S. Moore, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field notes of the survey of the Subdivisional lines of Town 2 South Range 35 East of Willamette Meridian, Oregon, showing the respective capacities in which they acted :

- _____ , Compassman.
- James Guttridge , Chainman.
- John Guttridge , Chainman.
- _____ , Chainman.
- _____ , Chainman.
- Joe Parodi , Axeman.
- _____ , Axeman.
- _____ , Flagman.

FINAL OATHS OF ASSISTANTS

We hereby certify that we assisted Rufus S. Moore, U. S. Deputy Surveyor, in surveying all those parts or portions of the Subdivisional lines of Town 2 South of Range 35 East of Willamette Meridian, Oregon, as are represented in the foregoing field notes as having been surveyed by him and under his direction ; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- _____ , Compassman.
- James Guttridge , Chainman.
- John Guttridge , Chainman.
- _____ , Chainman.
- _____ , Chainman.
- Joe Parodi , Axeman.
- _____ , Axeman.
- _____ , Flagman.

Subscribed and sworn to before me, this Twenty First day of November 1882
 [SEAL.] Rufus S. Moore
 Notary Public

FINAL OATH OF DEPUTY SURVEYOR.

1957

I, Rufus S. Moore

United States Deputy Surveyor, do solemnly swear that in pursuance of in-

structions received from James C. Selman

U. S. Surveyor General for Oregon, bearing date of the Twelfth

day of June, 1882, I have well, faithfully and truly, in my own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor General for Oregon, the Surveying Manual, and the laws of the United States, surveying all those

parts or portions of the Subdivisional Lines of
Town 2 South Range 35 East of

Willamette Meridian, in the State of Oregon, as are represented in the foregoing Field Notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions, the special written instructions of the U. S. Surveyor General for Oregon, and in the specific manner described in the field notes, and that the foregoing are the true field notes of such survey, and should any fraud be detected I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.

Rufus S. Moore
U. S. Deputy Surveyor.

Subscribed and sworn to before me, this 10th
day of February 1883

Benford Robb
Notary Public

1058

Office U. S. Surveyor General,

Portland, Oregon, June 5 1883

The following Field Notes of the Survey of the

Subdivisional lines of
T2 South, R. 35 East
Will. Meridian, Oregon,
executed by Rufus S. Moore

under his Contract No. 451, dated June 12th

1882, having been critically examined, the
necessary corrections and explanations made, the said field notes
and the survey they describe, are hereby approved.

James C. Tolman
Surveyor General.