

Washington transcript, made L.A.M.

Field Notes of the Exterior
Lines of Townships No. 1 & 2 N.
Range No. 31. East of the Will-
amette Meridian, Oregon - ex-
ecuted by Josiah A. Burnett
deputy Surveyor, under his con-
tract No. 92, dated September
12th 1860.

Commenced October 16th 1860
Completed Nov. 20th 1860.

Rec^d Nov-19th 1860

Copia


+

Index Diagram

R. 31. E.

T. 2. N

T. 4. N

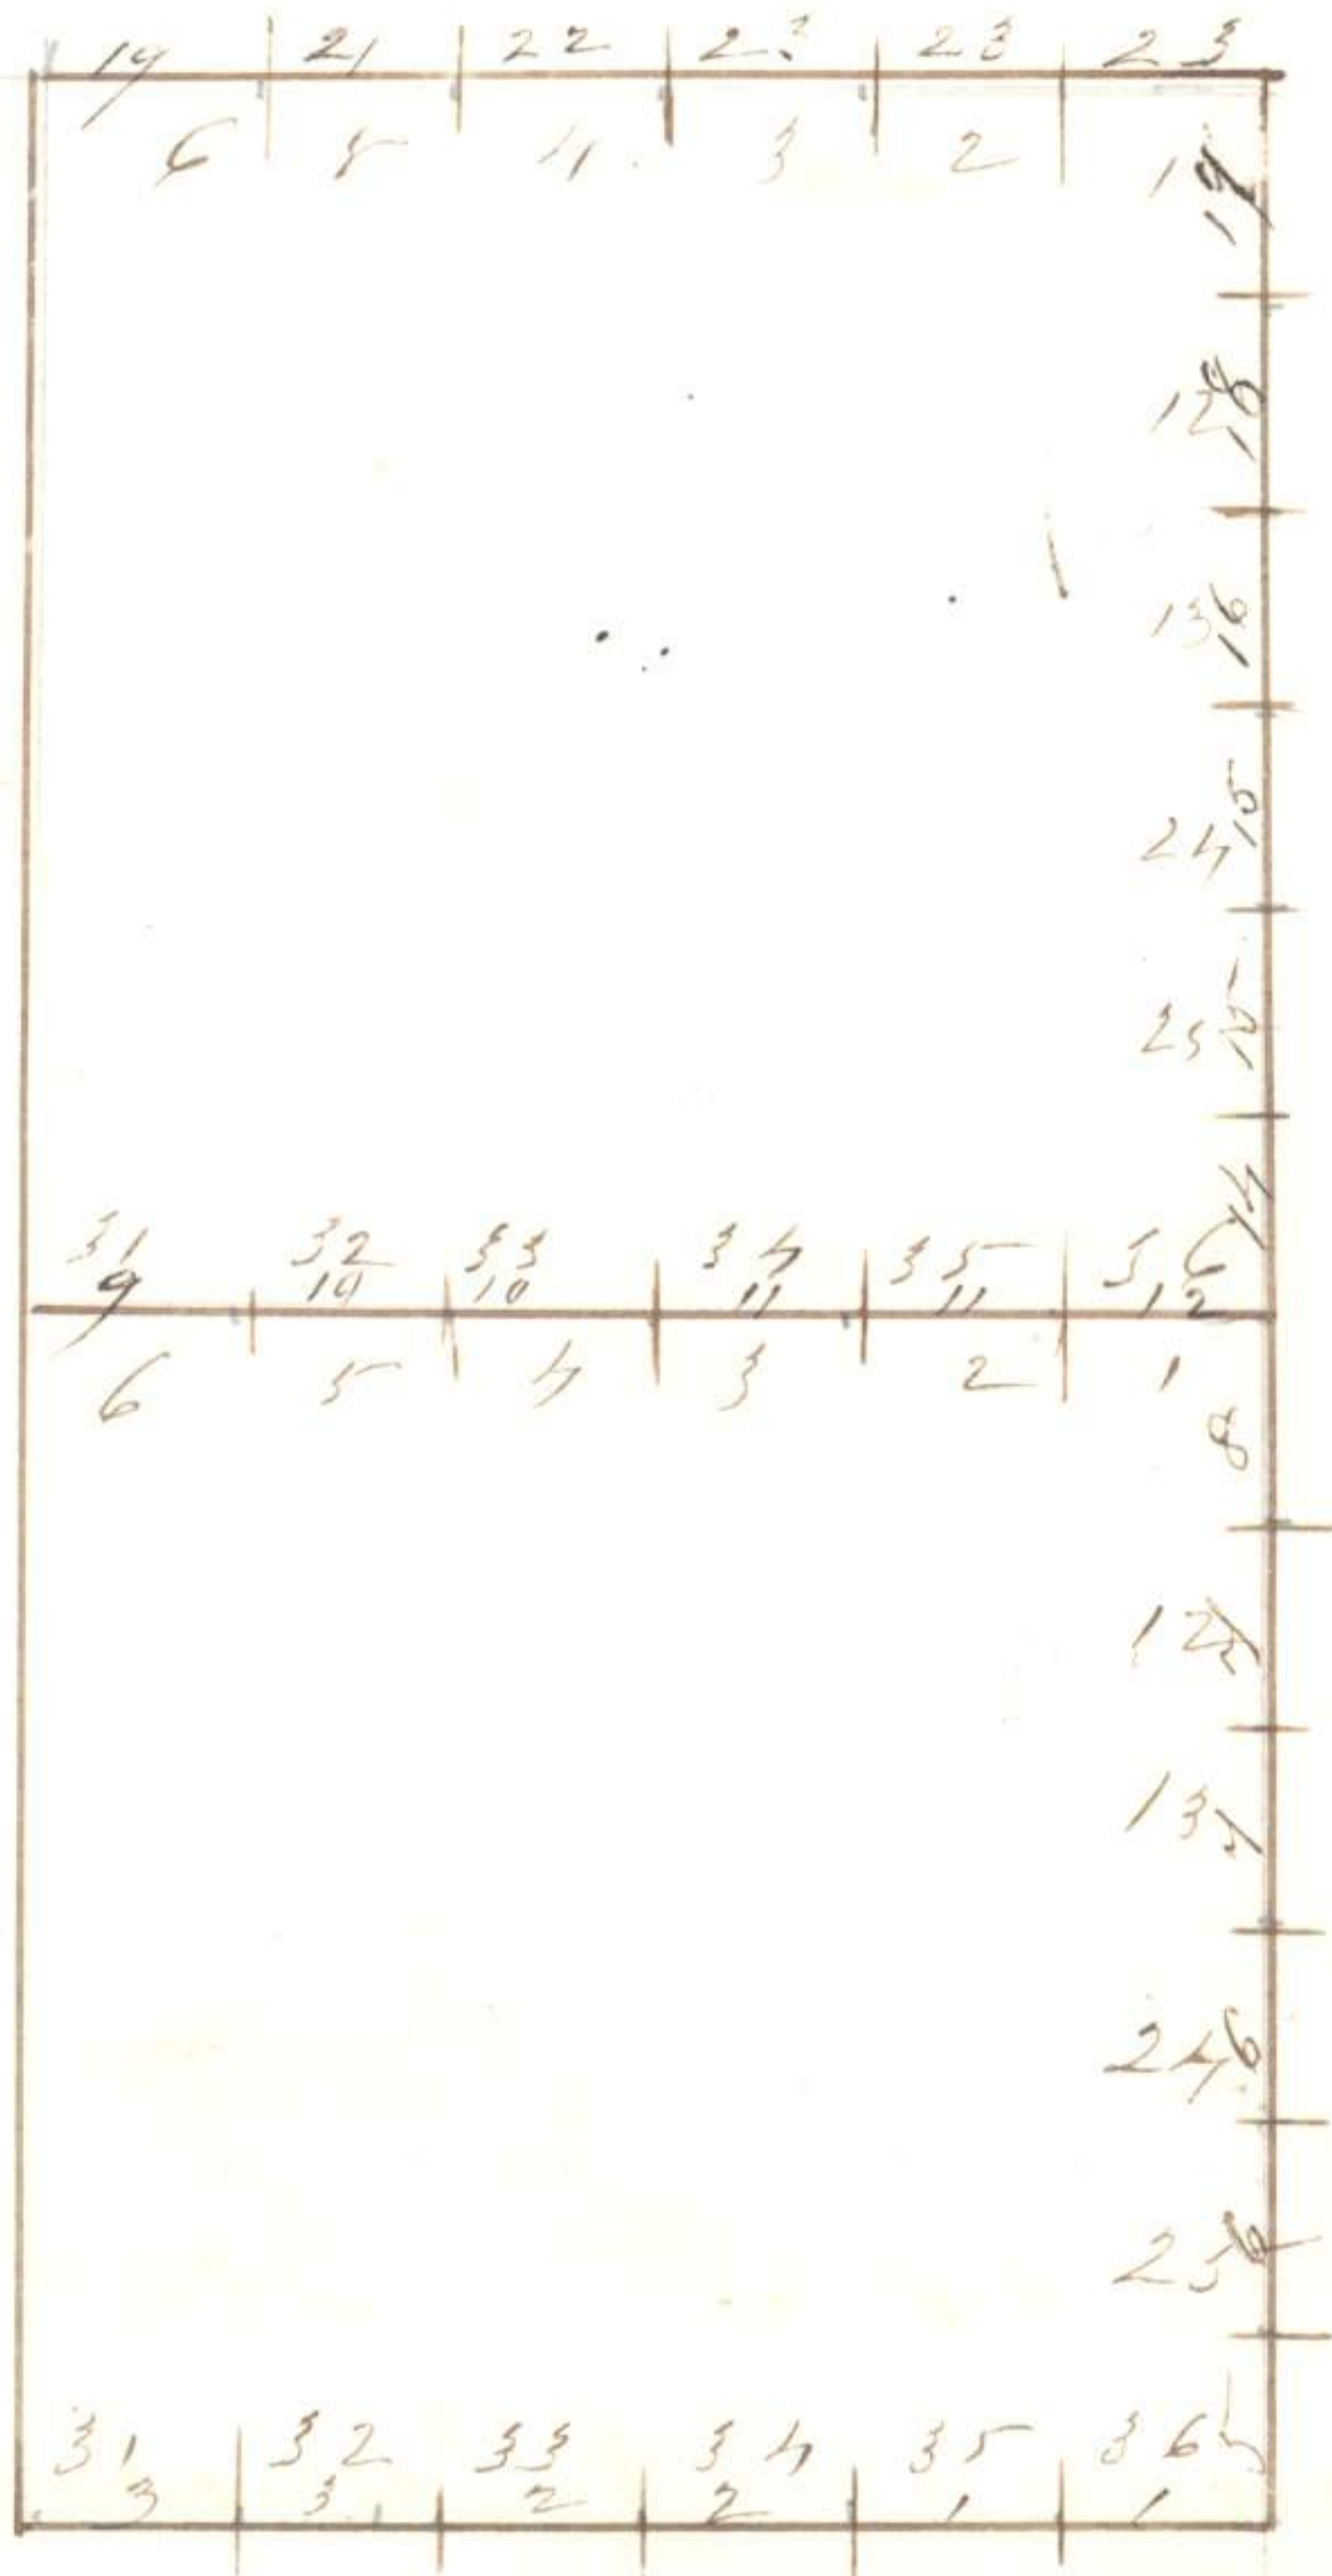

We Walter Poulding, Thomas H

Bell, Davis Divers & Patrick Call-
-ihan, do solemnly swear that we
will faithfully execute the duties
of chain carriers, that we will level
the chain upon uneven ground
and plumb the tally pins, whether
by sticking or dropping the same,
that we will report the true distance
to all notable objects, and the true
length, of all lines that we assist
in measuring to the best of our
skills and ability

Walter Poulding chainman
Thomas H Bell chainman

Daves, Divers chainman

Patrick ^{pin} Callihan chainman
marks

Subscribed & Sworn to before me by
the above named persons this
22^d day of September 1860
J. B. Hodgdon J. P.
of Masco Co Oregon

We Wm Smith & Thomas White do
solemnly swear that we will
well and truly perform the duties
of Axemen according to instruc-
-tions given, ~~us~~ and to the
best of ~~our~~ skill and ability
William L Smith Axeman
Thomas White Axeman
Subscribed & sworn to before me
by the above named persons
this 22^d day of September 1860
S. B. Hodgdon, J. P.,
of the Co of Marsoo Arizon

Return Range 31432 E T 2 N

North on the East boundary of
Sec. 1

Variation 20° 00' E

40.00 Set a post for 1/4 sec cor drove cha-
=rra stake and raised mound
with trench as per instructions

80.00 To a point for corner to Township
243 North. Range 31432 East
drove charra stake and raised
mound with trench as per int-
=ructions

Land rolling grass hills 2^d rate
soil.

Oct. 19th 1800.

West on a random line along
the ~~North~~ boundaries of Secs. ^{1, 2, 3,} ~~4, 5, 6,~~
~~7, 8, 9, 10~~

Variation 195° E

Set temporary half mile and mile
posts at every 40 and 80 chains and
at 6 miles 2 chains and 60 links To

North
~~South~~ boundary T. N. R. 31 E

a point 600 links south of the
 corner to Townships 24 3 North
 Ranges 30 31 East. Thence the
 connection will be

100 links south per
 mile.

I find the post & mound stan-
 -ding with true

Note. In closing this line on
 the meridian. I find it falls
 short of the measurement of the
 North boundary of T. N. R. 31 E
 4.65 chs. I therefore re-measure
 the North boundary of T. 2 N.
 R. 31 E. also retrace East bou-
 -ndary of same. and find it
 correct. The error is in the course
 of the ^{guide} meridian.

From the corner to Townships
 24 3 North Range 30 31 East I run
 S 89.17' E on a true line along the

North boundary T2 N R31 E

North boundary of Sec. 6

44.60 Set a Post for ~~1/4~~ ^{Varied to 1915 E} Sec. cor. drove charred stake and raised mound with trench as per instructions

84.60 Set post for corner to Sec's. 5. 631 and 32. drove charred stake and raised mound with trench as per instructions.

Land rolling Table lands 2^d rate soil

S89.17 E on true line along the ~~South~~ North boundary of Sec. 5.

Mar 1920 E

40.00 Set post for 1/4 Sec. cor. drove charred stake and raised mound with trench as per instructions.

80.00 Set a post for corner to Sec's. 4.5. 33433. drove charred stake and raised mound with trench as per instructions.

Land gully rolling prairie 2^d rate soil

North
~~South~~ boundary T2 N R31 E

589.17' E on a true line along the
North ~~South~~ boundary of Sec. 4.

Var 19.45' E

28.00 Wagon Road from Fort Dallis
to Fort Walla Walla. Course
N 75° W. + S 75° E

40.00 Set post for $\frac{1}{4}$ sec. cor. drove chand
stake, and ^{Raised} mound with trench
as per instructions.

80.00 Set a post for cor. to Sec's. 3, 4, 33

+ 34, drove chand stake and raised mound
with trench as per instructions.
Land gently rolling light 2^d rate
soil

589.17' E on a true line along the
North ~~South~~ boundary of Sec. 3,

Var 19.45' E

40.00 Set a post for $\frac{1}{4}$ sec. cor. drove
chand stake and raised mound
with trench as per instructions.

80.00 Set a post for corner to Sec's. 2, 3,
34 and 35. drove chand stake

North ~~South~~ boundary T. N. R. 31 E

and raised mound with truck
as per instructions.

Land, gutty rolling prairie 2^d
oats soil.

S 89° 17' E on true line along the ~~South~~
north boundary of Sec. ~~2~~ 2.

Variation 1945 E

40.00 Set post for 1/4 sec. cor. drove cha-
=rred stake and raised mound
with truck as per instructions

80.00 Set post for corner to Sec's. 1. 2.
35 and 36. Drove charred stake and
raised mound with truck as
per instructions.

Land rolling Prairie light 2^d
oats soil

S 89° 17' E on true line along the
north ~~South~~ boundary of Sec. ~~1~~ 1.

Var. 1945 E

35.25 A Wagon Road from Dalles to Walla

264

(24)

North
~~South~~ Boundary 2 N R 31 E

Walla course N. E. + S 76 W
4000 Set a post for cor to 1/4 sec drove
chance stake and raised monument
with trench as per instructions
8000 The corner to Townships
243 North Ranges 31 & 32 East
Level Prairie 2^d rate soil
Oct 20th 1860

General Description

This Township contains a large amount of first rate land for farming

The Imatillah river bottoms are well timbered with Balsam & Birch. Imatillah river runs through near the center of the Township, its bottoms is rich soil, and good for farming purposes.

The Township will admit of a large settlement and should therefore be subdivided.

A list of the names of the individuals employed to assist in running measuring or marking the lines and corners described in the foregoing field notes of Townships T¹⁰N and 2 North of the Base line of Range N³¹E east of the Willamette meridian showing the respective capacities in which they acted,

Patrick Callahan, Chairman

Walter Paulding " "

Thomas Whit's Eyeman

M. C. C. Murphy, Compassman

We hereby certify that we assisted Josiah, A. Burnett ²⁶⁷
deputy surveyor in surveying the exterior lines
of Township No 142 North of the base line of
Range No 31 East of the Willamette meridian

and the survey of the Base line along the
south boundary of Township No 1 North of
Range No 31 East of the Willamette meridian
and that said exterior and survey of the base
line has been in all respects to the best of our
knowledge and belief, well and faithfully sur-
veyed and the boundary monuments planted
according to the instructions furnished by
the surveyor General,

M. O. Murphy

Patrick ^{his} Ballahan

Walter Poulding

Thomas White Osaman

Subscribed & sworn to by the above persons before
me a Justice of the Peace, of the County of
Wasco, State of Oregon, this 30 day of October
1860—

G. B. Hodgdon
Justice of the Peace

I Josiah A. Burnett deputy
 Surveyor do solemnly swear
 that in pursuance of a contract
 with W. W. Chapman Surveyor
 of the public lands of the
 United States, in the State of Oregon
 bearing date the 12th day of Septem-
 -ber 1860, and in strict conformity
 to the laws of the United States,
 and the instructions furnished
 by the said Surveyor General, I have fai-
 -thfully surveyed the exterior boundaries
 of Townships No 1 and 2 North, of the base
 line of Range No 31 East of the Willamette
 Meridian in the State aforesaid and do further, sol-
 -emly swear that the foregoing are the true and
 original field notes of such survey

J. A. Burnett

Asst. Surveyor

Subscribed and sworn to before
 me at Eugene City Nov 21. 1860

W. W. Chapman Surveyor

270

Surveyor General's Office

Eugene City, Dec 5th 1860.

The foregoing field notes of the survey of the remeasurement of the Base Line through Range No 31 East and the Exterior Lines of Townships No. 1 & 2 North of Range No. 31 East of the Willamette Meridian, Oregon, executed by J. A. Barnett under his contract of the 12th day of September 1860. having been critically examined the necessary corrections and explanations made, the said field notes and the surveys they describe are hereby approved.

A. W. Chapman
Sur. Gen. of Oregon.