

I Charles D Hardisty do solemnly
 swear that I will faithfully execute
 the duties of chain carrier; that
 I will level the chain upon uneven
 ground and plumb the tally pins,
 whether by sticking or dropping the
 same; that I will report the true
 distance to all notable objects, and
 the true length of all lines that
 I assist in measuring, to the best
 of my skill and ability.

Charles D Hardisty

State of Oregon }
 County of Yamhill } ss. Subscribed
 and sworn to before me this
 2^d day of September 1886
 William Sewall
 Justice of the Peace

J S Co Hardisty do
Solemnly swear that I will well
and truly perform the duties of
Assessor according to instructions
given me and to the best of my
skill and ability.


J Co Hardisty

State of Oregon }
County of Umatilla } s.s. Subscribed
and sworn to before me this
21 day of September 1876
William Linnallen
Justice of the Peace

x

Index.

Subdivision lines of Town 3 N, Range 34 E.

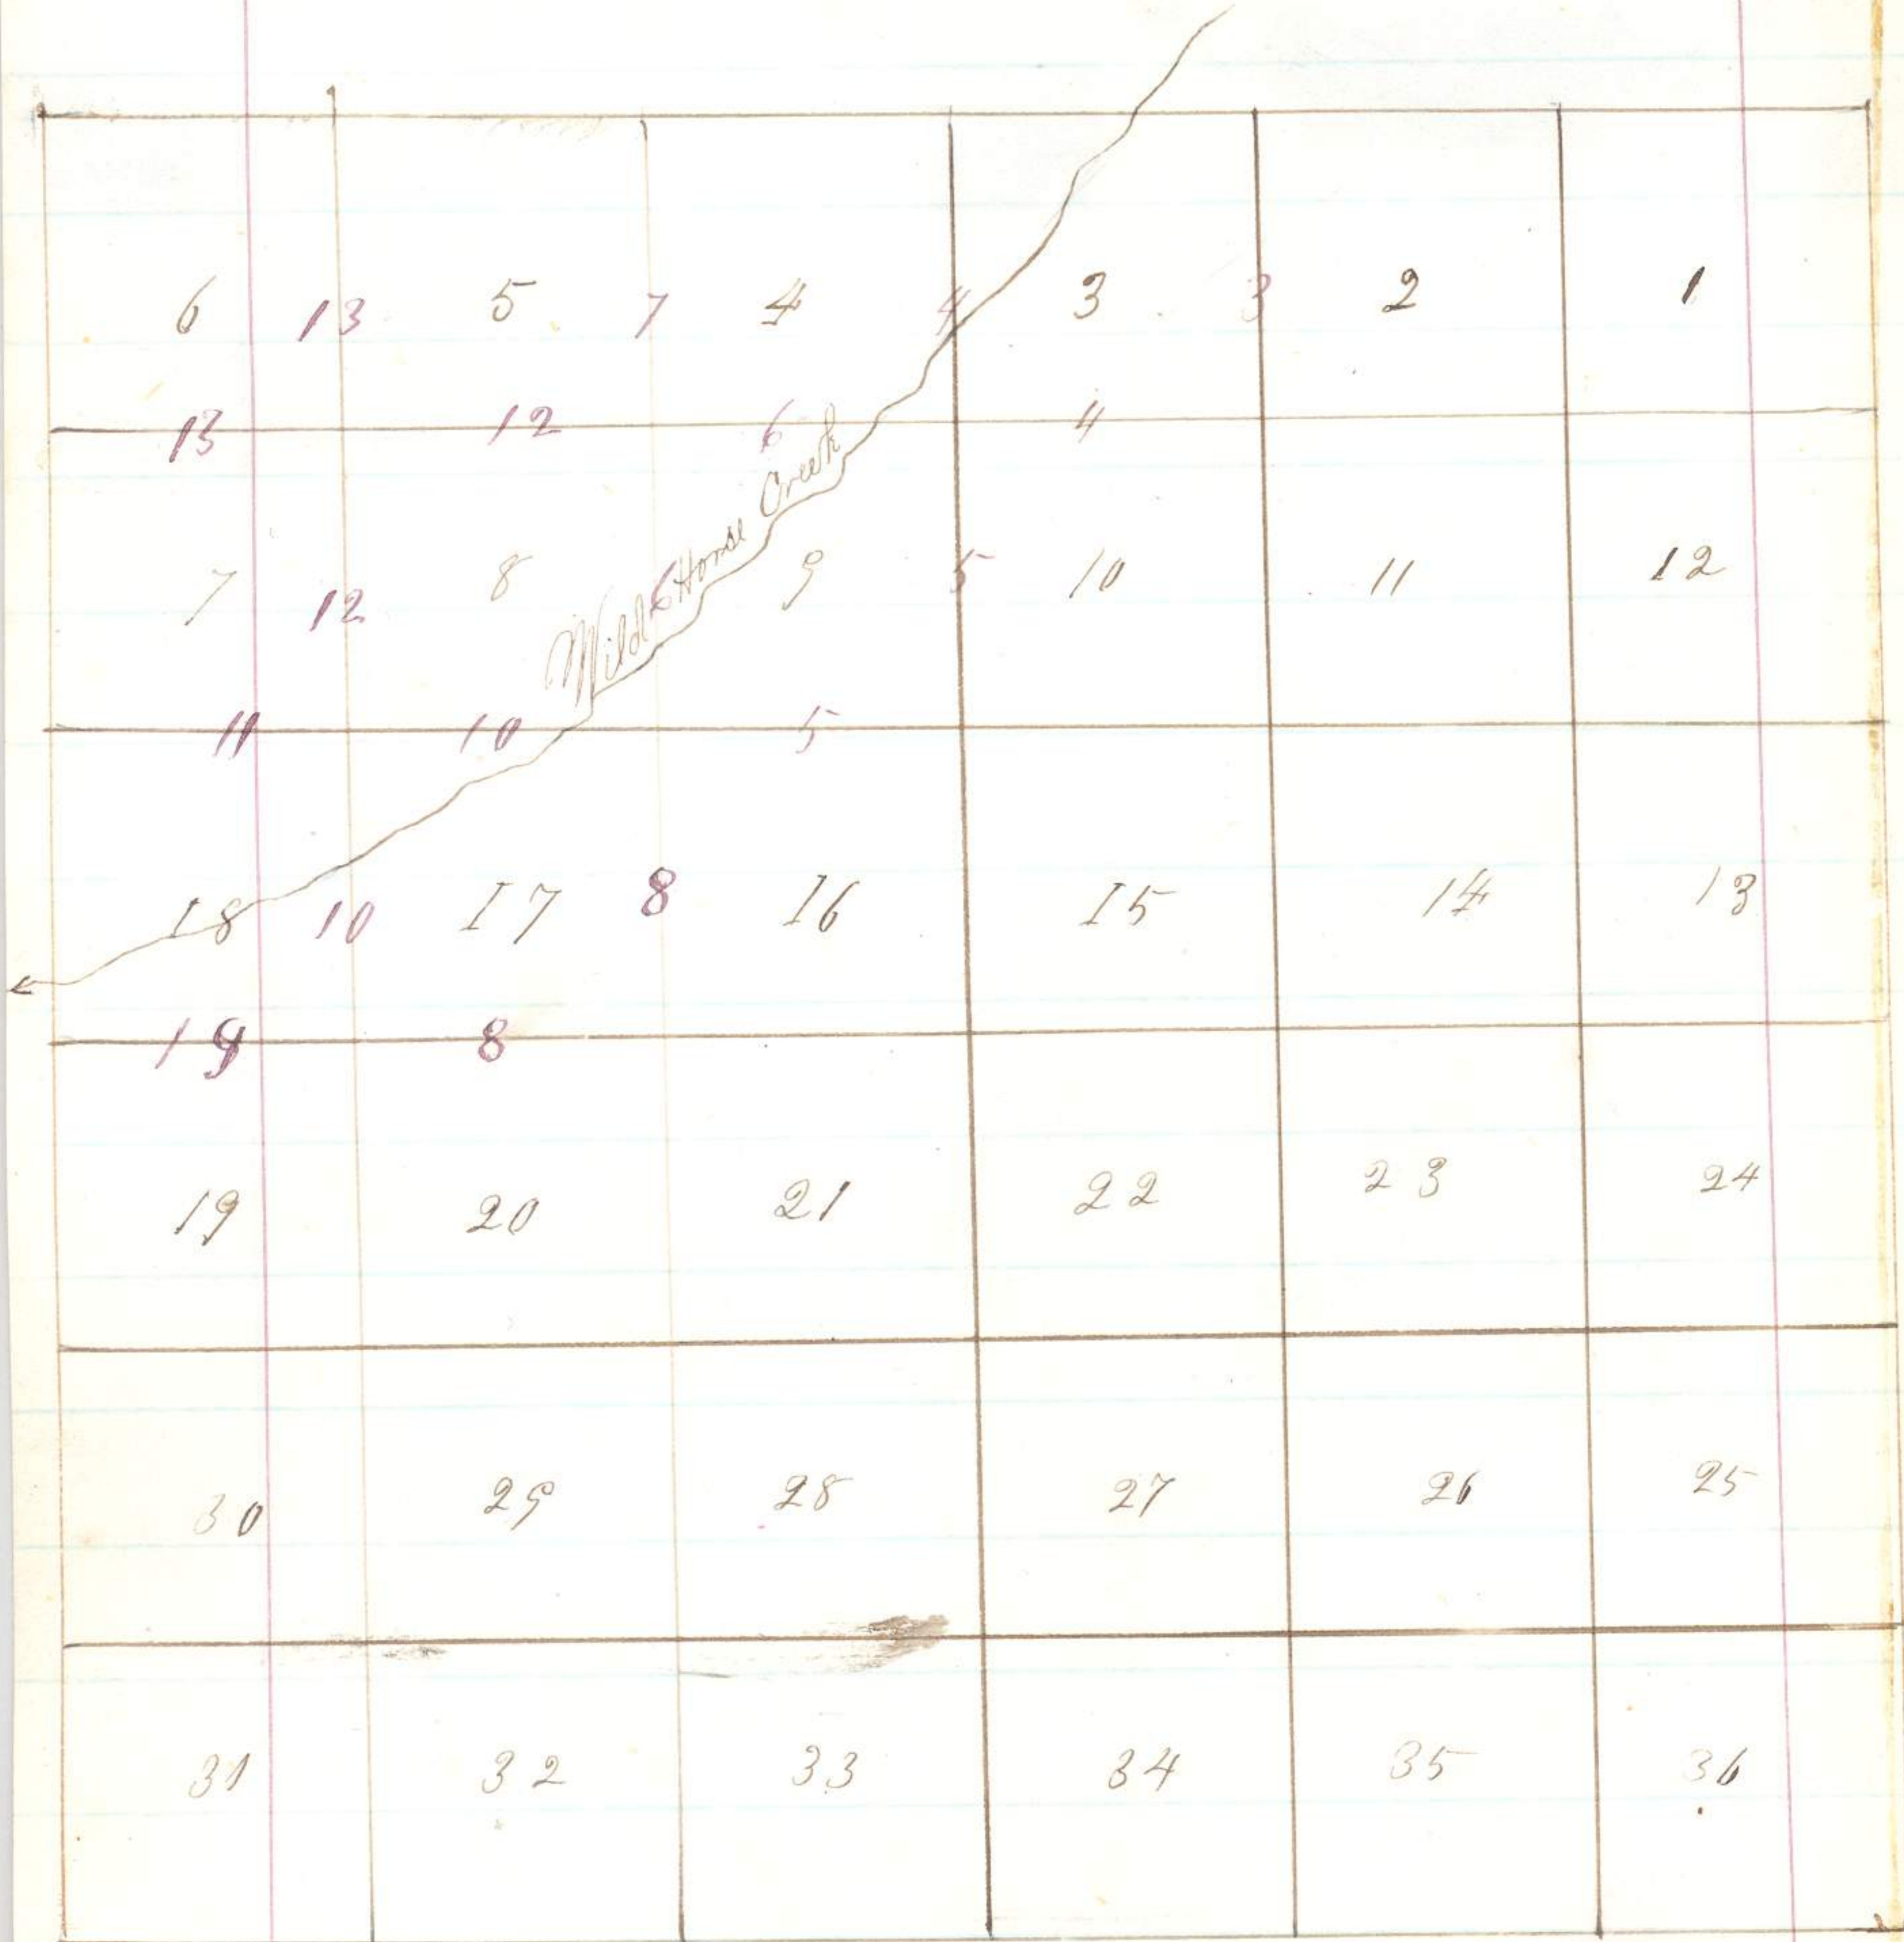

Field Notes of the
 Subdivision lines of Township
 number 3 North of the base line
 of Range 34 East of Willamette
 Meridian.

The greater part of this
 Township being on the Umatilla
 Indian Reservation, consequently
 not subject to surveys.

I commence at post
 corner for sections 2, 3, 34 & 35,
 on North boundary of Township
 Thence South between sections 2 & 3

4000
 4000 Set post corner for $\frac{1}{4}$ section
 drove charred stake dug pits
 and raised mound as per
 instructions

43.50
 43.50 Spring branch 3 links with course N.W.

50.00
 8000 Set post corner for sections 2, 3
 10 & 11. Drove charred stake,
 dug pits and raised mound.

4/9 304

Township 3 North, Range 34 East, Will. Mer,
as per instructions.

Land rolling good
Grass Soil 1st rate,

X

West between sections 3 & 10

Var 21° E -

40.00 Set post corner for 1/4 section
drove charred stake dug pits
and raised mound as per instructions

80.00 Set post corner for sections 3, 4, 9 & 10,
drove charred stake dug pits and raised
mound as per instructions.

Land gently rolling, good grass,
Soil 2^d rate,

X

North on random between sections 3 & 4.

Var 21° E.

40.00 Set temporary 1/4 section corner.

80.25 Intersected East and West line 6 links

West of post corner,

S 0° 34' 0" on true line

40.25 Set post corner for 1/4 section drove
Charred stake dug pits and raised

Cowhip 3 North, Range 34 East Will, Mer, 305-5

Mound as per instructions

4225 Wild Horse Creek 10 links wide course

S 38° W,

8025 To post corner,

+ Land gently rolling, good
grass, Soil 1st Rate,

South between sections 9 & 10

4000 Set post corner for 1/4 section, drove
charred stake dug pits and raised
mound as per instructions,

8000 Set post corner for sections 9, 10, 15 & 16

drove charred stake dug pits and
raised mound as per instructions

X Land gently rolling, good
grass Soil 1st Rate,

West between sections 9 & 10

Bar 21° East

4000 Set post corner for 1/4 section, drove 15-
charred stake dug pits and raised
mound as per instructions

+

Township 3 North, Range 34 East, Will, Mo.

80.00 Set post corner for sections 8, 9, 16 & 17

above charred stake dug pits and raised mound as per instructions

Land gently rolling, good

grass soil 2^d rate,

X

North between sections 8 & 9.

Bar 21st East

19.85 Wild Horse Creek 10th wide course S.W.

40.00 Set post corner for 14 section

above charred stake, dug pits, and raised mound as per instructions

80.00 Set post corner for sections 4, 5,

8 & 9. above charred stake dug pits and raised mound as per instructions,

Land gently rolling good

grass soil 1st rate,

X

East on ranchon between sections

307 7

Township 3 North, Range 34 East, Will. Mer,

449

Bar 21° East

^{40.00}
40.00 Set temporary 1/4 Section post
corner,

^{79.85}
79.85 Intersected North and south line
30 links North of post corner

N 89° 47' W on true line

^{17.25}
17.25 Wild Horse Creek 10 links wide course S.W.

^{39.92}
39.92 Set post corner 1/4 section, brook charred
stake dug pits and raised ground as
per instructions.

^{79.85}
79.85 To post corner

Land gently rolling good grass

X Soil good 2^d rate,

North on random between sections 445,

^{40.00}
40.00 Set temporary 1/4 section post corner

^{79.81}
79.81 Intersected East and West line 40
links West of post corner,

S 0° 17' East on true line

39.81 Set post corner for 1/4 section,
brook charred stake dug pits and

487 308

Township 3 North, Range 34 East Will. Mer-

raised mound as per instructions

79.81 To post corner.

Land rolling good grass
soil good 2nd rate.

X

North between sections 16 & 17.

37.51 Boise City and Amatilla Stake Road
course West.

40.00 Set post corner for 1/4 section, drove
charred stake dug pits and raised
mound as per instructions

80.00 Set post corner for sections 16.17. 20 & 21.

drove charred stake, dug pits and raised
mound as per instructions.

Land gently rolling, good
grass soil good 2nd rate,

August 31st 1866.

X

West between sections 17 & 20

bar 20° 30' East.

40.00 Set post corner for 1/4 sections, drove
charred stake dug pits and raised

Township 3 North, Range 34 East, Will, Mer-
mound as per instructions.

80.00 Set post corner for sections 17, 18, 19 & 20
drove charred stake, dug pits, and
raised mound as per instructions
Sand rolling, good grass,
Soil good 2nd rate,

X

Nest on random between sections
18 & 19.

Bar 20° 30' East -

40.00 Set temporary 1/4 Section post corner

80.00 Could not find corner on Town line
for sections 13, 24, 18 & 19, no stake or
mound visible near the place where
the line ought to be, consequently
set post drove charred stake
dug pits and raised mound as
per instructions,

East on true line

40.00 Set post corner for 1/4 section drove
charred stake dug pits and raised
mound as per instructions.

40 310

Township 3 North, Range 34 East, Will, Mer,

80.00 To post corner,

X Land gently rolling good
grass, soil good 2^d rate,

North between sections 17 & 18,

39.75 Boise City and Armatilla State
Roads, course East & West,

40.00 Set post corner for $\frac{1}{4}$ section corner
drove charred stake, dug pits and
raised mound as per instructions

47.40 Wild Horse Crank 10 links wide course S. W. 25 25

80.00 Set post corner for sections 7. 8. 17 & 18. 30 30

drove charred stake dug pits and
raised mound as per instructions

Land broken, grass good

Soil good 2^d rate,

+

East on random between sections 8 & 17

Bar 21° East,

40.00 Set temporary $\frac{1}{4}$ section corner,

79.89 Intersected North and South
line 41 links south of post corner

311 11

Township 3 North Range 34 East Will, Mer.

S 89° 42' W on true line

25.10 Wild Horse Creek 10 links wide course S, W, 75

39.94 Set post corner for ~~1/4~~ section drove
charred stake dug pit, and raised
mound as per instructions,

79.89 To post corner,
Land rolling, grass good
X Soil good 2^d rate,

West on random between sections

7 & 18,

40.00 Set temporary 1/4 section corner

80.12 Intersected North and South line
15 links South of post corner,

N 89° 54' East on true line,

40.12 Set post corner for 1/4 section, drove
charred stake dug pit and raised
mound as per instructions

50.12 To post corner,
Land rolling, grass good,

X Soil 2^d rate,

127 312

Township 3 North Range 34 East Will, Mer

North between sections 7 & 8.

40.00 Set post corner for 1/4 section, drove
churched stake dug pits, and raised
mound as per instructions

80.00 Set post corner for sections 5, 6, 7 & 8
Drove churched stake dug pits and
raised mound as per instructions.

Land rolling, good grass
soil good 2^d rate,

X

East on random between sections
5, 7 & 8.

Bar 21° E

40.00 Set temporary 1/4 section corner

79.76 Intersected North and South line
57 links South of post corner
S 89° 36' W on true line.

89.88 Set post corner for 1/4 section, drove churched
stake dug pits and raised mound as
per instructions,

79.76 To post corner

Land rolling, Soil 2^d rate,

X

4 Township 3 North, Range 34 East, Will, Mer 313 13

West between sections 5 & 7, random

4000 Set temporary $\frac{1}{4}$ section corner

80,23 ^{80,23} Intersected North and south line

27 links South of post corner

S $89^{\circ} 48'$ East on true line,

40,23 ^{40,23} Set post corner for $\frac{1}{4}$ section, drove

churned stake dug pits and raised

mound as per instructions

80,23 ^{80,23} To post corner,

x Land rolling good grass soil 2 $\frac{1}{2}$ rate

North between sections 5 & 6 on random

4000 ^{40,00} Set post temporary corner for $\frac{1}{4}$ section

80,30 ^{80,30} Intersected East and West line,

59 links East of Post Corner

S $00^{\circ} 25'$ E on true line

40,30 ^{40,30} Set post corner for $\frac{1}{4}$ section drove

churned stake dug pits and raised

mound as per instructions,

80,30 To post corner

x Land rolling soil 2 $\frac{1}{2}$ rate,

The lands in this Township are

well adapted to stock raising
being well watered and affording
an abundance of excellent grass.

The small bottoms along the
stream marking the northern
boundary of the Indian Reservation
are very rich and productive.

There are two or three settlers in
this Township and were it
not for the aforementioned
Reservation there would have
been quite a settlement,

August 31st 1864.

A List of the names of the individuals employed to assist in running measuring or marking the lines or corners described in the foregoing field notes of the subdivisions of Township No 3 North of the base Line of Range 34 East of Willamette Meridian, showing the respective Capacities of each in which they acted;

J. J. Henderson }
 John A. Riggs } Chairman
 P. M. Denney } Axeman

We hereby certify that we assisted
 William H. Odell, deputy surveyor,
 in surveying the subdivisioral lines
 of Township No 3 North of the base
 line of Range 34 East of Willamette
 meridian and that said Township
 has been in all respects, to the best of
 our knowledge and belief, well and
 faithfully surveyed and the boundary
 monuments planted according to
 the instructions furnished by the
 Surveyor General,

J J Henderson	Chairman
J A Trigg	Chairman
J A Denney	Member

State of Oregon }
 County of Washtilla } ss. Subscribed
 and sworn to before me this
 22 day of September 1866.
 William L. Waller Justice
 of the Peace

I William H. Cull, Deputy Surveyor,
do solemnly swear that, in pursuance
of contract with E. S. Applegate
Surveyor of the public lands of the
United States in the State of Oregon,
bearing date July 2^d 1866, and
strict conformity with the laws of
the United States and the instructions
furnished by said Surveyor General
I have faithfully surveyed the
~~existing~~ Subdivision lines of
Township No 3 North of Range 34 East
of Willamette Meridian in the State
aforesaid, and do further solemnly
swear that the foregoing are the
true and original field notes of such
survey.

William H. Cull

X

State of Oregon }
County of Lane } ss Subscribed and

Sworn to before me this 5th

day of January 1867.

Joel Ware
Notary Public

Surveyor General's Office

Cuzco July 15th 1867

The foregoing field notes of
the survey of the subdivisions
of Township No 3 North
Range 34 East Mer 20
executed by Wm H Odell
under contract No 114 dated
July 20th 1866 having
been critically examined.
The necessary explanations
and corrections made
the said field notes and
the surveys they describe
are hereby approved

E. L. Applegate
Sur Genl of Ore

x