

## FIELD NOTES

Of the survey of the Exterior L

Lines of T<sup>s</sup>. 2 N. R<sup>s</sup>. 32 & 33 E., T<sup>s</sup>. 4 N. R<sup>s</sup>. 34 & 35

E. & T<sup>s</sup>. 3 N. R<sup>s</sup>. 33. 34. 35 & 36 E., Willamette Meridian, Oregon,

as surveyed by Jas. P. Currier & Jas. E. Nolan

U. S. Deputy Surveyors, under <sup>their</sup> his Contract No. Special

dated May 4<sup>th</sup>, 1887.

Survey commenced, July 27<sup>th</sup>, 1887.

Survey completed, Sept 10<sup>th</sup>, 1887.

## NAMES AND DUTIES OF ASSISTANTS.

L. J. Wooley, Compassman.

Frank Belshaw, Chainman.

Guy Davis, Chainman.

W. H. Medley, Chainman.

J. S. Medley, Chainman.

Barney Coomer, Axman.

J. R. Gadley, Axman.

, Flagman.

PRELIMINARY OATHS OF ASSISTANTS.

We, J. S. Medley, W. H. Medley, Frank Belshaw & Guy Davis

do solemnly swear that we will faithfully execute the duties of Chain Carriers; that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in the survey

of the Exterior Lines of T. 2 N. R. 32 & 33 E. T. 4 N. R. 34 & 35 E. lines of T. 3 N. R. 33. 34. 35 & 36 East. Willamette Meridian, Oregon.

J. S. Medley, Chainman.
W. H. Medley, Chainman.
Frank Belshaw, Chainman.
Guy Davis, Chainman.

Subscribed and sworn to before me this 14th day of June, 1887



James P. Currin, U.S. Deputy Surveyor.


We, B. B. Cronner and H. Beach

do solemnly swear that we will well and truly perform the duties of Axmen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the

Exterior Lines of T. 2 N. R. 32 & 33 E. T. 4 N. R. 34 & 35 E. T. 3 N. R. 33. 34. 35 & 36 E. Willamette Meridian, Oregon.

B. B. Cronner, Axman.
H. Beach, Axman.

Subscribed and sworn to before me this 14th day of June, 1887

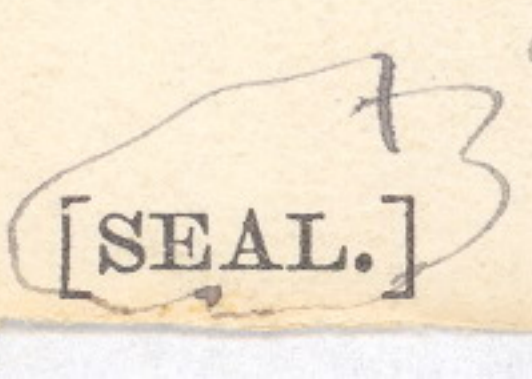

James P. Currin, U.S. Deputy Surveyor.

Exposures of T. 4 North R. 34 East

Willamette Meridian, Oregon.

South on E. body Dec 30  
Var. 190 45' E

12.45 Leave field

24.25 \* Wagon Road Course N.W. 1/4 E.

40.00 Deposited a charred stake 12 ins  
in the ground for 1/4 Sec Cor dug pits  
18x18x12 ins N. 1/4 of Cor 5 1/2 ft dist  
and raised a mound of earth 1 1/2 ft  
high. 3 1/2 ft base over it, in N Pit  
drove a stake 2 ft long 2 ins sq 12 ins  
in the ground, marked <sup>S on</sup> 1/4 N. face

49.00 \* Road Course N. 1/4

80.00 Set a post 5 1/4 x 4 x 4 ins 12 ins in the  
ground for Cor to, Tps. 3 + 4 N. R 34  
+ 35. East marked, D. 4 N. R 34 E,  
D. 36, on N.W. R 35 E, D. 31, on N.E. T.  
3 N. D. 6, on S.E. Dec. 1, on S.W. with  
6 notches on each edge, dug pits  
24x18x12 ins long thurs'e on each line  
N. S. E. W. of post 6 ft dist & raised a  
mound of earth 2 1/2 ft high. 5 ft base  
around post Land level. Soil 1st rate  
Some grass.

49  
2

561  
Exteriors

of T. 4 North R. 35 E

Willamette Meridian, Oregon.

(8093-10 M.)

East on random but  $\Delta$ ps 3+4 N. R. 35 E

Var  $19^{\circ} 30' E$

I set temporary half mile & mile Cors  
at each 40 & 80 chs, and at 2 miles  
and 47.20 chs intersect E line. 210 chs  
South of Cor to Secs 3+4, T. 4 N. R. 35 E,  
Thence I run S.  $89^{\circ} 30' W$  on true line  
but Secs 4+33.

Var.  $20^{\circ} E$

70,70 Intersect RR. bed and Wild Horse  
Creek, Set a post,  $48 \times 4 \times 4$  ins  $12$  ins  
in the ground for Closing Cor to Secs  
4+33, marked WR. 66, on W. face  
from which an alder 8 ins diam bears  
S.  $70^{\circ} W$ , dist 20 links marked UR, 66,  
B.T., a willow 10 ins diam bears at  $75^{\circ}$   
W dist 62 links, marked WR, 66, B.T.

80,00 Set a post  $48 \times 4 \times 4$  ins  $12$  ins in the  
ground for Cor to Secs 4, 5, 32, 33  
marked, T. 4 N. S. 33, on N. E. R. 35, E. S. 4

Enteries of T. 4 North R. 35 East

Willamette Meridian, Oregon.

2000\* Deposited charred stake 12  
 ins in the ground for  $\frac{1}{16}$  Sec.  
 corner dug pits 18 x 18 x 12 ins  
 E & W. of corner 5  $\frac{1}{2}$  ft. dist. and  
 raised a mound of earth 1  $\frac{1}{2}$  ft  
 high 3  $\frac{1}{2}$  ft base over it.  
 In E. pit drove a stake 2 ins  
 square 2 ft. long 12 ins in the  
 ground marked  $\frac{1}{16}$  S on N face

6000\* Deposited charred stake 12 ins  
 in the ground for  $\frac{1}{16}$  Sec. cor  
 dug pits 18 x 18 x 12 ins E & W.  
 of cor. 5  $\frac{1}{2}$  ft dist and raised  
 a mound of earth 1  $\frac{1}{2}$  ft high  
 3  $\frac{1}{2}$  ft. base over it  
 In E. pit. drove a stake  
 2 ft. long 2 ins square 12 ins  
 in ground marked  $\frac{1}{16}$  S on  
 N face

Exterior of T. 4 North R. 35 East  
Willamette Meridian, Oregon.

On S.E. of 3, 4, 5 on S.W., S 32 on N.W.  
with 4 notches on E, + 2 notches on W  
Edges, dug pits 18x18x12 ins. in each  
See 5 1/2 ft dist raised a mound of  
earth 2 ft high 4 1/2 ft base around post  
Land level

Soil 1st rate

Some Grass

South 89° 30' W. on true line bet sees.

5132,

Var. 20° E.

2000

\*

4000

Set a post 36x3x3 ins, 12 ins in the  
ground for 1/4 Dec Cor, marked 1/4 S. on  
N face. Dug pits 18x18x12. E.W. of  
Cor 5 1/2 ft dist + raised a mound of

60,000

Earth 1 1/2 ft high 3 1/2 ft base around post

8000

Set a post 48x4x4 ins, 12 ins in the ground  
for Cor to sees 5, 6, 31 + 32, marked, 2, 4 ft.

S. 32. on N.E. R. 35 E. S. 4 on S.E. 2, 3 ft. S 6. on S.W.  
S. 31. on N.W. with 5 notches on E, + 1 notch on  
W Edges, dug pits 18x18x12 ins in each see

Exteriors of T. 4 North R. 35 East  
Willamette Meridian, Oregon.

(8093-10 M.)

5 1/2 ft dist, raised a mound of earth 2 ft high 2 1/2 ft base around post  
Land level

Soil 1st rate Some Grass

South 89° 30' W on true line bet sees 6 & 31  
Var 21° E

8.00

Wagon Road Course N. 1/2 S.

11.50

" " " " " N. W. 1/2 E.

30.00

Touch wagon road

40.00

Set a post 36 x 3 x 3 ins 12 ins in the ground for 1/4 Sec. Cor marked 1/4 on N face, Dig pits 18 x 18 x 12 ins E & W. of Cor 5 1/2 ft dist raised mound of earth

1 1/2 ft high 3 1/2 ft base around post

61.50

Wagon Road Course N. E.

72.00

Wagon Road Course N. 1/2 S.

77.20

To Cor to Tps 374, N. R. 34, East

Land level } General Description  
Soil 1st rate } The land in this Township is  
Good Grass } generally rolling soil 2nd  
Rate. Good grass

566

Centering of T. 4 North R. 35 East  
Willamette Meridian, Oregon.

\*  
 20.00 Deposited charred stake 12  
 ins in the ground for  $\frac{1}{16}$  Sec  
 corner dug pits 18 + 18 + 12 ins  
 E & W of corner  $5\frac{1}{2}$  ft. dirt and  
 raised a mound of earth  $1\frac{1}{2}$  ft  
 high  $3\frac{1}{2}$  ft base over it.  
 In E. pit drove a stake 2 ft  
 long 2 ins square 12 ins in  
 the ground marked  $\frac{1}{16}$  Sec  
 N face

\*  
 60.00 Deposited charred stake 12 ins  
 in the ground for  $\frac{1}{16}$  Sec cor.  
 dug pits 18 + 18 + 12 ins E & W  
 of corner  $5\frac{1}{2}$  ft. dirt and raised  
 a mound of earth  $1\frac{1}{2}$  ft high  
 $3\frac{1}{2}$  ft base over it.  
 In E. pit drove a stake  
 2 ft long 2 ins square 12 ins  
 in the ground marked  $\frac{1}{16}$  Sec  
 N. face.



FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by Gas. P. Currier & Gas. E. Poland, U. S. Deputy Surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of the Exterior lines of T. 2 N. R. 32 & 33 E. lines of T. 4 N. R. 34 & 35 E. & T. 3 N. R. 33, 34, 35 & 36 E. Willamette Meridian, Oregon, showing the respective capacities in which they acted:

- L. J. Woolley, Compassman.
- Frank Belshaw, Chainman.
- Guy Davis, Chainman.
- H. J. Medley, Chainman.
- J. S. Medley, Chainman.
- Barny Crommer, Axman.
- J. R. Hadley, Axman.
- \_\_\_\_\_, Flagman.

FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted Gas. P. Currier & Gas. E. Poland, U. S. Deputy Surveyor, in surveying all those parts or portions of the Exterior lines of T. 2 N. R. 32 & 33 E. T. 4 N. R. 34 & 35 E. & T. 3 N. R. 33, 34, 35 & 36 E. Willamette Meridian, Oregon, as represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- L. J. Woolley, Compassman.
- J. S. Medley, Chainman.
- H. J. Medley, Chainman.
- Frank Belshaw, Chainman.
- Guy Davis, Chainman.
- B. B. Crommer, Axman.
- J. R. Hadley, Axman.
- \_\_\_\_\_, Flagman.

Subscribed and sworn to before me this 30<sup>th</sup> day of

Sept, 1887

[SEAL.]

James P. Currier  
U. S. Surveyor

## FINAL OATH OF DEPUTY SURVEYOR.

I, James P. Leurrin & James E. Roland, United States  
 Deputy Surveyor, do solemnly swear that in pursuance of instructions  
 received from Douglas H. Taylor, U. S.  
 Surveyor General for Oregon, bearing date of the 13<sup>th</sup>  
 day of May, 1887<sup>vol</sup>, I have well, faithfully,  
 and truly, in my own proper person, and in strict conformity with the  
 instructions furnished by the U. S. Surveyor General for Oregon, the  
 Surveying Manual, and the laws of the United States, surveying all  
 those parts or portions of the Exterior Lines of T. 2 N. R. 32 & 33

& T. 4 N. R. 34 & 35 E. & T. 3 N. R. 33, 34, 35 & 36 E.

Willamette Meridian, in the State of Oregon, as are represented in the  
 foregoing field notes as having been surveyed by me and under my  
 directions; and I do further solemnly swear that all the corners of said  
 survey have been established and perpetuated in strict accordance with  
 the Surveying Manual, printed instructions, the special written instruc-  
 tions of the U. S. Surveyor General for Oregon, and in the specific man-  
 ner described in the field notes, and that the foregoing are the *true* field  
 notes of such survey, and should any fraud be detected I will suffer the  
 penalty of perjury under the provisions of an act of Congress approved  
 August 8, 1846.

James P. Leurrin James E. Roland  
 U. S. Deputy Surveyor.

Subscribed and sworn to before me this Fifteenth  
 day of February, 1888

Alfred Woodcock  
 Notary Public  
 for Oregon

## Office of U. S. Surveyor General,

Portland, Oregon, June 19<sup>th</sup>, 1888.The <sup>foregoing</sup> following Field Notes of the Survey of the

Interior lines of T. 2 N Rqs

32 + 33 E. T. 4 N Rqs 34 + 35. E

and T. 3 N. Rqs 33 34 35 + 36 East

Will May Or.

executed by James J. Currier and James E. Nolan

Special Joint U. S. Dept. Surveyors-  
under his Contract No. \_\_\_\_\_, dated May4<sup>th</sup>, 1887, having been critically examined,  
the necessary corrections and explanations made, the  
said Field Notes and the survey they describe, are  
hereby approved.

Douglas W. Taylor

Surveyor General.