

Index

T. N. R. 35 E.

The following
 notes unapproved -
 by later survey
 See Book 175
 by J. N. R.

1 37

12 38

13 39

24 40

25 41

36 42

31	32	33	34	35	36
43	45	46	47	47	48

Suspended

In error, unapproved - to be
 re-surveyed - Ware

Township 4 N Range 35 East, Will, Mex,
South between section

21 & 36 Townships 4 N Ranges
25 & 36 East,

Variations 19° E —

4,000 Set 1/4 Section front corner, 30
on hill side facing the East,
from which a pine
36 in, dia, bears N 58° E, 74 lbs,
~~no~~ other tree near
Dry pits and raised
ground as per instructions

6,390 Pine Creek 20 lbs wide, course
N W 50

8,000 Set a post corner for ~~xxx~~ 50
Townships 3 & 4 North of Base
Line of Ranges 25 & 36 East
of Willamette Meridian, and
for sections 1, 6, 31 & 36,
from which

A Pine 42 in, dia, bears N 54° W, 18 lbs
do do 20 do do do N 27° E, 116 do
do do 15 do do do S 1° E, 50 do

Township 4 N Range 35 East Will, Mex,
 A Pine 20 in dia, bears South 37° W 68 lbs,
 This line passes down a
 Ravine to Pine Creek,
 Some scattering pines in Ravine
 and Timber to the South
 of Pine Creek,

start ~~X~~ X

Opp
 West on Random between
 Townships 37 4 North
 Range 35 East and South
 at 4000 and 8000 chs
 set mile and half Mill
 post, at 483.00 Interest
 N, 93, Line 15.0 chs
 South of post corner
 for Townships 37 N Ranges
 34 & 35 E, Hence the correction
 will be S 89° 45' East on true
 Line,

June 9th 1865

S 89° 45' E on true Line

474

570

Township 4 N Range 35 East Will, Mo,
 between the boundary of section

31

31 S, 4 N, R, 35 E,

Variation 21° East

4300

Set 4 section post, on level,
 Drove Churned Stake dug
 pits and raised mound
 as per instructions.

8000

Set a post corner for
 sections 576, 31 & 32, on
 level, Drove Churned
 Stake dug pits and
 raised mound as per
 instructions.

Land getting rolling
 Grass good Soil
 good 2nd water

South between sections

Township 4 N R 35 East Will, Mex,

S 89° 49' East on true line on
South boundary of section

32 Township 4 N R 35 East
Variation 21° East

40,00 Set $\frac{1}{4}$ Section post on
level, Drive charred
Stake dry pit and
raised mound as per
instructions,

8000 Set a post corner for
Sections 32 & 33, 4 & 5, on
level, Drive charred
Stake dry pit and
raised mound as per
instructions,

Land gently rolling
Good Grass Soil
good 2nd rate,

Township 4 N Range 35 East Will. M.

S 83° 49' East on true line on
south boundary of section

33 Township 4 N, 35 East
variation 21° East,

1,900 Wild Horse Creek 8 1/2 mile
course N, W,

3,950 Road course North, 30

4,000 Set 1/4 Section post, corner,
Drove charred Stake, dug
pits and raised mound
as per instructions.

8,000 Set a post corner for
sections 33 & 34. 874, Land
gently descends to the N,
Drove charred stake dug
pits and raised mound
as per instructions

Land gently rolling
good good soil
good 2 1/2 date,

573

~~477~~

Township 4N, R. 35 East Will. Mer.

S 85° 45' East, on true line, on
South boundary of section
34 T 4 N Range 35 East,
Var 21° E,

4000 Set $\frac{1}{4}$ section post corner
for sections Drove charred
stake dug pit and raised
mound as per instructions,

8000 Set a post corner for sections
34 35. 273, Land slopes to $\frac{1}{4}$
the south West, deposited
Marbled Stone dug pit and
raised mound as per instruction

Land Building
Soil $\frac{2}{4}$ Rate

South 89° 45' East on true line
on South boundary of
section 35, T 4 N R. 35 E,
Variation 21° 30' East,

Township 4th, Range 35 East Will. Mer.

2100 Road course N, W, 140⁺

4000 Set $\frac{1}{4}$ Section post corner,
in edge of Ravine Course N, 50⁺

Drove charred Stake, dug pits
and raised mound as per
instructions.

8000 Set a post corner for sections
35436, 142, on side hill,

Slopes the N, From which
A Pine 30 in, dia, bears, N74°E, 75 lbs

No other tree near,
dug pits & raised mound
as per instructions
Land broken, soil
2nd rate.

South 89°49' East on true line,
on South boundary of sec,

36, T4th, R35 East,
var ~~N~~ 18°30' East.

4000 Set $\frac{1}{4}$ Section post, 30

Township 40 N Range 35 E Will Mer,
 on side hill sloping to the
 North, from which
 a Pin 30 in dia, bears N 24 E 46 lbs
 a do, 30 do, do, do, S 81 30 W, 78 do,
 8000 To post corner 25
 bar 18 30 E,

This line passes along
 hill side nearly parallel
 with Pine Creek
 Scattered timber
 Pine & Fir, Undergrowth
 same and willow

Survey executed by
 Deputy William H. Cole
 assisted by
 Cyrus Dixon }
 D. C. Wallace } Chasmen
 Robert Cook, Axeman

General Remarks

This Township embraces some good lands for cultivation especially along Wild

Horse Creek, and all that is now subject settlement is ~~not~~ already claimed, that portion lying to the South and West of said Creek is embraced in the Umatilla Reservation for the Indians consequently not subject to settlement,

This Reservation embraces perhaps the best lands in all this region of Country,

On Dry Creek there are several claims in this Township, therefore

This Township ought to subdivided also a portion of Township No 3 N, R 35 East, and all of 4 N 37 E and a portion 3 N, 39 East

The lands in these Townships
are valuable for the timber

I, W. H. Odell do hereby
certify that the foregoing are
the true and original
field notes of the Exterior
line of Township No. 4 North
of range 35 East, made under
Contract No. 110 bearing
date February 7th 1865,
as will appear from affi-
davit made, at the close
of said contract, in due form
and attached to the field
notes of the Exterior lines
of Township No. 6 N of Range
37 East,

William H. Odell
Deputy Surveyor


502

We hereby certify that
 we assisted William H.
 Odell and William S.
 Lewis, deputy surveyors,
 in surveying and marking
 the following lines, to wit;
 The 1st Standard Parallel North
 between Townships 4 & 5 and
 East through Ranges 31. 32,
 33. 34. 35. & 37. East of Will. Mer,
 also the subdivisional lines
 of Townships 5 N. Ranges 33. 35 & 36 E.
 do, 6 N. do, 34. 35 & 36 do,
 do 4 N. do, 32 & 33 do,
 and the Extremors of Townships
 5 N Range 35. 36,
 6 do, do, 34. 35. 36 & 37 East
 4 do do 31. 33. & 35 do,
 and that said lines
 have been in all respects

To the best of our knowledge
and belief, well and
faithfully surveyed, and
the boundary monuments
planted according to the
instructions furnished by
the Surveyor General.

Cyrus Dion Chairman
Robert Beck Assessor

State of Oregon }
County of Benton } 1865 Subscribed
and sworn to before me
this 17 day of June 1865
Geo. W. Cress
Notary Public

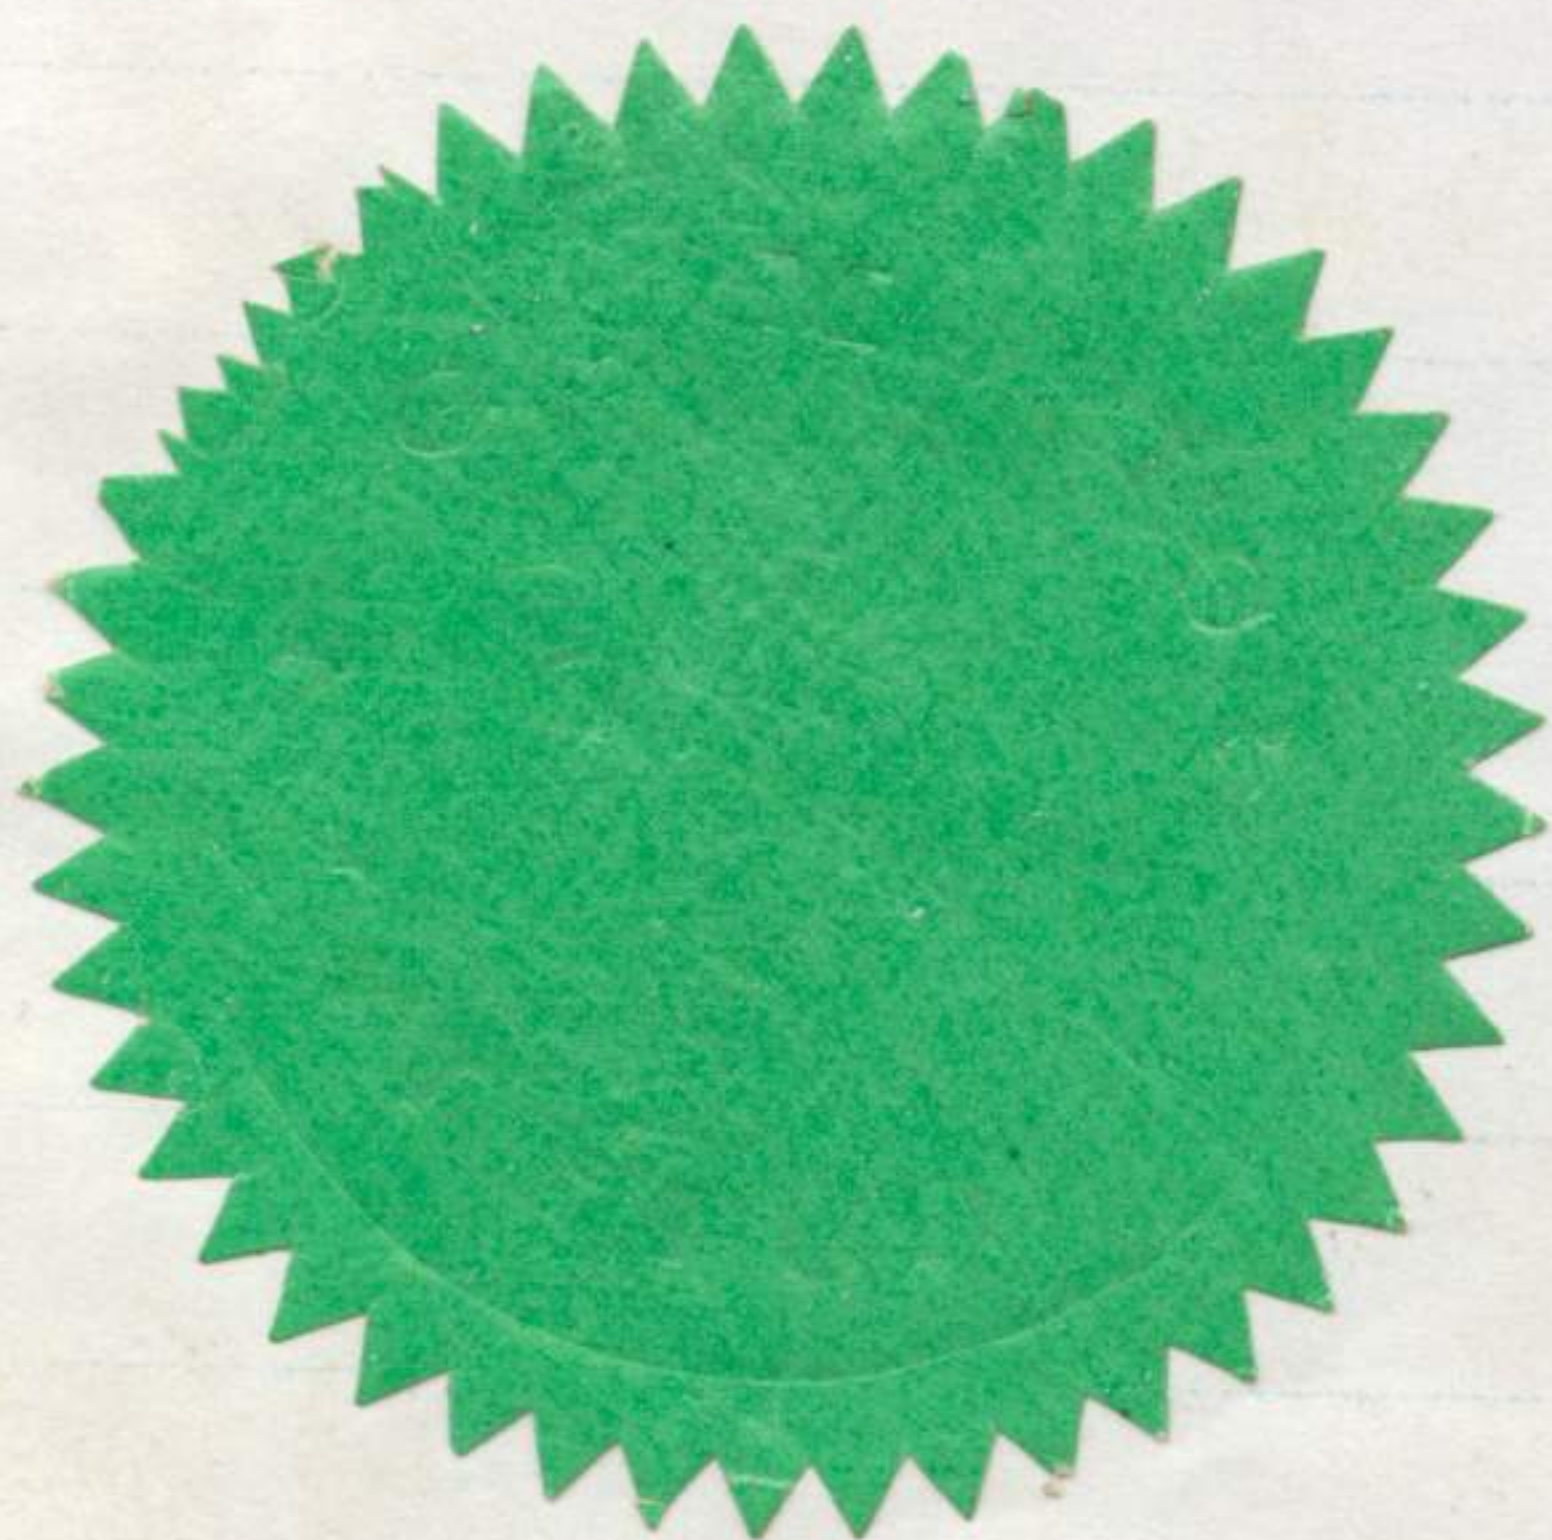

506

602

P.
666-601
Blank



I hereby certify that I assisted
William H. Cull and William S.

Lewis deputy surveyor, in surveying
the following lines, to wit;

The ~~1st~~ Standard Parallel North
between Townships 4 & 5 North and

East through Ranges 31. 32. 33. 34.

35. & 37. East of Willamette Meridian

also the subdivisional lines

of Townships Nos 5 North Ranges 33. 35. & 36 E,

do, do, 6 do, do, 34. 35. & 36 do,

do, do, 4 do, do, 32 & 33 do,

and the Exterior of Townships

Nos 5 North Range 35 & 36, 37 East

do, 6 do, do, 34. 35. 36 & 37, do,

do, 4 do, do, 31. 33. & 35, do,

and that said lines have
been in all respects

to the best of my knowledge and
belief, well and faithfully surveyed,
and the boundary monuments
planted according to the instructions
furnished by the Surveyor General,
D. C. Wallace Chairman

State of Oregon)
County of Lane) ss.

Sworn & subscribed before me this
24th day of June 1865

Joel Mann

Notary Public

