

FIELD NOTES

Of the survey of the Subdivisional Plotment

Lines of T. 2 N. R. 35 E.

----- Willamette Meridian,

Oregon, as surveyed by James P. Plummer

U. S. Deputy Surveyor, under his Contract No. 537

dated March 5 1889

Survey commenced, June 12th 1889

Survey completed, June 13th 1889

NAMES AND DUTIES OF ASSISTANTS,

-----, Compassman.

-----, Chainman.

-----, Chainman.

J. R. Laramore, Chainman.

L. L. Brown, Chainman.

W. M. Stone, Axeman.

R. E. Long, Axeman.

-----, Flagman.

416

PRELIMINARY OATHS OF ASSISTANTS.

We, J. R. Saramore & T. L. Brown

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the subdivisional & Allotment lines of T. 2 N. R. 35 E. Willamette Meridian, Oregon.

J. R. Saramore, Chainman.
T. L. Brown, Chainman.
_____, Chainman.
_____, Chainman.

Subscribed and sworn to before me, this 12th day of June 1889
[SEAL.] Thos FitzGerald
Notary Public

We, E. M. Stone and R. E. Long, do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the Allotment & Subdivisional lines of T. 2 N. R. 35 E. Willamette Meridian, Oregon.

E. M. Stone, Axeman.
R. E. Long, Axeman.

Subscribed and sworn to before me, this 12th day of June 1889
[SEAL.] Thos FitzGerald
Notary Public

INDEX

Referring the Lines to the Pages of the Field Notes.

T. *L. North* R. *35 East* Will. Mer.

6						
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

Meanders of _____ Pages _____ to _____

Meanders of _____ Pages _____ to _____


Allotment

Subdivision of T. 2 North R. 35 East 421

Willamette Meridian, Oregon.

Sec 2.

From the $\frac{1}{4}$ Sec corner
on South side of Sec 35
T. 2 N R. 35 E.
which is a Basalt
stone $10 \times 12 \times 5$ ins 8 ins
in the ground marked
 $\frac{1}{4}$ on N. face and
removed of stone over it.

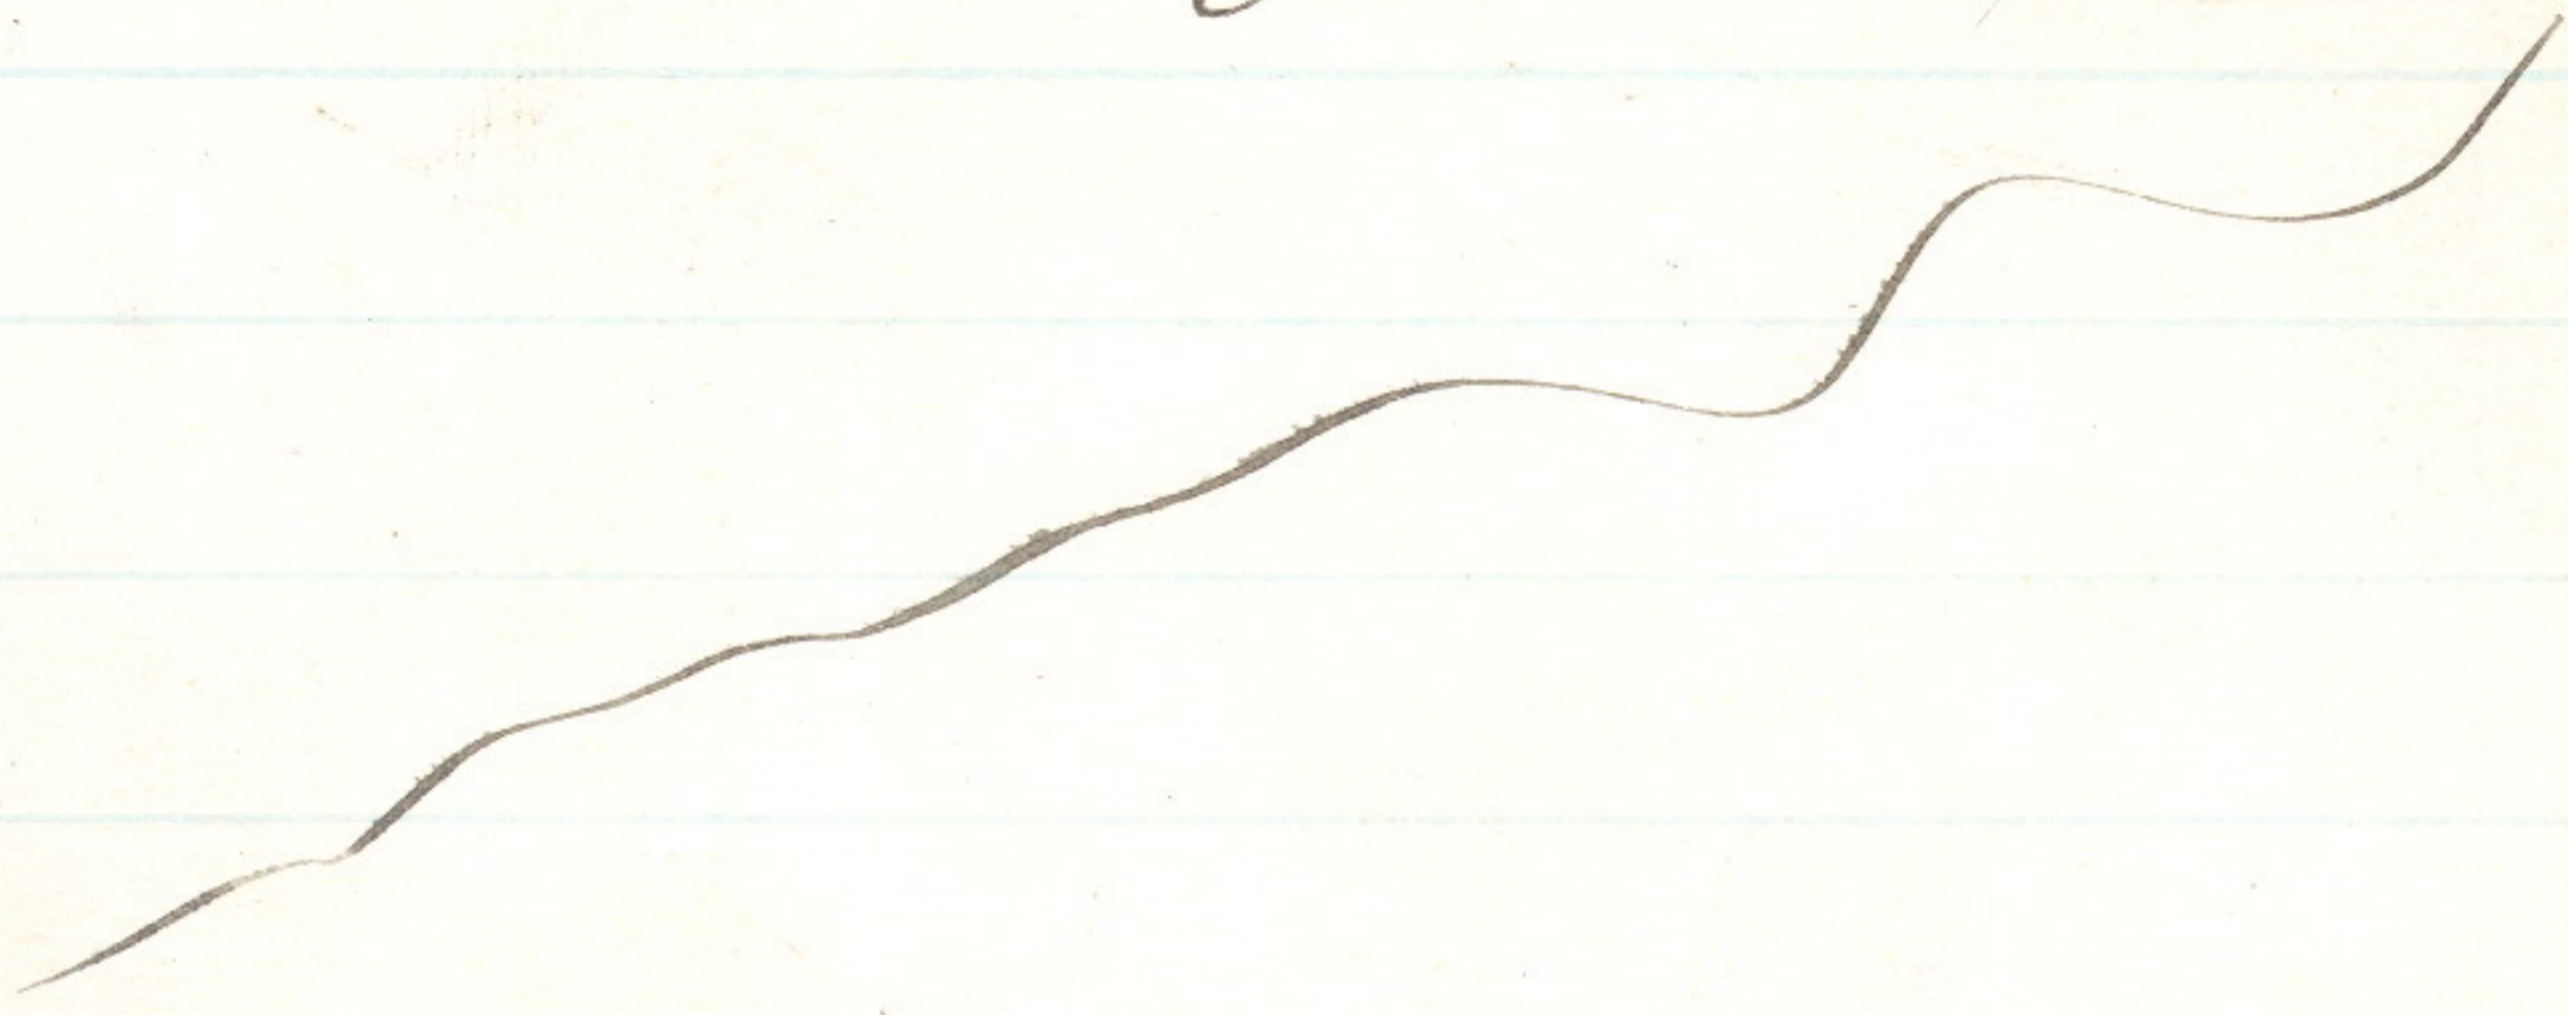

From

South on true line in Sec
2. in T. 2 N R. 35 E.
Var 19° E.

3.37

Set stone $14 \times 10 \times 4$ ins 10 ins
in the ground for $\frac{1}{64}$ Sec
corner marked $\frac{1}{64}$ on N. face
and raised a mound of
stone

2

422

Willamette

Subdivisions of T. 2 North R. 35 East

Willamette Meridian, Oregon.

See 2.

(8093-10 M.)

over it.

Pits unpractical

Land slopes to North

Soil not rate

Grass and sunflowers

Allotment

3

423

Subdiv of T. 2 North R. 35 E.

Willamette Meridian, Oregon.

See 2.

From the $\frac{1}{16}$ Sec corner 20
 chains W. of the $\frac{1}{4}$ Sec
 corner on S. bdy of Sec 35
 which is a post 3 ins square
 firmly set in the ground
 marked $\frac{1}{16}$ S on N face &
 pits 18 + 18 + 12 ins E & W of
 post $5\frac{1}{2}$ ft dia and mound
 of earth $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft
 base around post

Iron

South on true line on Sec
 2^d T. 2 N R. 35 E.
 Var 20° East

3.20

Set post 4 ft long 3 ins
 square 24 ins in the ground
 with charred stake for $\frac{1}{64}$
 $\frac{1}{32}$ Sec corner marked $\frac{1}{64}$ S
 on E and $\frac{1}{32}$ S on W face
 dug pits 18 + 18 + 12 ins

6
426
Allotment

Subdivision of T. 2 North R. 35 E.
Willamette Meridian, Oregon.

Sec 3

(8093-10 M.)

From the closing corner
to Secs 2 & 3 on North edge
of Township which is
a part of an square
firmly set in the ground
marked

T. 2 N R 35 E. C.C. on S.
S 2 on E. & S 3 on
W. faces with 2 notches
on E. and 4 notches on
W. edge and mound of
stone around post

From

S 89° 50' W on random
line on N. edge of Sec 3.
Var 20° E

Setting temporary corners
at 20 chains and at

4010 Intersect the E & W.
line at 1/4 Sec cor

allotment

7
42

Subdiv of T. 2 North R. 35. E.

Willamette Meridian, Oregon.

Sec 3

on S. bdy of Sec 34
T. 3 N. R. 35 E.
which is a

basalt stone 12 x 10 + 10 ins
8 ins in the ground marked
1/4 on N face and mound
of stone over it

Thence I run

N 89° 50' E on a true line
on the N. bdy of Sec 3

15.20 Rail road course S. 80° W ^{Var 20° E}

17.50 Wagon road

20.00 Set stone 14 x 10 + 8 ins

9 ins in the ground for 1/6
Sec. corner marked 1/6 on N.
face dug pits 18 x 18 x 12 in
E & W of stone 5 1/2 ft. dist.
and raised a mound of
earth 1 1/2 ft high 3 1/2 ft
base over it.

23.70 Ascend bluff

8

Alloement

428

Subdiv of T. 2 North R. 35 E.
Willamette Meridian, Oregon.

Sec 3.

(8093-10 M.)

4000

To closing corner to Secs
2 and 3 on N. bdy of
Sp.

Land rough rocky river
bottom. - Balun & fine timber

From the 1/4 Sec corner on S.
bdy of T 34 S 3 N R 35 E
I run

South on true line in
Sec 3. Var 20 E.

11.20

Rail Road course N. E.

13.00

Set basalt stone 10 x 8 x 6 ins

7 ins in the ground for
1/16 Sec corner marked 1/16
on N. face & raised a
mound of stone over it.

Pits unpracticable

Land brushy on River
bottom.