

FIELD NOTES

Of the survey of the Subdivisional allotment

Lines of T. 3 N. R. 35 E

----- Willamette Meridian,

Oregon, as surveyed by James Plurrier

U. S. Deputy Surveyor, under his Contract No. 537.

dated March 5th 1889

Survey commenced, June 8th 1889

Survey completed, June 14th 1889

NAMES AND DUTIES OF ASSISTANTS,

-----, Compassman.

-----, Chainman.

-----, Chainman.

J. R. Laramore, Chainman.

J. L. Brown, Chainman.

C. M. Story, Axeman.

R. E. Long, Axeman.

-----, Flagman.

404
PRELIMINARY OATHS OF ASSISTANTS.

We, J. R. Laramore &
J. L. Brown

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the subdivisional and
Allotment lines of T. 3 N. R.
35 E. Willamette Meridian, Oregon.

J. R. Laramore, Chainman.
J. L. Brown, Chainman.
_____, Chainman.
_____, Chainman.

Subscribed and sworn to before me, this 7th
day of June 1889
[SEAL.] Thos Fitz-Gerald
Notary Public

We, C. M. Stone and
R. E. Long, do solemnly swear
that we will well and truly perform the duties of Axemen in the establishment of corners
and other duties, according to instructions given us, and to the best of our skill and abil-

ity, in the survey of the Subdivisional & Allotment
lines of T. 3 N. R. 35 E. Willamette Meridian, Oregon.


C. M. Stone, Axeman.
R. E. Long, Axeman.

Subscribed and sworn to before me, this 7th
day of June 1889
[SEAL.] Thos Fitz-Gerald
Notary Public

INDEX

Referring the Lines to the Pages of the Field Notes.

T. *3 North* R. *35 East* Will. Mer.

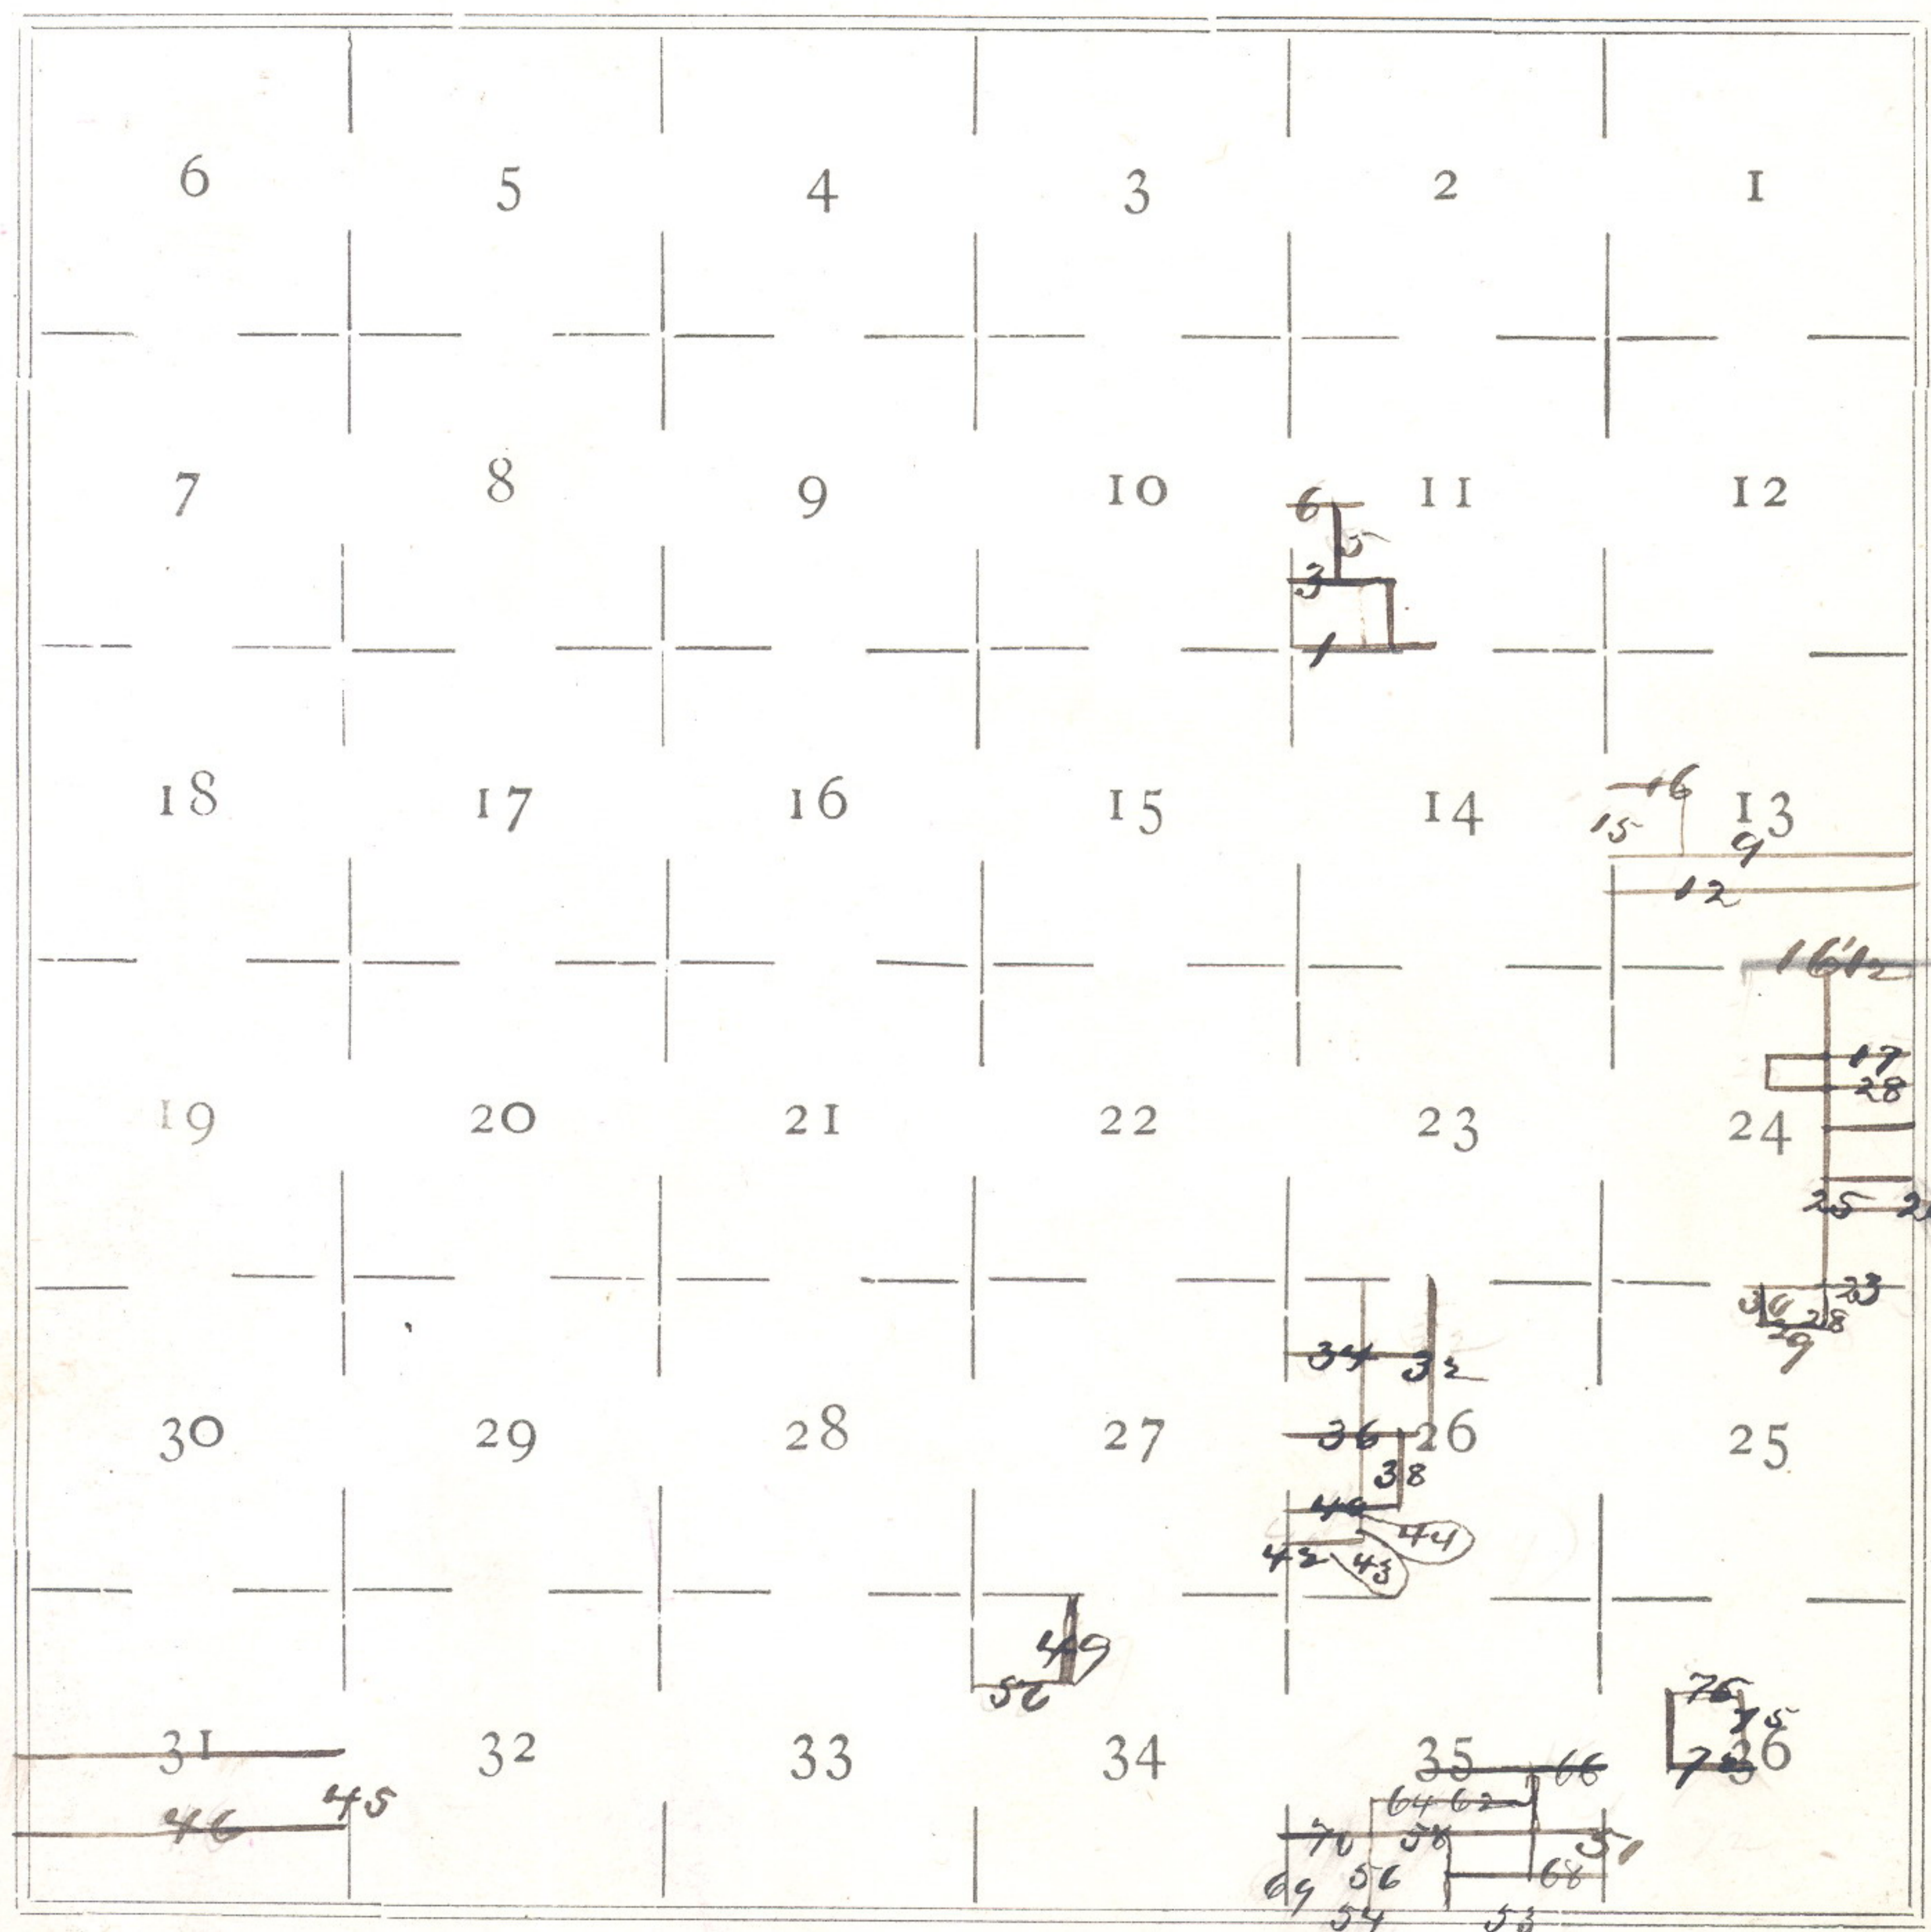

Meanders of _____ Pages _____ to _____

Meanders of _____ Pages _____ to _____

Allotment

53
553

Subdivers of T. 3 North R. 35 East

Willamette Meridian, Oregon.

See 35

Along S. slope rocky

3990 Set basalt stand 26 x 8 x 7 ins
6 ins in the ground for 1/32
See corner marked 1/32 on W face
& raised a mound of stone
around.

File impracticable

3983 The corner to Secs 35 & 36 on
South side of Township which
is a basalt stand 18 x 12 x 4 ins
12 ins in the ground marked
with 1 notch on E. & 5 notches
on W edges & mound of
stone around.

Land encumbering. Feb 20 day

Soil sub rate & pine & other
brush.

Bas. rocky & barren

53 554

allotment

Subdivision of T. 3 North R. 35 E.

Willamette Meridian, Oregon.

See 35

(8093-10 M.)

From the ^{See.} $\frac{1}{4}$ corner on S. bdy of See 35 which is a basalt stone $12 + 10 + 5$ ins 8 ins in the ground marked $\frac{1}{4}$ on N. face, and mound of stone over it.

I run

N. $89^{\circ} 50' E$ on random line on the South bdy of See 35
Var $21^{\circ} E$

Setting temporary corner at 20.00 chains and at

40.20 Intersect the corner to Sees. 35 + 36.

I run

S $89^{\circ} 50' W$. on true line on S. bdy of See. 35
Var $21^{\circ} E$.

20.00

Set post 3 ft long 3 ins sq. 24 ins in the ground for $\frac{1}{32}$ See corner

Allotment

54
555

Subdiv of T. 3 North R. 35 East

Willamette Meridian, Oregon.

Sec 35

marked $\frac{1}{32}$ on N. face dug
 pits 18 + 18 + 12 ins E. + W.
 of post $5\frac{1}{2}$ ft dia raised a
 mound of earth $1\frac{1}{2}$ ft high
 $3\frac{1}{2}$ ft base around post
 Land mountain
 Soil 100 rods
 Grass + brush

From the $\frac{1}{4}$ Sec corner on the
 South ldy of Sec. 35.

I run

$S 89^{\circ} 50' W$ on random line
 on the S ldy. of Sec 35
 Var $21^{\circ} E$

Setting temporary corner at
 20.00 chains and at

40.20 intersect the corner to Sec.
 34 and 35 which is a
 post 4 ins square firmly
 set in the ground marked

59

556

Allotment

Subdivision of T. 3 North R. 35 East
Willamette Meridian, Oregon.

Sec 35

(8093-10 M.)

T. 3 N S 34 on NW

R 35 E. T 35 on NE.

T. 2 N on T with 2 notches

on the E. and 4 notches on

W. edge with pits 18+18+12

ins N E + W. 5 1/2 ft dist.

from post. & mound of earth

2 1/2 ft high 4 1/2 ft base

around post.

Thence I run

N. 89° 50' E on true line

on S body of Sec. 35

var 20° E

2000

Set post 3 ft long 3 ins square

24 ins in the ground for 1/16

+ 1/32. Sec. corner marked 1/16 on

E. & 1/32 on W. face, dug pits

18+18+12 ins. E. & W. of post

5 1/2 ft dist and raised mound

of earth 1 1/2 ft high 3 1/2 ft

58
557
Allotment

Soldiers of T. 3 North R. 35 East
Willamette Meridian, Oregon.

See 35

2019 Base, ground post
4020 Raried curve N.
The $\frac{1}{4}$ Sec corner

Land mountaineers

Soil sub rate

Brush and grass.

From $\frac{1}{16}$ and $\frac{1}{32}$ Sec. corner 20
chains E. of corner to Secs.
34 + 35

From

N. $2^{\circ} 45'$ W. on true line in
See 35.

Var 21° E.

Descend

9.35 Set Stone $18 \times 8 \times 6$ ins 12 ins
in the ground for $\frac{1}{32}$ Sec corner
marked $\frac{1}{32}$ on W. face
dug pits $18 \times 18 \times 12$ ins

580

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by James P

Currier, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field

notes of the survey of the Subdivisional and
Attachment lines of T. 3 N. R. 35

E Willamette Meridian, Oregon, showing the respective capacities in which they acted:

- , **Compassman.**
- , **Chainman.**
- , **Chainman.**
- J. B. Saramore, **Chainman.**
- J. L. Brown, **Chainman.**
- E. M. Stone, **Axeman.**
- B. E. Long, **Axeman.**
- , **Flagman.**

FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted James P

Currier, U. S. Deputy Surveyor, in surveying all

those parts or portions of the Subdivisional &
Attachment of T. 3 N. R.
35 E.

----- Willamette Meridian, Oregon, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- , **Compassman.**
- J. B. Saramore, **Chainman.**
- J. L. Brown, **Chainman.**
- , **Chainman.**
- , **Chainman.**
- E. M. Stone, **Axeman.**
- B. E. Long, **Axeman.**
- , **Flagman.**

Subscribed and sworn to before me, this 2nd day of

July 1889
[SEAL.] Thos Fitz Gerald
Notary Public

FINAL OATH OF DEPUTY SURVEYOR.

I, James P. Plummer
United States Deputy Surveyor, do solemnly swear that in pursuance of

instructions received from Douglas W. Taylor

U. S. Surveyor General for Oregon, bearing date of the 21st

day of March 1889, I have well, faithfully and truly, in my own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor General for Oregon, the Surveying Manual, and the laws of the United States, surveying all those

parts or portions of subdivisional allotment,

lines of T. 34. R. 35 - E

Willamette Meridian, in the State of Oregon, as are represented in the foregoing field notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions, the special written instructions of the U. S. Surveyor General for Oregon, and in the specific manner described in the field notes, and that the foregoing are the true field notes of such survey, and should any fraud be detected I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.

James P. Plummer
U. S. Deputy Surveyor.

Subscribed and sworn to before me, this 2nd

day of July 1889

Thos Fitzgerald
Notary Public

582

Office U. S. Surveyor General,

Portland, Oregon, *Sept. 14* 188*9*

foregoing
The following Field Notes of the Survey of the

Subdivisional and Allotment
Lines of Township 3 North
Range 35 E. Will Mer. Or

executed by *James P. Currier U.S.*
Dept Surveyor

under his Contract No. *537*, dated *March*

5th 188*9*, having been critically examined, the
necessary corrections and explanations made, the said Field Notes
and the survey they describe, are hereby approved.

Douglas W. Taylor
Surveyor General.