

FIELD NOTES

Of the survey of the Subdivisional allotment

Lines of T. 3 N. R. 35 E

----- Willamette Meridian,

Oregon, as surveyed by James Plurrier

U. S. Deputy Surveyor, under his Contract No. 537.

dated March 5th 1889

Survey commenced, June 8th 1889

Survey completed, June 14th 1889

NAMES AND DUTIES OF ASSISTANTS,

-----, Compassman.

-----, Chainman.

-----, Chainman.

J. R. Laramore, Chainman.

J. L. Brown, Chainman.

C. M. Story, Axeman.

R. E. Long, Axeman.

-----, Flagman.

404
PRELIMINARY OATHS OF ASSISTANTS.

We, J. R. Laramore &
J. L. Brown

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the subdivisional
Allotment lines of T. 3 N. R.
35 E. Willamette Meridian, Oregon.

J. R. Laramore, Chainman.
J. L. Brown, Chainman.
_____, Chainman.
_____, Chainman.

Subscribed and sworn to before me, this 7th
day of June 1889

[SEAL.] Thos Fitz-Gerald
Notary Public

We, C. M. Stone and
R. E. Long

do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability,

in the survey of the Subdivisional
Allotment lines of T. 3 N. R. 35 E. Willamette Meridian, Oregon.

C. M. Stone, Axeman.
R. E. Long, Axeman.


Subscribed and sworn to before me, this 7th
day of June 1889

[SEAL.] Thos Fitz-Gerald
Notary Public

INDEX

Referring the Lines to the Pages of the Field Notes.

T. *3 North* R. *35 East* Will. Mer.

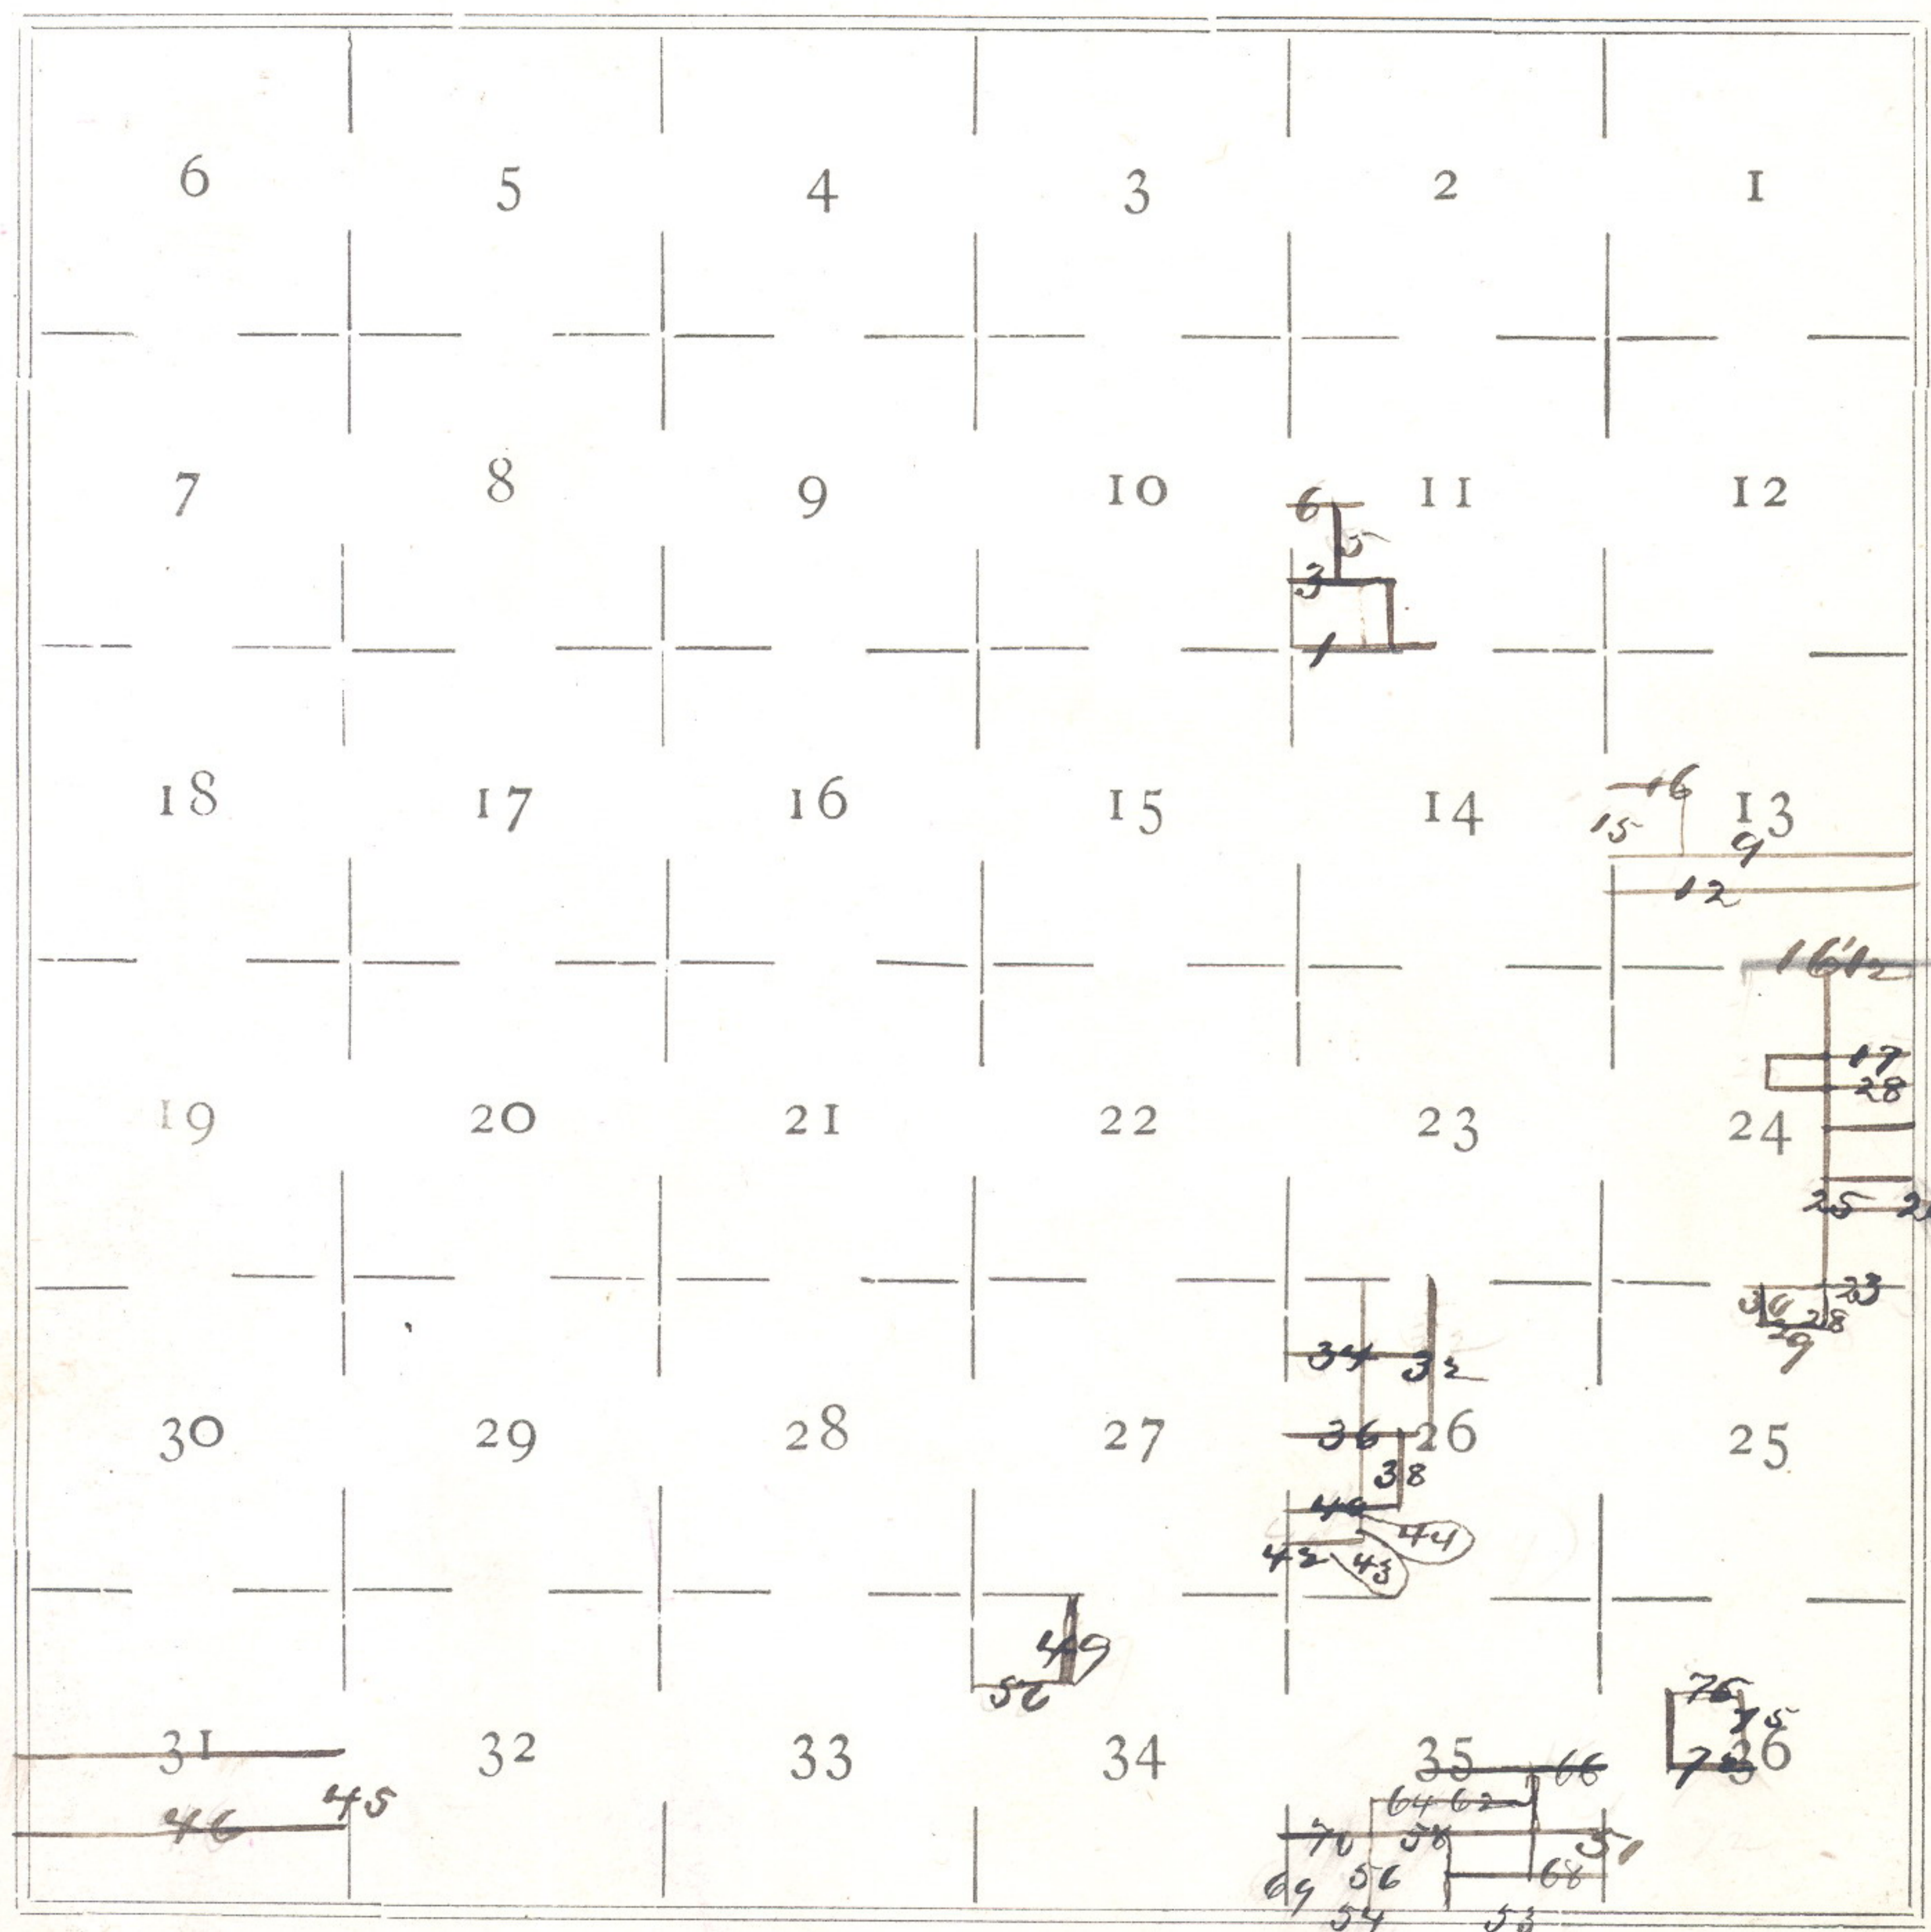

Meanders of _____ Pages _____ to _____

Meanders of _____ Pages _____ to _____

Allotment

9

509

Subdiv of T. 3 North R. 35 East
Willamette Meridian, Oregon.

Sec 13

From the $\frac{1}{4}$ Sec corner bet
Secs 13 and 14 which is a
stone $12 \times 8 \times 6$ ins 8 ins in
the ground marked $\frac{1}{4}$ on
W. face with pits $18 \times 18 \times 12$
ins N. & S. of stone $5\frac{1}{2}$ ft deep
& mound of earth $1\frac{1}{2}$ ft high
 $3\frac{1}{2}$ ft base over it.

From

East on random line
through the centre of Sec. 13
Var 20° East

Setting temporary crosses at
every 20-40 & 60 chains and at
8340 Intersect the N & S line
at $\frac{1}{4}$ Sec corner between
Secs 13 and 18 which is a
basealt stone $9 \times 8 \times 7$ ins
6 ins in the ground marked
 $\frac{1}{4}$ on W. face from which

70
510

Allotment

Subdivision of T. 3 North R. 35 E.

Willamette Meridian, Oregon.

Sec 13

(8093-10 M.)

A pine 24 ins diam bore N 50° E.

22 lbs dirt marked $\frac{1}{4}$ J. B. I.

A pine 16 ins diam bore S 83° W

30 lbs dirt marked $\frac{1}{4}$ J. B. I.

Thence Iron

West on true line through

the Center of Section 13.

Descend Var. 20° E.

2040 Gulch corner North

2085 Set post 3 ft long 3 ins square

24 ins in the ground for $\frac{1}{16}$

See corner marked $\frac{1}{16}$ on N.

face dug pits 18 x 18 x 12

ins E. & W. of post 5 $\frac{1}{2}$ ft. dirt

and raised a mound of

earth 1 $\frac{1}{2}$ ft high 3 $\frac{1}{2}$ ft. low

around it.

4070 Set basalt stone 12 x 8 x 6 ins

8 ins in the ground for $\frac{1}{4}$

See corner marked $\frac{1}{4}$ on

Altogether

Subdivision of T. 3 North R. 35 East 511

Willamette Meridian, Oregon.

See 13.

N. face; dug pits $18 \times 18 \times 12$
ins E. & W of stone $5\frac{1}{2}$ ft dirt
and raised mound of earth
 $1\frac{1}{2}$ ft high $3\frac{1}{2}$ ft base over it.

Descend through Pine timber
49.30 Canyon curve North -250
Ascend

62.55 Set post 3 ft long 3 ins square
with marked stone 12 ins in
the ground for $\frac{1}{16}$ Sec corner
marked $\frac{1}{16}$ S on N face
dug pits $18 \times 18 \times 12$ ins E & W
of post $5\frac{1}{2}$ ft dirt and raised
a mound of earth $1\frac{1}{2}$ ft high
 $3\frac{1}{2}$ ft base around post.

65.40 Summit begin Descend to -250

71.40 Level plateau

83.40 The $\frac{1}{4}$ Sec corner between
Sees 13 & 14.

Land mountainous & rolling
Soil 1st & 2^d into
Grass.

12

512

Allotment

Subdiv of T. 3 North R. 35 East

Willamette Meridian, Oregon.

Sec 13.

(8093-10 M.)

From the $\frac{1}{16}$ Sec corner 20
chains N. of corner to Secs
13-14-23 and 24. which
is a stone 10 + 8 + 7 ins
7 ins in the ground marked
 $\frac{1}{16}$ on N. face pits 18 + 18 + 12
ins N + S of stone $5\frac{1}{2}$ ft dia
& mound of earth $1\frac{1}{2}$ ft high
 $3\frac{1}{2}$ ft base over it.

I run

East on random line
through the $\frac{1}{4}$ of Sec 13.
Var 21° E.

83.70 Setting temporary corners
at 20-40 and 60 chains at
Intersect the East bdy
of Township 10 N. S.
of $\frac{1}{16}$ Sec corner between
Secs 13 + 18 which is a
stone 9 + 8 + 7 ins 6 ins in the
ground marked $\frac{1}{16}$ on N.

Attachment

13
513

Subdivision of T. 3 North R. 35 E.

Willamette Meridian, Oregon.

See 13.

face with pits 18 + 18 + 12 ins
N. & S of stems 5 1/2 ft dist
& mound of earth 1 1/2 ft high
3 1/4 ft base over it.

Thence I run
S 89° 56' W. on true line
through the S 1/2 of See 13
Var 21° E.

- 7.70 Gulch corner S.W.
- 16.70 Foot of hill - 50
- 20.92 Set stand 12 + 11 + 5 in 8 ins
in the ground for 1/6 See corner
corner marked 1/6 on N face
raised mound of stand over
it.

Pits impracticable

- 35.20 Summit
- 41.85 Set stand 14 + 8 + 5 ins
10 ins in the ground

Attachment

16 1/2
517

Subdivision of T. 3 North R. 35 E.

Willamette Meridian, Oregon.

See 24

From the corner to Sees
13 - 18 - 19 and 24

which is a post 4 ins square
firmly set in the ground
marked.

T 3 N R 13 on N.W. R 36 E T 18
on N.E. T 19 on T.E. R 35 E.
T 24 on T.W. with 3 notches on
N. T edges from which

a fine 18 ins diam bears N 8° E.

39 lbs dist marked T. 3 N. R.

36 E. T 18 B T. a fine 36 ins
diam bears S 65° W 122 lbs dist

marked R 35 E. T 24 B T.
4 pits 18 x 18 x 12 ins in Sees 13 + 18
run mound of earth alongside

West on random line

between Sees 13 and 24

Var 18° 45' E.

Setting temporary corner at

19.80 chains, and at

41.62 intersect the 1/4 See corner

between Sees. 13 and 24

which is a stone 12 x 8 x 7

ins 8 ins in the ground

marked 1/4 on N. face

518

Allotment

Subdivision of T. 3 North R. 35 E.

Willamette Meridian, Oregon.

Sec 24

(8093-10 M.)

with pits, ^{18 x 18 x 12 ins} E & W. of stone 5 1/2 ft dirt & mound of earth 1 1/2 ft high 3 1/2 ft base over it
Stone down

Cast on true line between
Secs 13 & 24. Var 19° E.

Through timber

+ 19.80

Set stone 9 x 8 x 7 ins 6 ins
in the ground for 1/6 Sec corner
marked 1/6 on N. face, dug
pits 18 x 18 x 12 ins E & W of
stone 5 1/2 ft dirt, and raised
a mound of earth 1 1/2 ft
high 3 1/2 ft. base over it.

41.62 To corner to Secs. 13-18-19
& 24

Land rolling

Timber on East part

Good grass

Attainment

519
57

Subdivision of T. 3 North R. 35 E.

Willamette Meridian, Oregon.

Sec 24

From the $\frac{1}{16}$ Sec corner 20. chs
S. of the cor to Secs 13-
18-19 & 24 which is a
post 3 ins square firmly
set in the ground marked
 $\frac{1}{16}$ Sec N. face with pits
18 x 18 x 12 ins N & S of post
5 $\frac{1}{4}$ ft ^{and mound of earth} deep, $\frac{1}{2}$ ft high 3 $\frac{1}{4}$
ft. low around post.

I run

West on true line in
Section 24.

Var 19° E.

Over rolling ground

20.80 Sec stake 14 x 8 x 6 ins

6 ins in the ground for $\frac{1}{16}$

Sec corner marked $\frac{1}{16}$ on

N. face and raised a
mound of stone over it

Pits impracticable

27

522

Allotment

Subdivision of T. 3 North R. 35 East
Willamette Meridian, Oregon.

Sec 24

(8093-10 M.)

From the $\frac{1}{32}$ Sec corner
19 chs N of the $\frac{1}{4}$ Sec corner
bet. Secs 19 & 24 which is
a small stone 12 x 10 x 4
ins 8 ins in the ground for
 $\frac{1}{32}$ Sec corner marked $\frac{1}{32}$ on
N. face. with pits 18 x 18 x 12
ins N & S of stone 5 $\frac{1}{2}$ ft dist
mound of earth 1 $\frac{1}{2}$ ft high
3 $\frac{1}{2}$ ft. laid over it.

I run

West on random line in
Section 24.

Var. 19° E.

Setting temporary corner
at 20.80 chs and at

41.60 I intersect the N. & S. line
at $\frac{1}{32}$ Sec corner 30 chs
S. of $\frac{1}{4}$ Sec corner between
Secs 13 & 24
Thence I run

A statement

22

523

Subdiv of T. 3 North R. 36 East
Willamette Meridian, Oregon.

See 24

Cart on true line in See
24.

Var. 19° E.

ascend to

11.00 Summit & descend

19.60 Gulch corner N.W.

2080 Set stone 9 x 8 x 8 ins 6 ins

in the ground per 1/32 Sec
corner marked 1/32 on N face
dug pits 18 x 18 x 12 ins
E. & W. of stone 3 1/2 ft. dist
and raised mound of earth
1 1/2 ft high 3 1/2 ft base over
it.

41.60 To the 1/32 Sec corner

Land rolling
Soil 1st rate
Good grass

Allowance

Subdivision of T. 3 North R. 35 East
Willamette Meridian, Oregon.

See 24

(8093-10 M.)

From the corner to Ties
19-24-25 & 30 which is
a basalt stone 12 x 10 x 8
ins 8 ins in the ground
marked 4 notches on N.
& 2 notches on S. edges
& pits 18 x 18 x 12 ins in each
see 5 1/2 ft. dirt & mound
of earth 2 ft high 4 1/2 ft
long along side.

From

West on true line between
Ties 24 and 25

Var 22" East

200

Gulch corner S.

2090

Set stone 9 x 8 x 7 ins 6
ins in the ground for 1/6
& 1/32 See corner marked 1/6

on N & 1/32 on S. face dug pits
18 x 18 x 12 ins E & W of stone 5 1/2 ft dirt
& raised a mound of earth
1 1/2 ft high 3 1/2 ft long with

580

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by James P. Currier, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field

notes of the survey of the Subdivisional and Allotment lines of T. 3 N. R. 35 E Willamette Meridian, Oregon, showing the respective capacities in which they acted:

- , Compassman.
- , Chainman.
- , Chainman.
- J. B. Saramore, Chainman.
- J. L. Brown, Chainman.
- E. M. Stone, Axeman.
- B. E. Long, Axeman.
- , Flagman.

FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted James P. Currier, U. S. Deputy Surveyor, in surveying all those parts or portions of the Subdivisional & Allotment of T. 3 N. R. 35 E. Willamette Meridian, Oregon,

as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- , Compassman.
- J. B. Saramore, Chainman.
- J. L. Brown, Chainman.
- , Chainman.
- , Chainman.
- E. M. Stone, Axeman.
- B. E. Long, Axeman.
- , Flagman.

Subscribed and sworn to before me, this 2nd day of

July 1889
[SEAL.] Thos Fitz Gerald
Notary Public

FINAL OATH OF DEPUTY SURVEYOR.

I, James P. Pluriss
United States Deputy Surveyor, do solemnly swear that in pursuance of

instructions received from Douglas W. Taylor

U. S. Surveyor General for Oregon, bearing date of the 21st

day of March 1889, I have well, faith-
fully and truly, in my own proper person, and in strict conformity with
the instructions furnished by the U. S. Surveyor General for Oregon, the
Surveying Manual, and the laws of the United States, surveying all those

parts or portions of subdivisional allotment,

lines of T. 34. R. 35 - E

Willamette Meridian, in the State of Oregon, as are represented in the
foregoing field notes as having been surveyed by me and under my direc-
tions; and I do further solemnly swear that all the corners of said survey
have been established and perpetuated in strict accordance with the Sur-
veying Manual, printed instructions, the special written instructions of
the U. S. Surveyor General for Oregon, and in the specific manner de-
scribed in the field notes, and that the foregoing are the *true* field notes of
such survey, and should any fraud be detected I will suffer the penalty of
perjury under the provisions of an Act of Congress approved August 8,
1846.

James P. Pluriss
U. S. Deputy Surveyor.

Subscribed and sworn to before me, this 2nd

day of July 1889

Thos Fitzgerald
Notary Public

582

Office U. S. Surveyor General,

Portland, Oregon, *Sept. 14* 188*9*

foreign
The following Field Notes of the Survey of the

Subdivisional and Allotment
Lines of Township 3 North
Range 35 E. Will Mer. Or

executed by *James P. Currier U.S.*
Dept Surveyor

under his Contract No. *537*, dated *March*

5th 188*9*, having been critically examined, the
necessary corrections and explanations made, the said Field Notes
and the survey they describe, are hereby approved.

Douglas W. Taylor
Surveyor General.