

See page 183
for title page

22.

FIELD NOTES.

On the survey of the Eastern
Lines of Tps 3-4-5 S. R. 34 E
Tps 3-4-5. S. R. 33 1/2 E Willamette Meridian,
Oregon, as surveyed by Rufus J. Moore
U. S. Deputy Surveyor, under his Contract No. 451.
dated June 12th 1882
Survey commenced Oct 13th 1882
Survey completed December 1st 1882

NAMES AND DUTIES OF ASSISTANTS.

....., Compassman.
James Guttridge, Chainman.
John Guttridge, Chainman.
....., Chainman.
....., Chainman.
Joe Parodi, Axeman.
....., Axeman.
....., Flagman.

Copy
23
See page 184 for
these oaths

PRELIMINARY OATHS OF ASSISTANTS.

We, James Guttridge &
John Guttridge

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the Enterings

lines of Tps 3-4 & 5
S. R. 33 1/2 & 34 0 Willamette Meridian, Oregon.

James Guttridge, Chainman.
John Guttridge, Chainman.
_____, Chainman.
_____, Chainman.

Subscribed and sworn to before me, this 15th
day of August 1882

[SEAL.] Rufus S. Morro
Notary Public

We, Joe Parodi and

do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability

in the survey of the Enterings of Townships
3-4-5 S R 33 1/2 & 34 0 Willamette Meridian, Oregon.

Joe Parodi, Axeman.
_____, Axeman.

Subscribed and sworn to before me, this 15th
day of August 1882

[SEAL.] Rufus S. Morro
Notary Public

West by

~~57~~

61
91

Exteriors of T. 4 S R. 33½ E

Willamette Meridian, Oregon.

- 61.80 Creek 15 lks. wide runs N.E. 45 ft below top of hill.
- 67.00 Set temporary cor. to Tps 374 S. R. 33½ E. I do this because the E. boundary of T4S R34 E. is but 67.11 chs. I then run the range line between T4S R. 33½ & 34 E. and likewise establish a temporary cor to T4S. R. 33½ & 34. E at a point 67.00 chs North of cor to sec 1. 12. 6 & 7. and then proceed to the S.W. cor to T3S. R35 E and run due West and establish the corners on the South boundary of T3S - R. 34 & 33½ E. And as the N.W. cor to T4S. R35 E is 18.90 chs East of the S.W. cor to T3S R35 E I am compelled to make a resurvey of said line beginning at the N.W. cor to T4S R35 E.

Q 2

West body

56

92

of T.

R.

Willamette Meridian, Oregon,

and running due West and
Establishing corners for the
North boundary of T4 S.

R_s 34 & 33 1/2 E. I survey the
South boundary of T3 S.

R_s 34 & 33 1/2 E. first in
order to avoid two sets
of quarter sec. cor. on the
same line.

No Description

Oct-31st 1882

Land rolling hills

Soil 2^d & 3^d rate

Heavily timbered with
pine fir & tamarack

South bdy

Enterings of T. 3 South R. 34 ¹¹⁵ East

Willamette Meridian, Oregon.

Land mountainous
Soil 2d & 3d rate

Heavily timbered with
pine fir & tamarack
Dense undergrowth of
pine fir & tamarack

West on South boundary
of Sec. 31.

Var 29° 30' East

Ascend

1500 Top of hill bears N & S.

1969 A pine 40 in in diam

2200 Enter prairie bears N & S

3450 Leave prairie bears N & S.

3665 Spring branch 3 lbs wide
runs N.W.

3962 Spring branch 2 lbs wide
runs N.W.

4000 Set post 4 ft long 3 in
square 24 in in ground

86

South bdy

118' Quarter of T. 3 South R. 34 East


Willamette Meridian, Oregon.

for $\frac{1}{4}$ Sec corner marked
 $\frac{1}{4}$ S on N face

from which
 a pine 7 in diam bears
 N 38° W 23 lks dist marked
 $\frac{1}{4}$ S B.T.

a fir 30 in diam bears
 S 5° W 9 lks dist marked
 $\frac{1}{4}$ S B.T.

42.50	Enter prairie bears N & S.
50.00	Leave prairie bears N & S
53.00	Enter prairie bears N & S.
57.69	Old wagon road bears N & S.

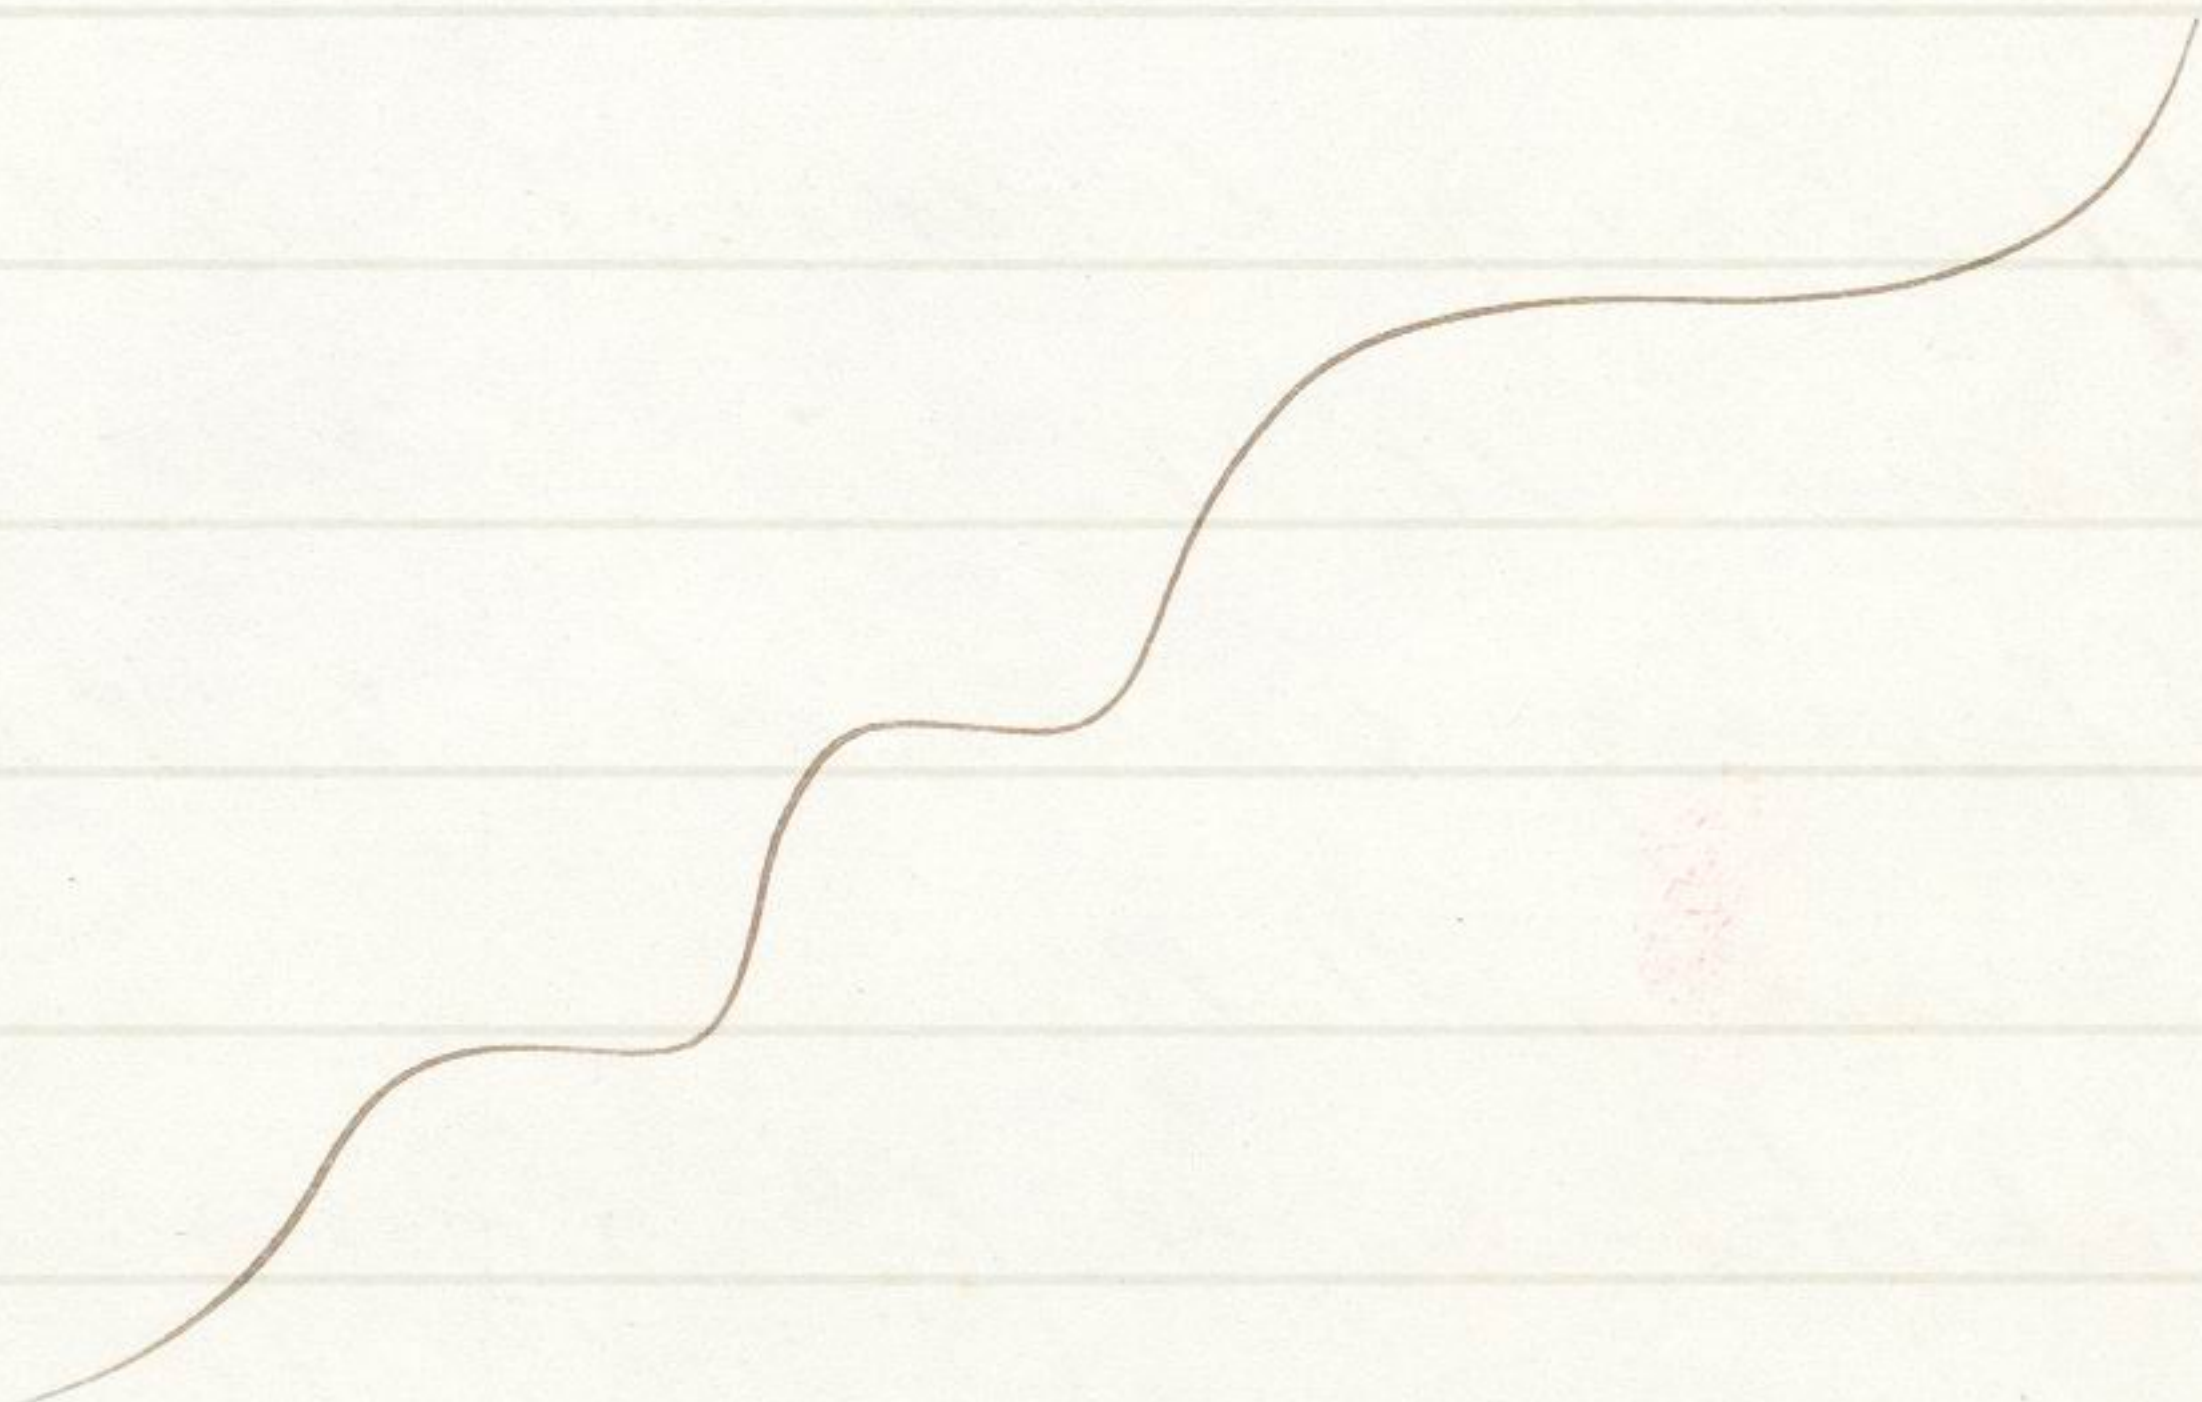

Exteriors of T. S. S. R. 34 E 117

Willamette Meridian, Oregon.

80.00
61.76
18.24

S. Boundary.

61.76 To a point - 130 lks North of the temporary cor. that I established when I ran the W. boundary of T4S R34E. Said point - is therefore 68.30 pks. north of cor to Secs. 6, 7, 15, 12. T4S. R33 1/2 & 34 E. at this point - I set a basalt-stone 30x15x6 ins 22 ins in the ground for cor to Tps 4 S. R33 1/2 and 34 E. marked with 6 notches on the S. E. & W. edges. and raised a mound of stone 3ft-high and 5ft-base alongside. Thence I continue the line West on the South boundary of sec 31.

80.00 Set a basalt-stone 16x10x6 ins. 10 ins in the ground for cor. to Tps 3 S R33 1/2 and 34 E. marked with 6 notches on the E. & W. edges and raised a mound of stone 3ft-high and 5ft-base alongside - Sand rolling - Soil 2d rub - Timber scattering pine 33 chs Prairie 47 chs. Nov 2d 1882

88 118

~~88~~

Extremes of T. 3 S R. 34 E

Willamette Meridian, Oregon.

General Description

This township is high and mountainous and is valuable chiefly for its timber which is of fine quality -

Exteriors of T. 35 R. 33½ E

Willamette Meridian, Oregon.

S — boundary.

From the cor. to T. 35, R. 33½ & 34 E
I run West on the South boundary of
Sec 36. $\text{vw } 20^\circ \text{E}$.

4.50 Ravine course $\text{N } 10^\circ \text{W}$.

40.00 Set a basalt-stone $15 \times 15 \times 10$ ins
10 ins in the ground for $\frac{1}{4}$ Sec. cor
marked $\frac{1}{4}$ on N face. from which
A fir 18 ins diam. bears $\text{N } 15^\circ \text{W } 26$ lks dist-
marked $\frac{1}{4}$ S B.T.

A pine 10 ins diam. bears $\text{S } 41^\circ \text{E } 29$ lks dist-
marked $\frac{1}{4}$ S B.T.

80.00 Set a basalt-stone $18 \times 15 \times 8$ ins, 12 ins
in the ground for cor to Secs 35 &
36. marked with 1 notch on E &
2 notches on the N edges. from which
A pine 12 ins diam. bears $\text{N } 50^\circ \text{E } 189$ lks. dist-
marked T 35 R 33½ E. S 36 B.T.

A pine 11 ins diam. bears $\text{N } 46^\circ \text{W } 220$ lks dist-
marked T 35 R 33½ E - S 35 B.T.

Land rolling - Soil 2d rate.

Heavily timbered with pine & fir 80. chs.

Exteriors of T. 35 R. 33½ E.

Willamette Meridian, Oregon.

S - boundary

West on the south. boundary of sec 35
va 21° E

6.00 Ravine course North

27.00 " " "

40.00 Set a post - 3 ft long, 3 ins. square
24 ins in the ground for ¼ sec. cor.
marked ¼ S on N. face. from which
a pine 10 ins diam. bears S 32° E 13 lbs. dist.
marked ¼ S B. T.

A pine 10 ins diam. bears N 7° E 14 lbs dist.
marked ¼ S B T

76.80 Creek 7 lbs rods runs N.E.

80.00 Set a post 4 ft long, 4 ins square
24 ins in the ground for cor.
to secs 34 & 35 marked.

T 35 R 33½ E on the N.

S 35 on E. and S 34 on N. faces.
with 2 notches on the E. and 1

notch on N. faces. from which
a pine 10 ins diam. bears N 35° E 23 lbs dist
marked T 35 R 33½ E S 35 B. T.

A pine 10 ins diam. bears N 61° W 33 lbs. dist.

South bdy ~~84~~

91

121

Exteriors of T. 38 R. 33½ E.

Willamette Meridian, Oregon.

marked T 3 S R 33½ E, S 34 B. T.
Land rolling.

Soil 2d val. Heavily timbered
with pine & fir 80 chs.

West on the S. boundary of Sec 34

va 20° E.

6.65 Intersect the West-boundary of the
Township. at a point - 100 chs. North of
the temporary corner established
and hence 68.00 chs North of cor. to
Secs. 3 & 10 and 26.31 chs South of
cor. to Tps 3 & 4 S. R. 33½ E.
I set at point of intersection
a post - 4½ ft long 4 ins square
24 ins in the ground for closing
Cor. to Tps 3 & 4 S R 33½ E. marked
6.6 R 33½ E on E.

T 3 S S 34 on N. and T 4 S. S 3 on S.
faces with 6 notches on the N & S. and
3 notches on E faces from which

92

South bdy

~~84~~

122

Exteriors of T. 3 S R. 33 1/2 E.

Willamette Meridian, Oregon.

A pine 10 ins. diam. bears N 39° E 23 lbs. dist.
marked T 3 S R 33 1/2 E. S 34 B. T.

A pine 34 ins. diam. bears S 40° E 43 lbs dist.
marked T 4 S R 33 1/2 E. S 3 B. T.

Sand rolling - Soil 2d sub
Nearly timbered with pine and
fir 6.65 chs -

Nov 3d 1882

100

North body

~~74~~

130

Exteriors of T. 4 S R. 33 1/2 E

Willamette Meridian, Oregon.

From the cor to T4S R. 33 1/2 T34 E
I run

West on the N. boundary of Sec 1
(va 20° E)

18.24 The cor to T3S. R. 33 1/2 T34 E.

58.30 The 1/4 Sec cor

80.00 Set a basalt-stone 20x10x8 ins
15 ins in the ground for cor to
Secs 1. and 2. marked with
with 1 notch on the E and 2 notches
on W. edges. from which

A pine 4 ins. diam. bears S 51° E 75 lks. dist.
marked T4S R 33 1/2 E S 1 B.T.

A pine 8 ins diam. bears S 14° W. 135 lks. dist.
marked T4S R 33 1/2 E S 2 B.T.

Land rolling

Soil 2d rate

Heavily timbered with pine
and fir -

North hely

927

107

Exteriors of T. 4 S R. 33½ E.

131

Willamette Meridian, Oregon.

West on the north boundary of sec. 2
va 21° E.

18.20 The cor. to sees 35 & 36 T 3 S R 33½ E

58.19 The ¼ Sec cor.

80.00 Set a basalt stone 18x12x10 ins 12 ins
in the ground for cor. to sees 2 & 3.
marked ~~131~~ on the S. with 2 notches
on the E. and 1 notch on the W. edges.
from which

A pine 10 ins diam. bears S 15° E 230 lbs dist.
marked T 4 S R 33½ E S 2 B. T.

A pine 18 ins diam. bears S 79° W. 231 lbs dist.
marked T 4 S R 33½ E S 3 B. T.

Land rolling

Soil 2d class

Heavily timbered with pine
and fir -

102

North body **

132

Extremities of T. 4 S R. 33 1/2 E

Willamette Meridian, Oregon.

West on the N. boundary of Sec 3
Va 20° E

17.98 The cor to Secs 34 & 35 T 35 R 33 1/2 E

24.44 The cor to Tps 3 & 4 S R 33 1/2 E

Land rolling

Soil 2d sub-

Heavily timbered with pine
and fir -

General Description

This Township ~~of P 4 S~~
~~R 33 1/2 E~~ is high & rolling
land, It is generally heavily
timbered of good quality
with undergrowth

Nov 5th 1882

Copy
180
see page 220
for these oaths

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by Rufus S. Moore, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field notes of the survey of the Enterum lines of Trs 3-4-5 S. R. 33 1/2 & 34 E. 2d Willamette Meridian, Oregon, showing the respective capacities in which they acted:

_____, Compassman.
James Gutteridge, Chainman.
John Gutteridge, Chainman.
_____, Chainman.
_____, Chainman.
Joe Parodi, Axeman.
_____, Axeman.
_____, Flagman.

FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted Rufus S. Moore, U. S. Deputy Surveyor, in surveying all those parts or portions of the Enterum lines of Trs 3-4-5 S. R. 33 1/2 & 34 E. 2d Willamette Meridian, Oregon, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been, in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

_____, Compassman.
James Gutteridge, Chainman.
John Gutteridge, Chainman.
_____, Chainman.
_____, Chainman.
Joe Parodi, Axeman.
_____, Axeman.
_____, Flagman.

Subscribed and sworn to before me, this 21st day of November 1882

[SEAL] Rufus S. Moore
Notary Public

Copy
181

See page 22!
for this oath

FINAL OATH OF DEPUTY SURVEYOR.

I, Rufus S Moore

United States Deputy Surveyor, do solemnly swear that in pursuance of

instructions received from James C. Tolman

U. S. Surveyor General for Oregon, bearing date of the 28th

day of June, 1882, I have well, faith-

fully and truly, in my own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor General for Oregon, the Surveying Manual, and the Laws of the United States, surveying all those

parts or portions of the Eastern lines of
Tps 3-4-5 S. R. 33 1/2 & 34 East

Willamette Meridian, in the State of Oregon, as are represented in the foregoing Field Notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, Printed Instructions, the Special Written Instructions of the U. S. Surveyor General for Oregon, and in the specific manner described in the Field Notes, and that the foregoing are the true Field Notes of such survey, and should any fraud be detected I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8th, 1846.

Rufus S Moore
U. S. Deputy Surveyor.

Subscribed and sworn to before me, this 10th

day of July, 1883

Barnford Robb
Notary Public

(Seal)

182

OFFICE U. S. SURVEYOR GENERAL,

Portland, Oregon, *Feb 1,* 1884

The following Field Notes of the Survey of the

Outer line of Tps

3 - 4 - 5 South Range

33 1/2 and 34 O Will Met

Oregon
executed by

Refus S. Moore

under his Contract No. *451*, dated *June*

12th 1882, having been critically examined,

the necessary corrections and explanations made, the said

Field Notes and the survey they describe are hereby approved.

James C. Tolson

Surveyor General.