

## Index.

Referring the lines to the pages of the field notes  
 Township 4 North, Range 34 East, Will. Mer.

6	38	5	28	4	22	3	15	2	8	1
57		37		28		21		14		8
17	36	8	27	9	21	10	14	11	7	12
35		35		26		20		13		7
18	34	17	26	16	19	15	13	14	6	13
34		23		25		19		12		5
19	33	20	25	21	18	22	12	23	5	24
32		31		27		18		11		4
30	31	29	24	28	17	27	11	26	3	25
30		29		23		16		10		3
31	29	32	23	33	16	34	9	35	2	36

Field Notes of the subdivision  
lines of Township No. 4 North  
Range 34 East of Willamette  
Meridian.

Subdivision commenced  
July 31<sup>st</sup> 1866.

From the corner to sections  
1. 2. 35 & 36. on the South  
boundary of the Township.

I run  
North between sections 35 & 36.

40.00 Set post corner for 1/4 section  
drove charred stake; dug pits;  
and raised mound as per  
instructions.

80.00 Set post corner for sections 25; 26 level  
35 & 36, drove charred stake; dug  
pits; and raised mound as  
per instructions.

Land gently rolling, good

3 403

Township No 4 North Range 34 East.  
Grass, soil good 2<sup>nd</sup> Rate.

\* Commence East on Boundary between  
sections 25 & 36. Bar 21° East,

40.11 Set temporary 1/4 section  
corner post.

80.23 Intersect N & S line 12 lbs  
North of Post corner.

S 89° 54' West on true line.

40.11 Set post corner for 1/4 section

Drove charred stake; dug pits;  
and raised mound as per  
instructions.

80.23 To post corner,

Land gently rolling;

x good grass; soil good 2<sup>nd</sup> rate.

North between sections  
25 & 26.

Bar 21° East,

40.00 Set post corner for 1/4 section

Drove charred stake; dug pits;

Township No 4 North Range 34 East  
and raised mound as per  
instructions.

<sup>52.85</sup>  
5285 Wild Horse Creek 10 lbs wide course S.W.

And enter field

<sup>40.00</sup>  
80.00 Set post corner for sections 23. 15  
24. 25 & 26. Drove charred stake;  
dug pit - and raised mound as  
per instructions.

Land gently rolling;

Soil 1<sup>st</sup> Rate.

x

\* East on random between  
sections 24 & 25.

Bar 20° East.

<sup>40.00</sup>  
40.00 Set temporary 1/4 section post  
corner;

<sup>40.40</sup>  
80.40 Intersect North and South line  
26 lbs North of Post corner,  
S 89° 49' W on true line.

40.20 Set true corner, drove charred stake;  
dug pit; and raised mound as  
per instructions.

+

5 405

Township N 4 North Range 34 East, Will. Mer.

4500 Wild Horse Creek 10 fms wide

Course S.W.

45.50 Enter field

80.40 To Post corner.

Land gently rolling;

Soil 1<sup>st</sup> Rate - July 31<sup>st</sup> 1866

+

+

North between sections 23 & 24,

156  
40.00

same field  
Set post corner for 1/4 section above  
churned stake; dug pits, and  
raised mound as per instructions;

80.00 Set Post corner for sections

13. 14. 23 & 24., above churned  
stake dug pits and raised  
mound as per instructions.

Land gently rolling,  
good grass; soil good  
2<sup>nd</sup> rate.

x

East on random between  
sections 13 & 24.

Bar 20° 30' E.

Township North Range 34 East William D Meridian

40.00 Set temporary 1/4 section post.

80.33 To post corner.

Thence West on true line.

40.16 Set post corner for 1/4 section drove charred stake, dug pits, and raised mound as per instructions.

80.33 To post corner.

Land rolling, grass good, soil 2<sup>nd</sup> rate.

X

North between sections 13 & 14.

40.00 Set post corner for 1/4 section drove charred stake dug pits, and raised mound as per instructions.

80.00 Set post corner for sections 11. 12. 13 & 14. drove charred stake dug pits, and raised mound as per instructions.

Land rolling, grass good, soil 2<sup>nd</sup> rate.

X

7 407

Township No 4 North Range 34 East Will. Mer.

East on random between sections 12 & 13.

Bar 20° 30' East =

40.00 Set temporary 1/4 section corner

80.22 Intersected north and south

line 32 lbs north of Post corner

N 89° 46' W, on true line

40.11 Set post corner for 1/4 section, drove to

churned stake dug pit, and raised

mound as per instructions.

This corner is in wide ravine

80.22 To post corner.

+  
15

Land broken, with

good grass, Soil good

2<sup>nd</sup> rate -

X

North between sections 11 & 12,

40.00 Set post corner for 1/4 section

Drove churned stake dug pit

and raised mound as per

instructions.

80.00 Set post corner for sections

Township No. 4 North, Range 34 East, Willamette Meridian.

1. 2. 11 & 12. Drove charred stake,  
dug pits and raised mound as per  
instructions.

Land broken, grass good, soil 2<sup>d</sup> Rate

East on random between sections  
1 & 12.

Bar 20° East.

40.00 Set temporary 1/4 section post corner

80.56 Intersect North and South line 40 lbs  
North of post corner.

N 85° 43 W, on true line.

40.28 Set 1/4 section post corner, drove  
charred stake dug pits and raised  
mound as per instructions

80.56 ~~S.~~ post corner

Land broken, good grass.

Soil 2<sup>d</sup> Rate.

North between sections 1 & 2.

40.00 Set post corner for 1/4 section, drove  
charred stake, dug pits, and



9 2409

Township No 4 North Range 34 East Williamst Meridian

raised mound as per instructions

69.46 Intersect 1<sup>st</sup> Standard North, 5.94 chs

West of Standard and corner for sections

35 & 36, S 5<sup>th</sup> N R 34 E. Set Closing corner  
for sections 1 & 2 at intersection

above charred stake, dug pits

and raised mound as per instructions

Land broken covered with good

grass, Soil 2<sup>nd</sup> Kate

August 1<sup>st</sup> 1866.

X

North between sections 34 & 35,

40.00 Set post corner for 1/4 section. Above charred  
stake, dug pits; and raised mound as  
per instructions,

60.75 Wild Horse Creek 10 the wide course N.W.,

61.00 Center field,

67.00 Leave field course of fence E & W,

80.00 Set post corner for sections 26, 27.

34 & 35, above charred stake, dug  
pits, and raised mound as  
per instructions.

Land level, Soil 1<sup>st</sup> Kate.

Township No. 4 North, Range 34 East, Willamette Meridian.

Some willow along the banks of the  
Creek. There is a small grove of  
Cottonwood timber just below the  
line. Mr Edwards house  
bears S 50 W. from corner about  
25 chs -

+

com East on random between sections 26 & 35.  
Bar 20' East -

40.00 Set temporary  $\frac{1}{4}$  section post corner

79.60 Intersected North and South line  
30 lbs south of Post corner -

S 89° 47' W on true line

39.80 Set  $\frac{1}{4}$  section post corner drove  
churned stake, dug pit, and  
raised mound as per instructions

52.10 Wild Horse Creek 10 lbs wide course S.W.

52.20 Enter field,

75.10 Leave field. course of fence S. of W.

79.60 To post corner,

Level level, Soil  $\frac{1}{2}$  rate,

+

112 411

Township No. 4 North, Range 34 East, Will. Mer.

North between sections 26 & 27.

32.50 Road course West

40.00 Set post for 1/4 section corner, drove 10  
churned stake dug pits and  
raised mound as per instructions

80.00 Set post corner for sections 22. 15

23. 26 & 27. Drove churned stake,  
dug pits and raised mound  
as per instructions.

Land rolling, good grass  
soil 2<sup>nd</sup> rate.

+

East on random between  
sections 23 & 26.

Bar 20° East.

40.00 Set temporary 1/4 section post corner,

80.10 Intersect North and South line 20 the  
North of post corner,

N 85° 51' W on true line.

2.00 Leave field

2.50 Road course S of West,

40.05 Set post corner for 1/4 section, drove,

Township No. 4 North, Range 34 East, Willamette Meridian.

Churred stake, dug pits, and raised mound as per instructions.

80,10 To post corner,

Land rolling, good grass,

X Soil 2<sup>d</sup> rate,

North between sections 22 & 23.

4,00 Set post corner for 1/4 sections above, churred stake, dug pits and raised mound as per instructions.

8,00 Set post corner for sections 14, 15, 22 & 23

Above churred stake dug pits, and raised mound as per instructions.

Land rolling, grass good,

X Soil 2<sup>d</sup> rate.

East on random between sections 14 & 23.

Bar 20' East.

40,00 Set temporary 1/4 section corner post.

80,20 Intersect North and south line at post West on true line,

413

Township No. 4 North, Range 34 East, Willamette Meridian

4010 Set post corner for 14 section, drove charred stake, dug pit and raised mound as per instructions.

8020 To post corner Land 2<sup>nd</sup> Rate

+

North between sections 14 & 15.

4000 Set post corner for 14 section, drove charred stake dug pit and raised mound as per instructions.

8000 Set post corner for sections 10, 11, 14 & 15, drove charred stake, dug pit and raised mound as per instructions.

+ Land rolling soil 2<sup>nd</sup> Rate.

East on random between sections

11 & 14.

Bar 20° East.

4000 Set temporary 1/4 section post corner,

8026 Intersect North and south line 15 the South of Post,

S 89° 54' W, on true line

Township No 4 North, Range 34 East, Willamette Meridian.

40,13 Set post corner for 1/4 section corner  
drove charred stake dug pits, and  
raised mound as per instructions,

80,26 To post corner,

Land broken, good grass,

X Soil 2<sup>d</sup> rate,

North between sections 10 & 11.

40,00 Set post corner for 1/4 section,  
drove charred stake, dug pits,  
and raised mound as per  
instructions.

80,00 Set post corner for sections 2, 3,  
10 & 11. drove charred stake, dug  
pits, and raised mound as per  
instructions.

Land rolling, good grass

X Soil 2<sup>d</sup> rate.

East on random between sections

2 & 11.

Bar 20° 30' East-

15 415

Township No 4 North, Range 34 East, Will. Mer.

40.00 Set temporary 1/4 section post corner,

80.22 Intersect North and south line 19 lbs

South of post corner,

S 89° 52' W on true line

40.11 Set post corner for 1/4 section.

Drove charred stake, dug pits,  
and raised mound as per instructions.

80.22 To post corner -

Land rolling, good grass

X Soil 2<sup>nd</sup> rate,

North between sections 2 & 3.

40.00 Set post corner for 1/4 section,

drove charred stake, dug pits,

and raised mound as per instructions

70.25 Intersect First Standard North

6.71 chs West of Standard corner

for sections 34 & 35 T. 5 N., R. 34 E.

At point of intersection set

post corner for sections

2 & 3. Drove charred stake, dug

pits and raised mound as per

Township 4 North, Range 34 East, Will. Mer.  
instructions.

Land rolling, good grass,  
Soil 2<sup>nd</sup> rate,

+

August 2<sup>nd</sup> 1866.

North between sections 33 & 34.

40.00 Set post corner for 1/4 section, drove  
churned stake, dug pit, and  
raised mounds as per instructions

80.00 Set post corner for sections 27,  
28, 33 & 34. Drove churned stake,  
dug pit and raised mound  
as per instructions.

Land rolling, good grass,  
Soil 2<sup>nd</sup> rate,

+

East on meridian between  
sections 27 & 34.

Var 21° East.

40.00 Set temporary 1/4 section corner  
79.13 Intersect North and South line  
29 lbs north of post corner,



Township 4 North, Range 34 East, Will, Mex,

N 89° 48' W on true line.

39.86 Set post corner for 1/4 section,  
drove charred stake dug pits,  
and raised mound as per  
instruction.

79.73 To post corner.

Land rolling, good  
grass, Soil 2<sup>d</sup> rate.

+

North between sections 27428,

250 Road course E. & W.

40.00 Set post corner for 1/4 section  
drove charred stake, dug  
pits, and raised mound as per  
instructions.

80.00 Set post corner for sections  
21, 22, 27428. drove charred  
stake dug pits and raised  
mound as per instructions

Land broken, grass  
excellent, Soil 2<sup>d</sup> rate,

+

418

Township No 4 North, Range 34 East Will. Mer,

East on random between sections  
22, & 27.

Over 21° East

40.00 Set temporary  $\frac{1}{4}$  section corner.

79.84 Intersect North and South line  
34 lbs north of post corner.

N 89° 45' W on true line.

39.92 Set post corner for  $\frac{1}{4}$  section drove.  
Charred stake, dug pit, and raised  
mound as per instructions.

79.84 To post corner.

Land broken, grass good.

Soil 2<sup>nd</sup> Rate.

North between sections 21 & 22.

40.00 Set post corner for  $\frac{1}{4}$  section, drove  
charred stake, dug pit, and  
raised mound as per instructions

80.00 Set post corner for sections  
15, 16, 21 & 22, drove charred stake,  
dug pit, and raised mound as  
per instructions.

Township No. 4 North, Range 34 East, Will. Mer.

Land rolling good  
Grass Soil 2<sup>nd</sup> Rate,

East on random between  
sections 15 & 22.

Bar 21° East

40.00 Set post corner for 1/4 section.

temporarily

79.77 Intersect North and south line

54 lbs north of post corner,

N. 89° 37' W. on true line

39.88 Set post corner for 1/4 section

drove charred stake, dug pit,

and raised mound as per  
instructions.

79.77 To post corner,

Land broken, good grass,

+ Soil 2<sup>nd</sup> Rate,

North between sections 15 & 16.

40.00 Set post corner for 1/4 section,

drove charred stake, dug pit,

2 Township No 4 North, Range 34 East, Will. Mer,  
and raised mound as per  
instructions.

20  
420

8.00 Set post corner for sections 9, 10,  
15 & 16, drove charred stake, dug  
pit, and raised mound as per  
instructions.

Land broken, good grass,  
+ Soil 2<sup>d</sup> Rate.

East on random between  
sections 10 & 15.

Bear 20° 30' East.

40.00 Set post corner for 1/4 section  
temporarily.

79.80 Intersect North and South line.

47 lbs North of post corner  
N. 89° 40' W. on true line.

39.90 Set post corner for 1/4 section  
drove charred stake, dug pit,  
and raised mound as per  
instructions.

79.80 To post corner,

21 7 421

Township No. 4 North, Range 34 East, Will. Mer.  
Land broken, good grass  
Soil 2<sup>nd</sup> rate,

X

North between sections 9 & 10.  
40.00 Set post corner for 1/4 sections  
above charred stake, dug pits,  
and raised mound as per  
instructions.

80.00 Set post corner for sections 3 & 4.  
9 & 10. Above charred stake,  
dug pits and raised mound  
as per instructions.

Land rolling, good  
grass soil 2<sup>nd</sup> rate,

X

East on Mandorn between  
sections 3 & 10

Bear 20° East

40.00 Set temporary 1/4 section corner

79.92 Intersect North and South line  
38 lbs North of post corner.  
N 89° 44' W on true line.

Township N. 4 North, Range 34 East Willamette Mer-

39.96 Set post corner for  $\frac{1}{4}$  section, drove charred stake dug pits, and raised mound as per instructions.

79.92 Go post corner,  
 Land broken, good grass,  
 Soil 2<sup>d</sup> rate,

com

North between sections 344.

40.00 Set post corner for  $\frac{1}{4}$  section, drove charred stake dug pits and raised mound, as per instructions,

69.57 Intersect 1<sup>st</sup> Standard North 6.85 lbs West of Standard corner for sections 33434, T. 5 N., R. 34 E., Set closing corner at point of intersection, drove charred stake dug pits, and raised mound as per instructions,

Land broken, good grass,  
 Soil 2<sup>d</sup> rate,

August 3<sup>d</sup> 1866.

X

23

423

Township No. 4 North, Range 34 East, Willamette Meridian  
North between sections 32 & 33.

40.00 Set post corner for 1/4 section drove charred  
stake, dug pits and raised mound as  
per instructions.

45.35 Road course East & West,

80.00 Set post corner for sections 28, 29, 32 & 33,  
drove charred stake, dug pits, and  
raised mound as per instructions.

Land broken, good grass,  
Soil good 2<sup>nd</sup> rate.

X

East on random between sections  
28 & 32,

33(?)

Bar 21° East.

40.00 Set temporary 1/4 section post corner

80.20 Intersected north and south line

30 lbs south of post corner,

S 89° 47' W on true line.

6.20 Road course S. W. & N. E.

40.10 Set post corner for 1/4 section drove  
charred stake dug pits and raised  
mound as per instructions.

X 80.20 To post corner

Township No. 4 North, Range 34 East, Will. Mer,  
 Land broken, grass excellent,  
 Soil good 2<sup>d</sup> rate,

+

North between sections 28429.

40.00 Set post corner for  $\frac{1}{4}$  section, drove  
 charred stake dug pits and raised  
 mound as per instructions.

80.00 Set post corner for sections 20. 21. ~~28429~~<sup>28 29</sup>,  
 drove charred stake dug pits and  
 raised mound as per instructions.

Land broken, grass excellent  
 Soil 2<sup>d</sup> rate,

x

East on random between sections  
 21428,

Bar 21° East,

40.00 Set temporary  $\frac{1}{4}$  section corner.

80.37 Intersect North and South line

24 lbs South of post corner

S 89° 50' W on true line,

40.15 Set post corner for  $\frac{1}{4}$  section, drove  
 charred stake, dug pits and



Township No 4 North, Range 34 East, Will. Mer.

80,31 raised mound as per instructions  
To post corner,  
Land rolling, grass excellent,  
+ Soil 2<sup>nd</sup> Rate,

North between sections 20 & 21.

40,00 Set post corner for 1/4 section, drove  
charr'd stake, dug pits, and  
raised mound as per instructions.

80,00 Set post corner for sections 16, 17.

20 & 21. drove charr'd stake dug  
pits and raised mound as per  
instructions.

Land broken, grass excellent.  
+ Soil 2<sup>nd</sup> Rate,

East on random between  
sections 16 & 21.

Bar 20° 45' East -

40,00 Set temporary 1/4 section post  
corner,

80,58 Intersect North and south line  
10 lbs south of post corner,

Township 44 North Range 34 East Will. Mer.

S 89° 56' West on true line

40.29 Set post corner for 1/4 section.

Drove charred stake, dug pit, and raised mound as per instructions

80.58 To post corner.

Land broken, grass

X Excellent, Soil 2<sup>d</sup> rate.

North between sections 16 & 17.

40.00 Set post corner for 1/4 section

Drove charred stake, dug pit, and raised mound as per instructions

80.00 Set post corner for sections 8, 9, 16 & 17.

Drove charred stake dug pit and raised mound as per instructions.

Land broken, grass excellent,

X Soil 2<sup>d</sup> rate.

East on random between sections

9 & 16

Over 21° East.

40.00 Set temporary 1/4 section post corner

27

427

Township No 4 North, Range 34 East, Will, Okla.

8063 Intersected North and south line

35 lbs south of post corner.

S 88° <sup>45'</sup> 53' W on true line.

4031 Set post corner for 1/4 section drove

charred stake, dug pits and

raised mound as per instructions

8063 To post corner,

Land broken, grass excellent,

Soil 2<sup>d</sup> rate.

North between sections 8 & 9.

4000 Set post corner for 1/4 section

drove charred stake, dug pits, and

raised mound as per instructions.

8000 Set post corner for sections 4, 5, 8 & 9,

drove charred stake, dug pits,

and raised mound as per

instructions

Land broken, grass excellent,

Soil 2<sup>d</sup> rate.

Township No 4 North, Range 34 East, Will-Mer-  
East on random between 449,  
Bar 20° East

40.00 Set temporary  $\frac{1}{4}$  section post corner

80.49 Intersect North and south line,

5.2 links south of post corner  
S 89° 38' W on true line,

40.24 Set post corner for  $\frac{1}{4}$  section  
drove charred stake, dug pit,  
and raised mound as per  
instructions

80.49 To post corner,

X Land broken grass  
excellent. Soil 2<sup>nd</sup> Rate

North between sections 445,

40.00 Set post corner for  $\frac{1}{4}$  section, drove  
charred stake dug pits and  
raised mound as per instructions.

70.30 Intersected 1<sup>st</sup> Standard North  
6.45 West of Standard corner  
for sections 32433 T5NR 34E -  
Set post at point of intersection

29 429

Township of 4 North, Range 34 East, Will-Mer-

for closing corner for sections  
4 & 5. Drove charred stake, dug  
pit and raised mound of  
earth as per instructions.

Land broken. grass good  
Soil 2<sup>d</sup> Rate,

August 4<sup>th</sup> 1866.

\*

North between sections 31 & 32.

29.00 Road course N. E. & S. W.

40.00 Set post corner for <sup>1/4</sup> section

Drove charred stake, dug pit, and  
raised mound as per instructions

80.00 Set post corner for sections 29, 30.

31 & 32. Drove charred stake  
dug pit and raised mound  
as per instructions.

Land broken, grass excellent,

+ Soil 2<sup>d</sup> rate,

East on random between sections  
29 & 32.

430

Township No 4 North Range 34 East, Will-Mer-

Bar 20° East.

40.00 Set temporary 1/4 section post corner

79.52 Intersect North and south line

56 links North of post.

N 89° 36' W. on true line.

39.76 Set post corner for 1/4 section, drove  
charrred stake, dug pits and raised  
mound as per instructions

79.52 To post corner.

Land rolling, good grass,  
Soil 2<sup>d</sup> Kate,

+

West on random between sections

30 & 31.

40.00 Set temporary 1/4 section post corner,

80.08 Intersect North and South line

22 links South of post corner,

S 89° 51' E on true line.

40.08<sup>3</sup> Set post corner for 1/4 section

drove charrred stake, dug  
pits and raised mound as  
per instructions.

31 431

Township No. 4 North, Range 34 East - Will-Mer-

80.08 To post corner,

Land rolling, good grass,  
Soil 2<sup>d</sup> rate.

X

North between sections 29 & 30.

40.00 Set post corner for 1/4 section.

drove charred stake dug pit, and  
raised mound as per instructions

80.00 Set post corner for sections 19, 20,

29 & 30, drove charred stake dug  
pits and raised mound as  
per instructions.

Land rolling, grass excellent,  
Soil 2<sup>d</sup> rate.

X

East on random between sections  
20 & 29.

Bar 21° East

40.00 Set temporary 1/4 section corner

79.47 Intersected North and South  
line 36 chs North of post  
corner.

Township N. 4 North, Range 34 East, Will-ell-  
N 89° 45' W on true line,

3973 Set post corner for 1/4 section  
drove charred stake dug pits,  
and raised mound as per  
instructions,

7947 Go post corner,  
Land rolling grass Excellent  
Soil 2<sup>d</sup> rate,

X

West on random between sections  
19 & 30,

4000 Set temporary 1/4 section post corner

8012 Intersect North and south line  
17 lbs South of post,

S. 89° 53' E. on true line.

4012 Set post corner for 1/4 section,  
drove charred stake dug pits,  
and raised mound as per  
instructions,

8012 Go post corner.

Land rolling, grass

Excellent, Soil 2<sup>d</sup> Rate

E



Township 4<sup>th</sup> North, Range 34 East, Will. Mer.

North between sections 17 & 20.

40,000 Set post corner for 1/4 section, drove charred stake dug pits and raised mound as per instructions.

80,000 Set post corner for sections 17, 18,

19 & 20. Drove charred stake dug pits and raised mound as per instructions.

Land rolling grass excellent

\* Soil 2<sup>nd</sup> rate,

East on random between sections 17 & 20.

Bar 21° East,

40,000 Set temporary 1/4 section post corner

79,65 Intersected North and South line

28 lbs. North of post.

N 89° 48' West on true line

39,82 Set post corner for 1/4 section, drove

charred stake, dug pits and raised mound as per instructions.

79,65 To post corner,

Land rolling, grass.

Township No 4 North, Range 34 East Will. Mer-  
excellent, Soil 2<sup>nd</sup> Rate-

x

West on random between sections  
18 & 19.

40.00 Set temporary 1/4 section post,  
corner,

80.07 Intersected North and South  
line 23 lbs South of post.  
S 89° 50' E on true line

40.07 Set post corner for 1/4 section.  
Drove charred stake, dug pit,  
and raised mound as per  
instructions

80.07 To post corner  
Linnel rolling, grass  
good, Soil 2<sup>nd</sup> rate  
August 4<sup>th</sup> 1866.

x

North between sections 17 & 18,

40.00 Set 1/4 section corner post  
dove charred stake dug pit  
and raised mound as per

35

435

Township No 4 North, Range 34 East, Wyo. No.,  
instructions

80.00 Set post corner for sections 7, 8, 17 & 18

drove charred stake, dug pits, and  
raised mound as per instructions.

Land rolling, grass excellent  
soil 2<sup>nd</sup> rate,

X

East on random between sections

8 & 17.

Bar 21° East.

40.00 Set temporary  $\frac{1}{4}$  section corner post.

79.71 Intersected North and South line

39 lbs north of post.

N 89° 43' W. on true line.

39.85 Set post corner for  $\frac{1}{4}$  section, drove  
charred stake, dug pits, and  
raised mound as per instructions

79.71 To post corner.

Land rolling grass  
excellent. Soil 2<sup>nd</sup> Rate,

West on random between section

436

Township No. 4 North, Range 34 East, Will. Mer-  
7418.

40.00 Set post corner for 1/4 section temporary

80.09 Intersected North and south line  
25 links south of post corner,  
S, 89° 49' E, on true line.

40.09 Set post corner for 1/4 section, drove  
charred stake, dug pits and raised  
mound as per instructions.

80.09 Go post corner.

Land rolling, grass  
excellent - Soil 2<sup>nd</sup> Rate.

X

North between sections 748

40.00 Set post corner 1/4 section corner  
drove, charred stake, dug pits,  
and raised mound as per  
instructions.

80.00 Set post corner for 1/4 sections  
5. 6. 748. drove charred stake,  
dug pits, and raised mound  
as per instructions.

Land rolling, good grass, soil 2<sup>nd</sup> rate

+

372 437

Township No. 4 North, Range 34 East, Will-Mer-

com East on random between sections 548

40.00 Set temporary 1/4 section post corner

79.76 Intersect North and south line

18 links North of post corner,  
N 89° 52' W on true line

39.88 Set post corner for 1/4 section, drove

charred stake, dug pit and

raised mound as per instructions

79.76 To post corner.

Land rolling, grass excellent,

+ Soil 2<sup>nd</sup> Rate.

West on random between sections

647.

Bar 20° East.

40.00 Set temporary 1/4 section post corner

80.23 Intersect N & S line 42 links

South of post corner,

S 89° 42' E - on true line.

40.23 Set post corner for 1/4 section, drove

charred stake dug pit and

raised mound as per instructions.

Township No 4 North, Range 34 East, Will-Mer-

80.23 To post corner,

80.23 Land rolling, grass excellent,  
Soil 2<sup>d</sup> rate.

X

North between sections 546-

40.00 Set post corner for 1/4 section, drove  
charred stake dug pits, and  
raised mound as per instructions,

69.81 Set Closing corner for sections 546.

on 1<sup>st</sup> Standard North, 622 lbs

West of Standard corner for  
sections 81432. T5 N R34 E-

Drove charred stake, dug  
pits and raised mound as  
per instructions.

Land rolling, grass  
good, Soil 2<sup>d</sup> rate.

X

The lands in this Township  
are well adapted to stock  
raising being well covered  
with the very best of Buck

Township No. 4 North, Range 34 East, Will-Mes-  
grass, Wild Horse Creek runs through  
the South East corner furnishing  
the only watering places.

Timber is very scarce being confined  
to a narrow lining on the banks of  
the stream consisting of Balsam &  
Willow,

All of that portion on the south  
side of Wild Horse Creek is situated  
on the Amatilla Indian Reservation  
the creek being the boundary line  
on the north.

I apprehend there <sup>will be</sup> some difficulty  
in arranging the boundary line  
between the Reservation and  
Claimants along the Creek  
on the North side, since all the  
agricultural lands in the  
Township are immediately on  
the banks of the Creek,

The Creek is serpentine in its  
course, diagonally cutting the

440


Township No 4 North Range 34 East. Will-mer-  
Surveys, making it out of the question  
to secure to the Claimant all of the  
rich lands along the Stream by  
legal subdivisions without  
trespassing upon the Reservation.

To measure the Stream would be  
tedious and expensive, on account of  
the zigzag course of the channel and  
the difficulty of getting through  
the thick brush that lines the banks  
and overhangs the water.

I would therefore respectfully  
suggest, that an arrangement,  
if it could be made, after the  
plan of the accompanying diagram  
would accomplish the object  
and perhaps be as equitable &  
satisfactory as any arrange-  
ment that could be made.



# Diagram of Township No 4 North, Range 34 East,

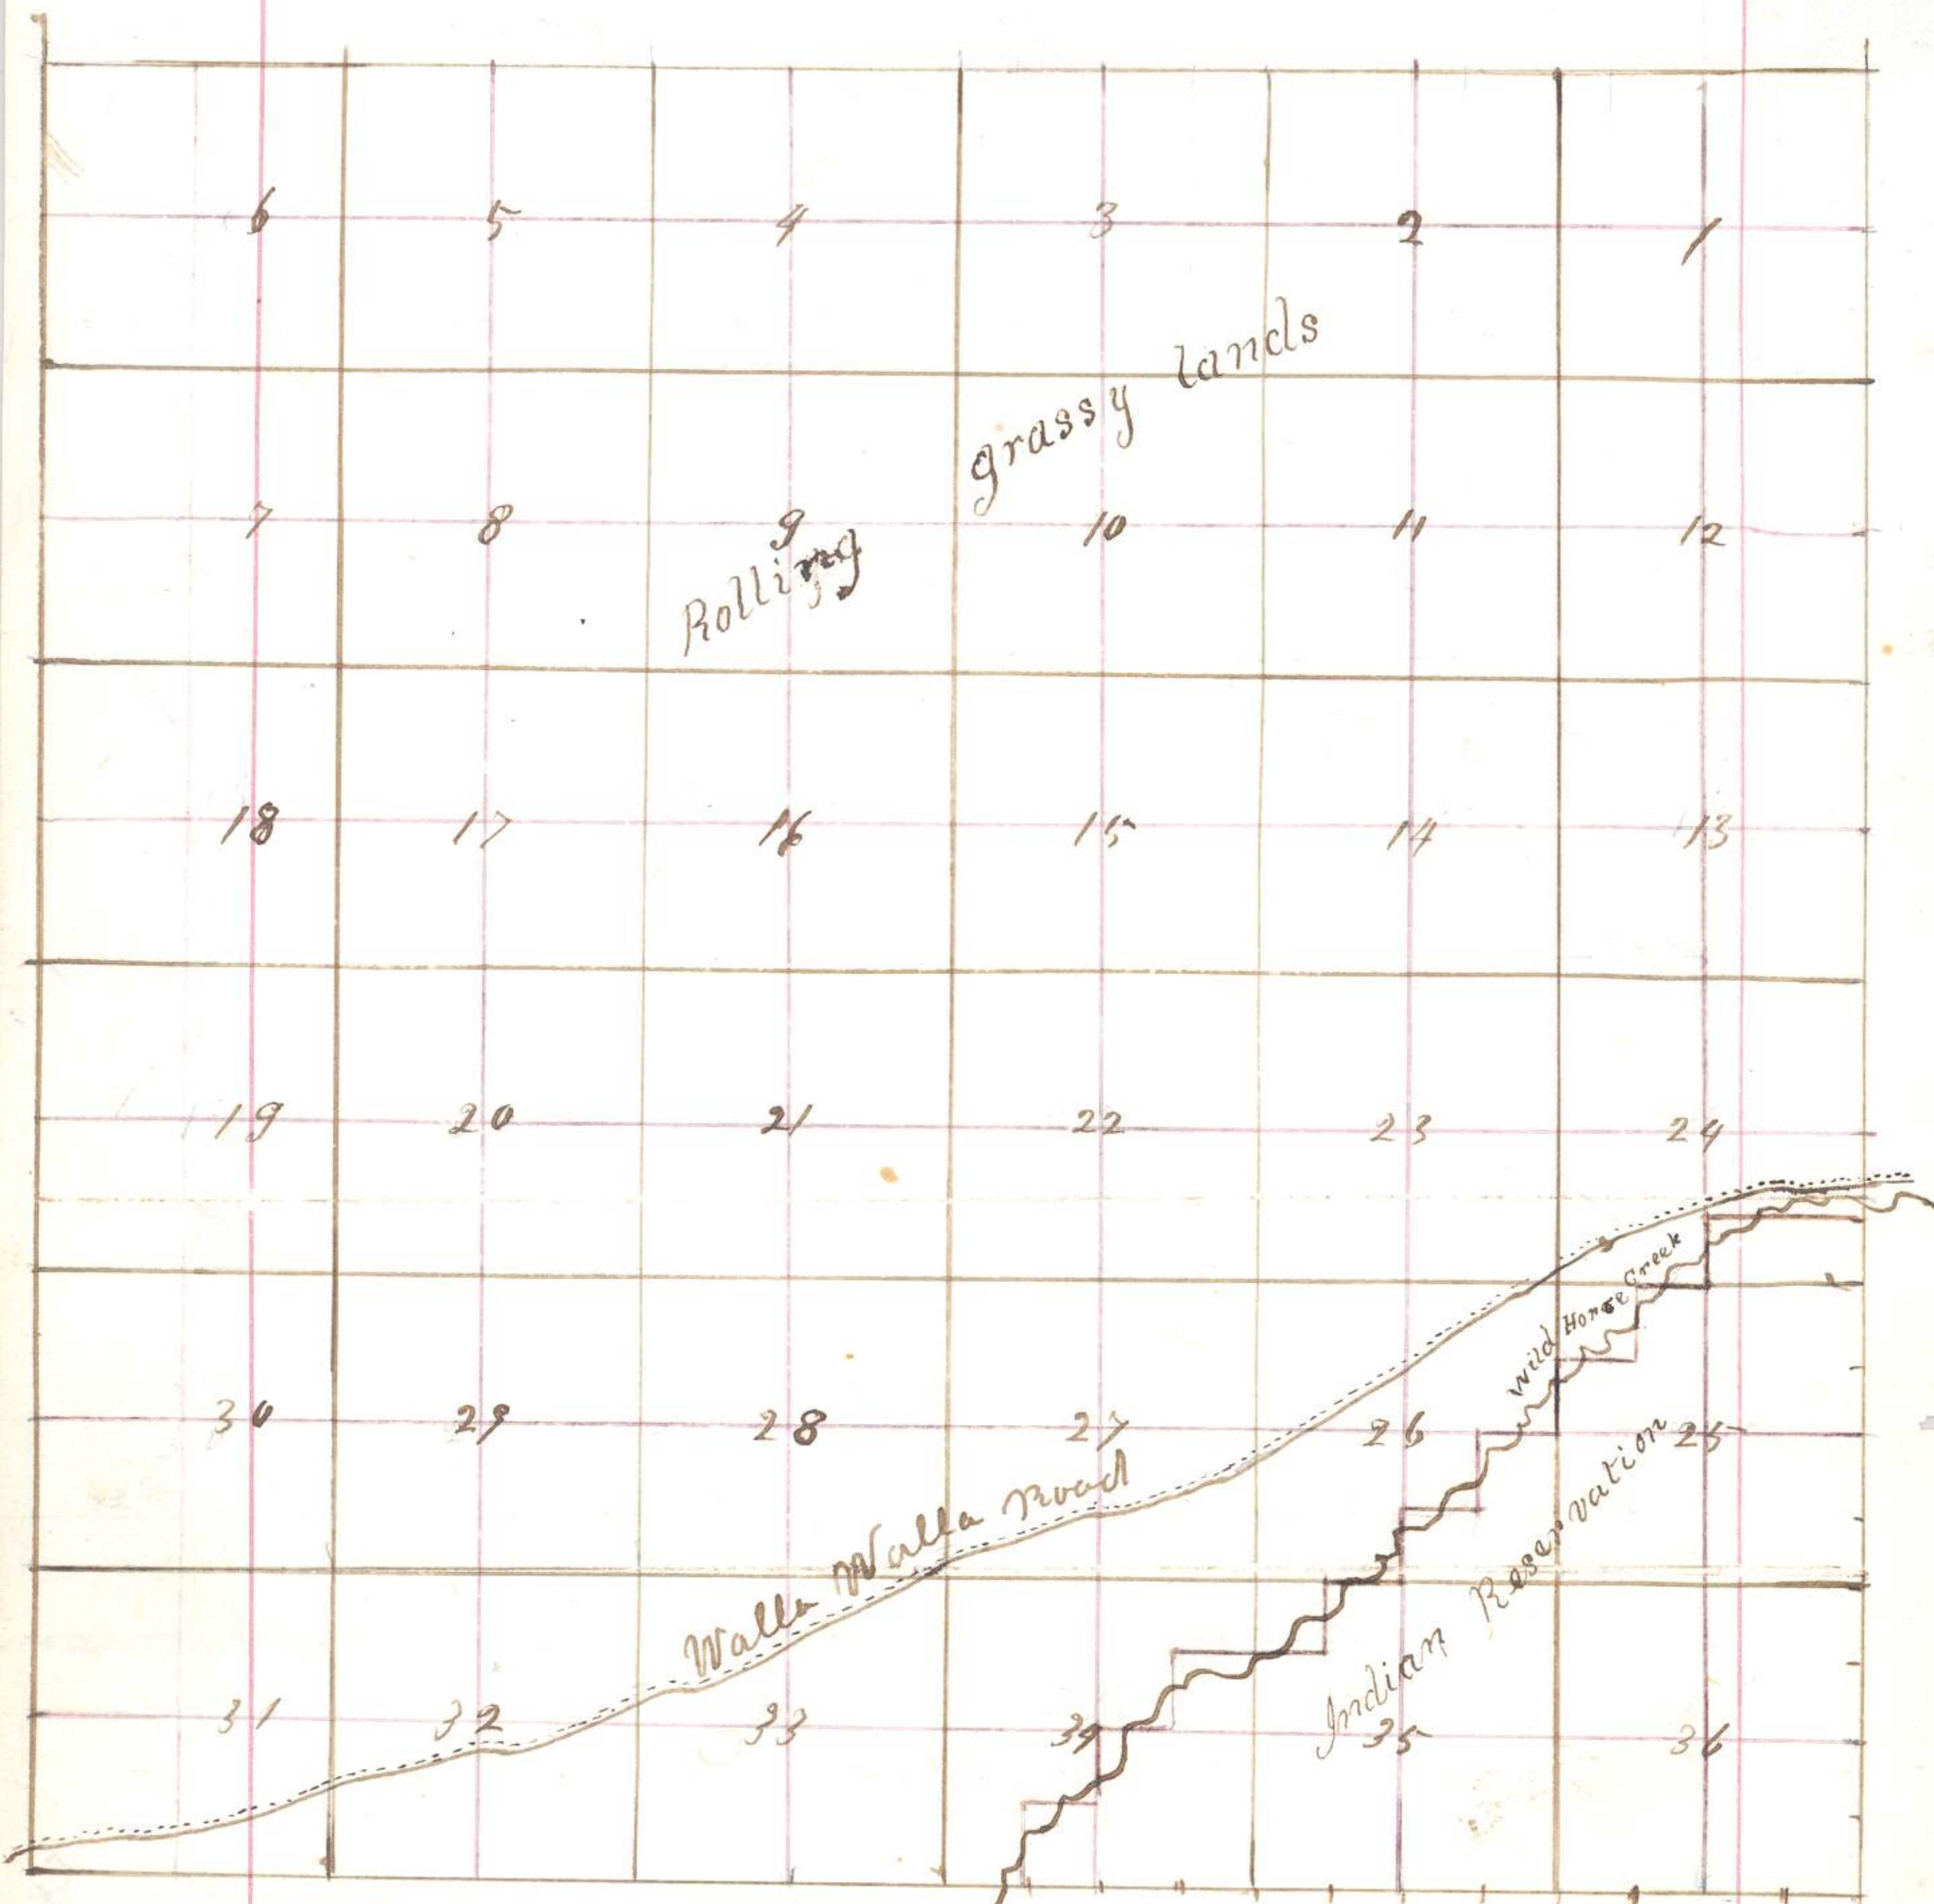

By the terms of the Treaty the boundary line between the Walla Walla Reservation and the Government lands is the channel of Wild Horse Creek. But I would suggest a change as indicated by the red lines in order to make it conform to the surveys.

A list of the names of the individuals employed to assist in running, measuring, or marking the lines and corners described in the foregoing field notes of Township No. 4 North of the Base Line of Range No. 34 East of Willamette Meridian, showing the respective capacities in which they acted:

J. J. Henderson	} Chairmen
John A. Bigg	
P. M. Demney	Axeman

+

We hereby certify that we assisted  
William H. Odell, deputy survey, in  
surveying the subdivisioal lines of  
Township No 4 North of Base Line of Range  
No 34 East of Willamette Meridian, and that  
said Township has been in all respects, to the  
best of our knowledge and belief, well and  
faithfully surveyed and the boundary  
monuments planted according to the  
instructions furnished by the Surveyor  
General.

J J Henderson Chairman  
J A Pigg Chairman  
P C M. Deming Foreman

State of Oregon  
County of Wasilla } ss, Subscribed and  
Sworn to before me this            day  
of September A.D. 1866, at  
William L. Waller  
Justice of the Peace

I William H. Odell, deputy surveyor, do solemnly swear that, in pursuance of a contract with E. S. Applegate surveyor of the public lands of the United States in the State of Oregon, bearing date the 2<sup>d</sup> day of July 1866, and in strict conformity to the laws of the United States and the instructions furnished by said Surveyor General, I have faithfully surveyed the subdivisions of Township number 4 North of the Base Line of Range 34 East of the Willamette Meridian, in the State aforesaid, and do further solemnly swear that the foregoing are the true and original field notes of such survey.

William H Odell

State of Oregon }  
 County of Lane } ss. Subscribed  
 and sworn to before me this  
 22<sup>nd</sup> day of December 1866

Joel War

Notary Public

449  
Surveyor General's Office

Eugene City, Jan 17th 1867

The foregoing field notes of the survey of  
the Subdivisional series of Township No 4  
North Range 34 East Will. Mer. Oregon  
Executed by William H. Odell, Deputy  
Surveyor under his contract No 114 bearing  
date July 2nd. 1866 having been critically  
examined the necessary corrections and  
examinations made the field notes and  
the surveys they describe are hereby  
accepted

E. L. Applegate

Surveyor General of Oregon