

# Index

## T. N. R. 35 E.

The following  
 notes unapproved -  
 by later survey  
 See Book 175  
 by J. N. R.

1	37
12	38
13	39
24	40
25	41
36	42

31	32	33	34	35	36
43	45	46	47	47	48

# Suspended

In error, unapproved - to be  
 re-surveyed - Ware

Commenced the Survey  
of the Exterior lines of  
Township No 4 North of  
Range 35 East of Will, Mer,  
June 1<sup>st</sup> 1855,

South between sections 6 & 1,  
Townships 4 North Ranges  
35 & 36 East of Will, Mer,  
Bar 20 East,

4000 Set  $\frac{1}{4}$  Section post corner <sup>30</sup>  
on corner gently slopes  
to the N, Drove chanced stake,  
dig pit, and raised  
mound as per instructions

5300 Road corner N, W, <sup>40</sup>

8000 Set  $\frac{1}{4}$  post corner for  
sections 1, 6, 12 & 17, on side  
hill slopes to the N, W,  
deposited marked stone  
dig pit and raised  
mound as per instructions

This line passes over

Township 4 N, Range 35 East, T11 S, R35 E, S36 N, rolling land good grass, soil good 2 1/2 Rate,

South between sections

12 & 7, Township 4 N Range 35 & 36 E

Bar 21 East,

25,10 Enter field course N, W, 80

28,70 Dry Creek 5 1/2 mile course N, W,

38,85 Leave field

40,00 Set 1/4 Section post, 50

on hill side facing the

East, Drove charred stake  
my pit and raised mound  
as per instructions,

8,000 Set a post corner for 75-  
sections 7, 12, 13 & 18.

Land slopes to the North,

Drove charred stake

my pit and raised

mound as per instructions

Land broken

Township 4th, Range 35 East Will, Mex,  
 Grass good Soil, good  
 2<sup>d</sup> Rate,

South between sections

13 & 18. Township 4th, Range 35 East  
 base 90° East,

40,00 Set 4 sections Land slopes  
 to the N, E. Drive charred stake  
 dig pits and raised mound  
 as per instructions

8,000 Set a post corner for section  
 13. 24. 18 & 19, on ridge course  
 N, W, dig pits Drive  
 charred stake, and raised  
 mound as per instructions

Land broken

Good grass

Soil 2<sup>d</sup> Rate

Township 40 N Range 35 East Will, Mer,

South between sections 24 & 19

Townships 4 N. Ranges 35 & 36 East  
Variation 19° 30' East,

3400 a branch 2 lbs wide course, W, 90

4000 Set 4 section post corner  $\pm$  20

on side hill facing the N, E,

from which a pine

36 in, dia, bears N 20° W, 120 lbs

8000 Set a post corner, 100

for sections 19, 30, 24 & 25, on  
hillside slopes to the N, E,

from which a Pine

20 in, dia, bears N, 25° W, 163 lbs

30 do, do, do, S, 72° E, 20 do,

Drive Churned Stake,

and dug pit and

raised mound as per  
instructions.

Land taken good

grass. Soil good

Low Rate

Township 4 N Range 35 East Will, Mex

South between sections 25 & 30,  
Townships 4 N Ranges 35 & 36 East,  
Rur 19° East,

40.00 Set  $\frac{1}{4}$  sections post, on  
side hill facing the S.E.,  
dig pits and raised  
mound as per instructions

80.00 Set a post corner for  
sections, 30, 31, 25 & 36, on  
hill side slopes to the S.E.  
deposited marked stone  
dig pits, and raised mound  
as per instructions.

Land broken, good grass,  
soil good second rate,  
Some scattering pine  
timber to the east of the  
line.

Township 4 N Range 35 East, Will, Mex,  
South between section

21 & 36 Townships 4 N Ranges

25 & 36 East,

Variations 19° E —

4,000 Set 1/4 Section post corner, 30

on hill side facing the East,

from which a pine

36 in, dia, bears N 58° E, 74 lbs,

~~near~~ other tree near

Dry pits and raised

ground as per instructions

6,390 Pine Creek 20 lbs wide, course

N W

50

8,000 Set a post corner for ~~xxx~~ 50

Townships 3 & 4 North of Base

Line of Ranges 25 & 36 East

of Willamette Meridian, and

for sections 1, 6, 31 & 36,

from which

A Pine 42 in, dia, bears N 54° W, 18 lbs

do do 20 do do do N 27° E, 116 do

do do 15 do do do S 1° E, 50 do,

Township 4 N Range 35 East Will, Mex,  
 A Pine 20 in dia, bears South 37° W 68 lbs,  
 This line passes down a  
 Ravine to Pine Creek,  
 Some scattering pines in Ravine  
 and Timber to the South  
 of Pine Creek,

start ~~X~~ X

Opp  
 West on Random between  
 Townships 37 4 North  
 Range 35 East and South  
 at 4000 and 8000 chs  
 set mile and half Mill  
 post, at 483.00 Interest  
 N, 93, Line 15.0 chs  
 South of post corner  
 for Townships 37 N Ranges  
 34 & 35 E, Hence the correction  
 will be S 89° 45' East on true  
 Line,

June 9<sup>th</sup> 1865

S 89° 45' E on true Line




502

We hereby certify that  
 we assisted William H.  
 Odell and William S.  
 Lewis, deputy surveyors,  
 in surveying and marking  
 the following lines, to wit;  
 The 1<sup>st</sup> Standard Parallel North  
 between Townships 4 & 5 and  
 East through Ranges 31. 32,  
 33. 34. 35. & 37. East of Will. Mer,  
 also the subdivisional lines  
 of Townships 5 N. Ranges 33. 35 & 36 E.  
 do, 6 N. do, 34. 35 & 36 do,  
 do 4 do, do, 32 & 33 do,  
 and the exteriors of Townships  
 5 N Range 35. 36,  
 6 do, do, 34. 35. 36 & 37 East  
 4 do do 31. 33. & 35 do,  
 and that said lines  
 have been in all respects

To the best of our knowledge  
and belief, well and  
faithfully surveyed, and  
the boundary monuments  
planted according to the  
instructions furnished by  
the Surveyor General.

Cyrus Dion Chairman  
Robert Beck Assessor

State of Oregon }  
County of Benton } 1865 Subscribed  
and sworn to before me  
this 17 day of June 1865  
Geo. W. W. W.  
Notary Public

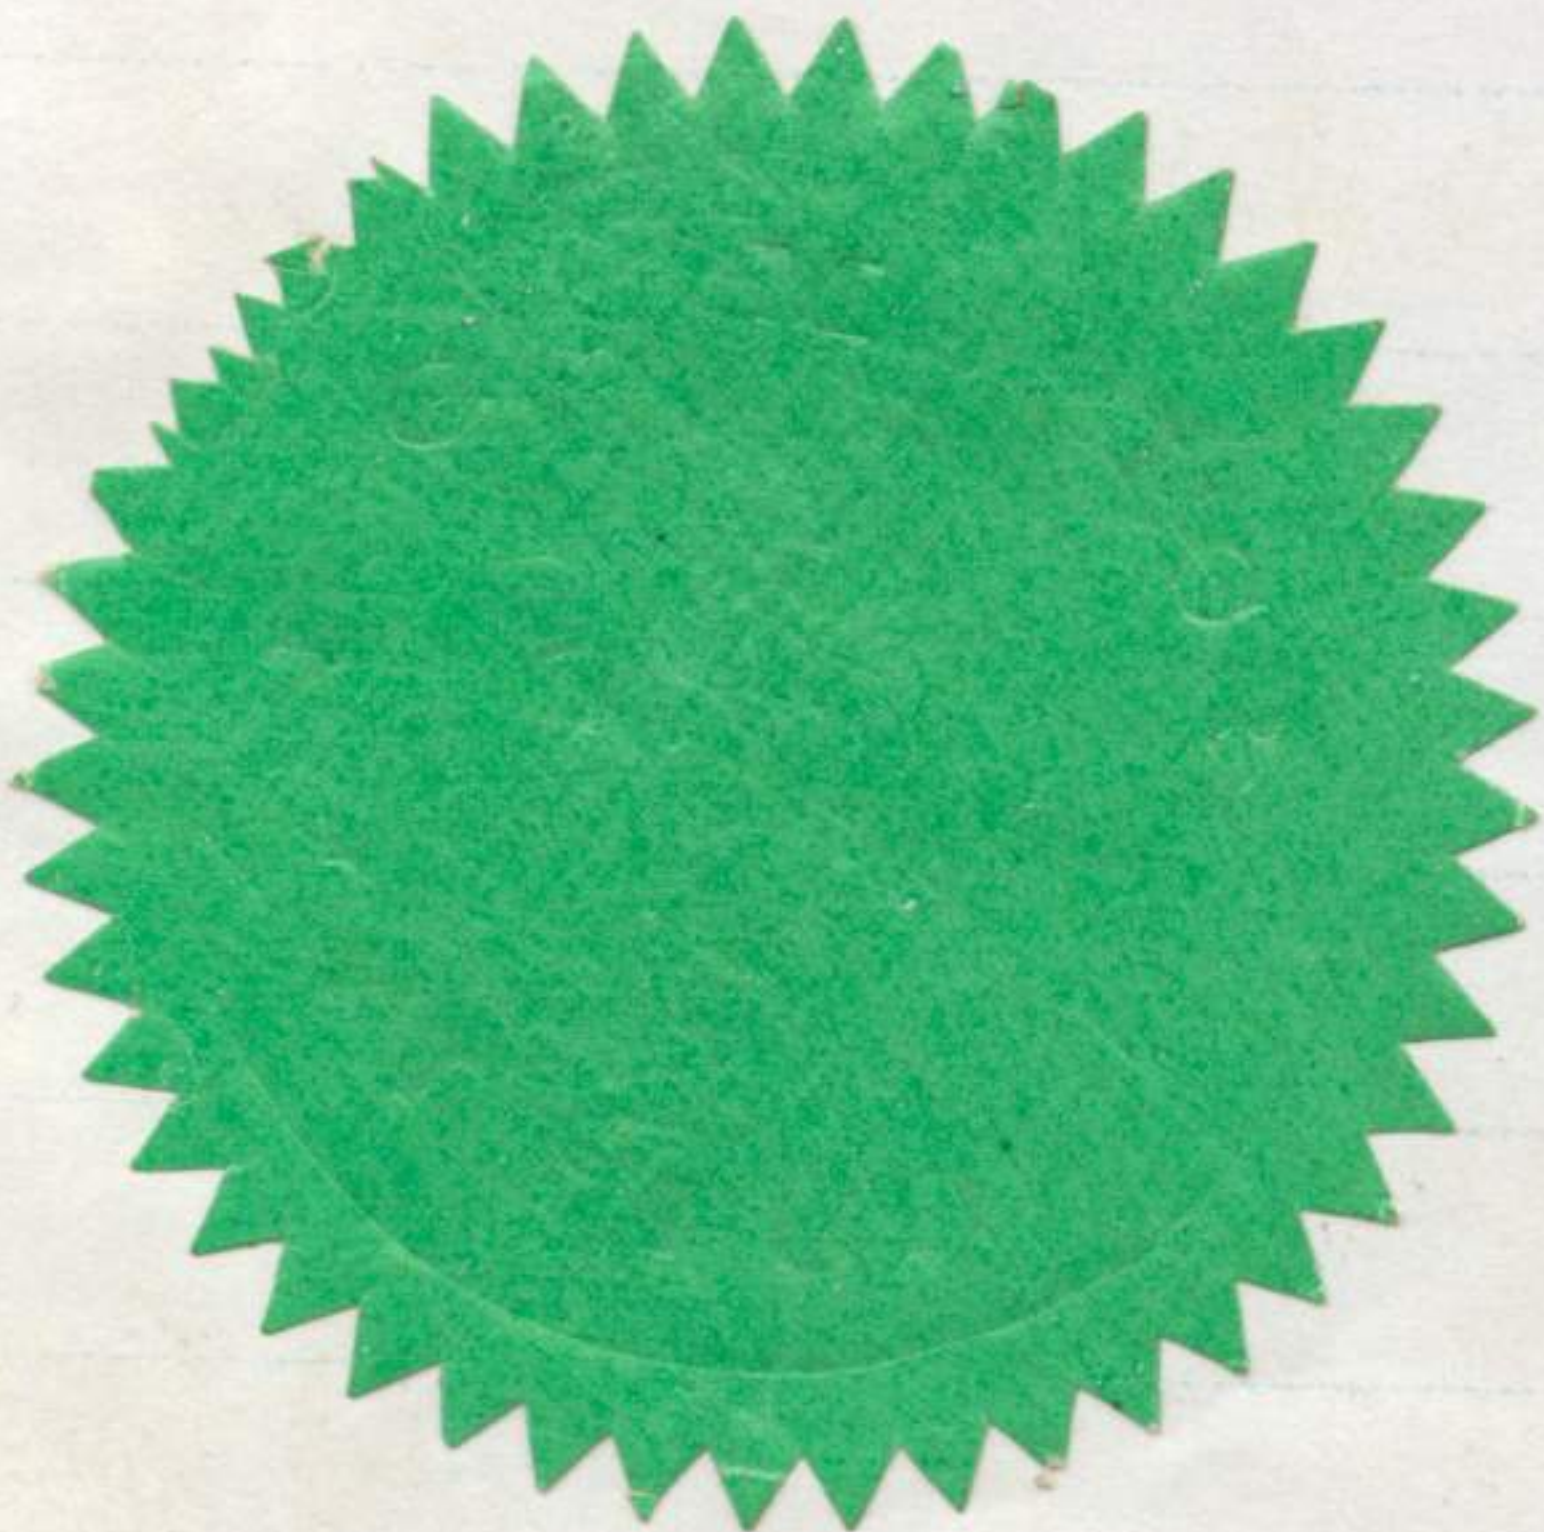

506

602

P.  
666-601  
Blank



I hereby certify that I assisted  
William H. Odell and William S.

Lewis deputy surveyor, in surveying  
the following lines, to wit;

The ~~1st~~ Standard Parallel North  
between Townships 4 & 5 North and

East through Ranges 31. 32. 33. 34.

35. & 37. East of Willamette Meridian

also the subdivisional lines

of Townships Nos 5 North Ranges 33. 35. & 36 E,

do, do, 6 do, do, 34. 35 & 36 do,

do, do, 4 do, do, 32 & 33 do,

and the Exterior of Townships

Nos 5 North Range 35 & 36, 37 East

do, 6 do, do, 34. 35. 36 & 37, do,

do, 4 do, do, 31. 33. & 35, do,

and that said lines have

been in all respects

to the best of my knowledge and  
 belief, well and faithfully surveyed,  
 and the boundary monuments  
 planted according to the instructions  
 furnished by the Surveyor General,  
 D. C. Wallace Chairman

State of Oregon )  
 County of Lane ) ss.

Sworn & subscribed before me this  
 24<sup>th</sup> day of June 1865

Joel Mann  
 Notary Public

